



High-Grades Continue to Extend Kavanagh

Black Cat Syndicate Limited (“**Black Cat**” or “**the Company**”) is pleased to provide an update on drilling activities at the 100% owned Coyote Gold Operation (“**Coyote**”) in Western Australia.

HIGHLIGHTS

- Drilling has continued to identify high-grade shear-hosted quartz mineralisation within the hinge zone of the Coyote Anticline (“**the Axial Core Zone**”) which hosts the Kavanagh and Speedy Resources (131koz @ 10.1g/t Au).
- Recent drilling extended mineralisation ~25m up dip from Kavanagh towards Speedy, increasing confidence that these two separate Resources may merge within this untested zone. Results from up dip of Kavanagh include:
 - **1.20m @ 39.33g/t Au from 400.40m &**
 - **1.00m @ 63.70g/t Au from 410.60m** (22CYDD009)
- The drilling also extended mineralisation ~50m down dip from Kavanagh with results including:
 - **4.46m @ 7.71g/t Au from 496.84m** (22CYDD007a)
- Drilling confirms and validates Black Cat’s new geological model and extends Kavanagh both up and down dip, demonstrating the growth potential of the high-grade Resources within the Axial Core Zone.
- Two diamond holes have also intersected quartz veining in a previously untested area east and below Kavanagh.
- These results complement previously reported results from the Axial Core Zone, including¹:
 - **1.00m @ 114.00g/t Au from 388m** (22CYDD004)
 - **1.68m @ 22.30g/t Au from 438.32m** (22CYDD003a)
 - **2.48m @ 10.35g/t Au from 426.38m** (22CYDD001)
- Diamond and RC drilling is ongoing, targeting the Axial Core Zone with 20 holes completed to date, all of which intersected quartz veins in interpreted positions.
- Mineral Resource update to be completed in the current December 2022 quarter.

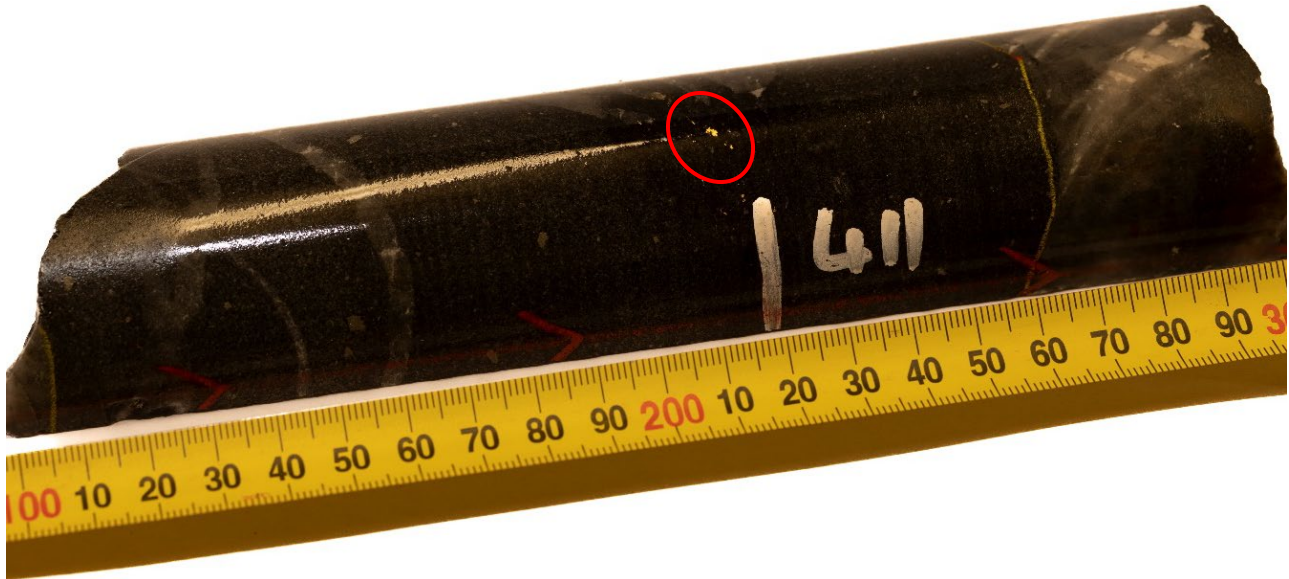


Figure 1: Core containing multiple specs of visible gold from hole 22CYDD009 at 411m. This interval returned 1.00m @ 63.70g/t Au from 410.69m

Black Cat’s Managing Director, Gareth Solly, said: “*These results are significant as they validate our new geology model and have demonstrated the high-grade growth potential of Kavanagh and the wider Coyote Central system into areas previously considered to be less prospective. Two more diamond holes down plunge to the east of Kavanagh and an additional two RC holes completed between Kavanagh and Speedy have intersected quartz veining with assays pending. RC and diamond drilling is ongoing with additional holes testing the shrinking gap between and beyond Speedy and Kavanagh. A new Resource for Coyote Central will be completed in the current quarter and will include these significant results. We expect continued Resource growth from there with further drilling.*”

High-Grades Continue to Extend Kavanagh

SNAPSHOT – COYOTE GOLD OPERATION

100% Controlled by Black Cat

- 440km² of highly prospective ground, 100% owned and controlled by Black Cat.

Background

- Open pit and underground workings to a depth of ~320m below surface, which produced a combined ~211koz @ 4.9g/t Au @ 95.8% recovery.
- Current Resource of 488koz @ 5.1g/t Au.
- Care and maintenance since 2013.
- No systematic exploration undertaken for ~10 years prior to Black Cat's ownership in mid-2022.

Infrastructure in Place

- <1km from Tanami Highway (Federal funding pledged for sealing).
- 180+ person camp and offices, partially sublet to several other companies.
- Mines and key targets on granted Mining Licences.
- 300ktpa processing facility with potential to upgrade.
- Airstrip.
- Processing Water readily available.

Significant Opportunities at All Stages

- Since completing the Coyote acquisition in June 2022, Black Cat has assessed the opportunities based on geology, maturity and risk/reward. The segments defined at Coyote are:
 - Coyote Central: mineralisation over ~1,200m in strike and down to ~700m in depth. Current Resource contains 267koz @ 10.4g/t Au and the Coyote Central produced 179koz @ 6.0g/t Au historically from underground, open pits and surface paleochannels.
 - Coyote West: a 2.5km long, highly prospective zone of near-surface anomalism in a potential fault offset position from Coyote Central which appears to be plunging to the west. The area lacks systematic testing.
 - Coyote East: This area hosts numerous near mine opportunities and drilling has largely been ineffective.
 - Bald Hill: located 30km from the central processing facility with historical open pits producing 42koz @ 2.7g/t Au. Bald Hill remains open and has potential to increase the current open pit Resource of 198koz @ 3.6g/t Au.
 - Regional: Numerous high priority targets including Coyote Syncline, Road Runner, Penfold and Gremlin (Ni-Co-PGE) requiring testing in 2023.

New Geological Model Unlocking Significant High-grade Gold Potential with Scale

- Previous interpretations focussed primarily on bedding-parallel mineralisation in the steeply-dipping South Limb of the Coyote Anticline, which hosts the majority of the historically-mined Resources.
- Drilling at the largely untested Axial Core Zone of Coyote Central, based on the updated geological model¹, has intersected anomalous gold in 100% of holes.
- Current Resources of 488koz @ 5.1g/t Au are expected to grow and upgrade in the December 2022 quarter with ongoing updates thereafter.
 - Coyote Central UG 0.8Mt @ 10.4g/t Au for 267koz
 - Bald Hill OP 1.2Mt @ 3.0g/t Au for 120koz
 - Bald Hill UG 0.5Mt @ 4.9g/t Au for 84koz
 - Stockpiles 0.4Mt @ 1.4 g/t Au for 17koz

Significant, Regional Multi-metal Potential Identified

- New geological models developed after integrating all available data.
- Regional geophysical data being reprocessed.
- Key targets include:
 - Coyote Syncline: arsenic anomaly in a favourable interpreted structural setting to northwest of Coyote.
 - Pebbles to Road Runner Corridor: large gold anomalies along Trans-Tanami fault structure south of Coyote, largely under post-mineralisation cover.
 - Penfold: arsenic and gold anomaly in a potential structural trap east of Coyote.
- EIS funded drilling in 2020 intersected fertile Ni-Co-PGE sulphide system at Gremlin with follow-up required.

Analogous to One of the World's Best Gold Mines, 200km Away

- Coyote is within the same structural corridor as Callie (14Moz), with both deposits hosted in anticlines of folded sediments on splays off the Tanami Fault. There are multiple mineralisation styles within the Callie area, while currently only a single mineralisation model has been historically applied and tested at Coyote.

¹ Refer ASX announcement 9 September & 10 October 2022

High-Grades Continue to Extend Kavanagh

Diamond Drilling at Coyote Central

Coyote Central has a strike length of ~1,200m and gold mineralisation has been identified to a depth of ~700m below surface in historic drilling. Figure 2 shows a long section through Coyote Central and highlights the following:

- Open pit and underground workings to a depth of ~320m below surface, which produced a combined ~168koz @ 6.0g/t Au;
- Current high-grade Resources of 267koz @ 10.4g/t Au (dark pink) that will be updated in the current quarter;
- Mineralised quartz lode structures (light pink) representing drill targets, currently outside of Resources;
- Untested and under-tested structural targets (yellow); and
- The current area of drilling activities in the unmined eastern portion of Coyote Central which hosts the prospective Axial Core Zone (drilling pierce points).

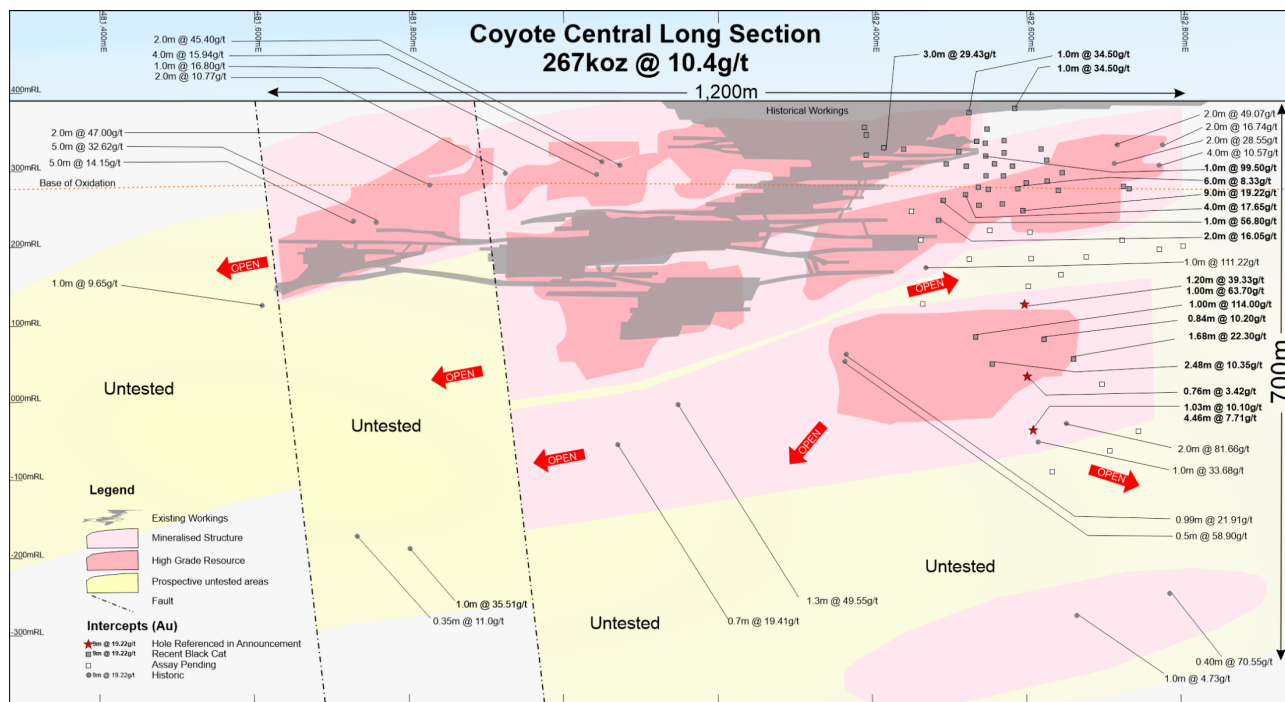


Figure 2: 1,200m long Coyote Central long-section highlighting the extent of historic mining, the current high-grade Resources (267koz @ 10.4g/t Au), interpreted mineralised structures and the area of current drilling activities in the Axial Core Zone to the east.

Diamond and RC drilling is ongoing, with the first 20 holes of the current program completed. All completed holes have intersected quartz lodes in the interpreted positions. Results from the three most recently assayed holes have extended mineralisation both up and down dip of Kavanagh validating the new geology model and the potential for significant Resource growth.

Approximately 25m up dip from Kavanagh, towards Speedy, results include:

- **0.20m @ 10.00g/t Au from 394.50m, 1.20m @ 39.33g/t Au from 400.40m and 1.00m @ 63.70g/t Au from 410.60m** (22CYDD009)

Two holes also intersected mineralisation up to 50m down dip from Kavanagh with results that included:

- **0.29m @ 6.63g/t Au from 440.27m** (22CYDD005a)
- **0.21m @ 45.50g/t Au from 415.74m, 1.93m @ 10.10g/t Au from 443.35m and 4.46m @ 7.71g/t Au from 496.84m** (22CYDD007a)

Previously reported holes from the Axial Core Zone include¹:

- **2.48m @ 10.35g/t Au from 426.38m and 0.80m @ 17.10g/t Au from 434.40m** (22CYDD001)
- **1.00m @ 114.00g/t Au from 388m** (22CYDD004)
- **1.68m @ 22.30g/t Au from 438.32m** (22CYDD003a)

Two more diamond holes (22CYDD010 and 22CYDD011) drilled to the east of Kavanagh have intersected quartz veining along strike in an untested region at similar depths. Additional RC drilling has also been completed targeting the Axial Core Zone between Kavanagh and Speedy along an ~400m strike length to close the (now only ~125m) gap between the Kavanagh and Speedy Resources. Whilst assays are pending for all these holes, geological logging is encouraging with quartz vein mineralisation intersected where expected.

The current Resource of 267koz @ 10.4g/t Au is based on historical concepts, which interpreted mineralisation to be largely confined to the steeply dipping South Limb of the Coyote Anticline. Recent reinterpretation by Black Cat has highlighted the significant growth potential, particularly within the Axial Core Zone (Figure 3). An updated Resource will be announced during the December 2022 quarter.

High-Grades Continue to Extend Kavanagh

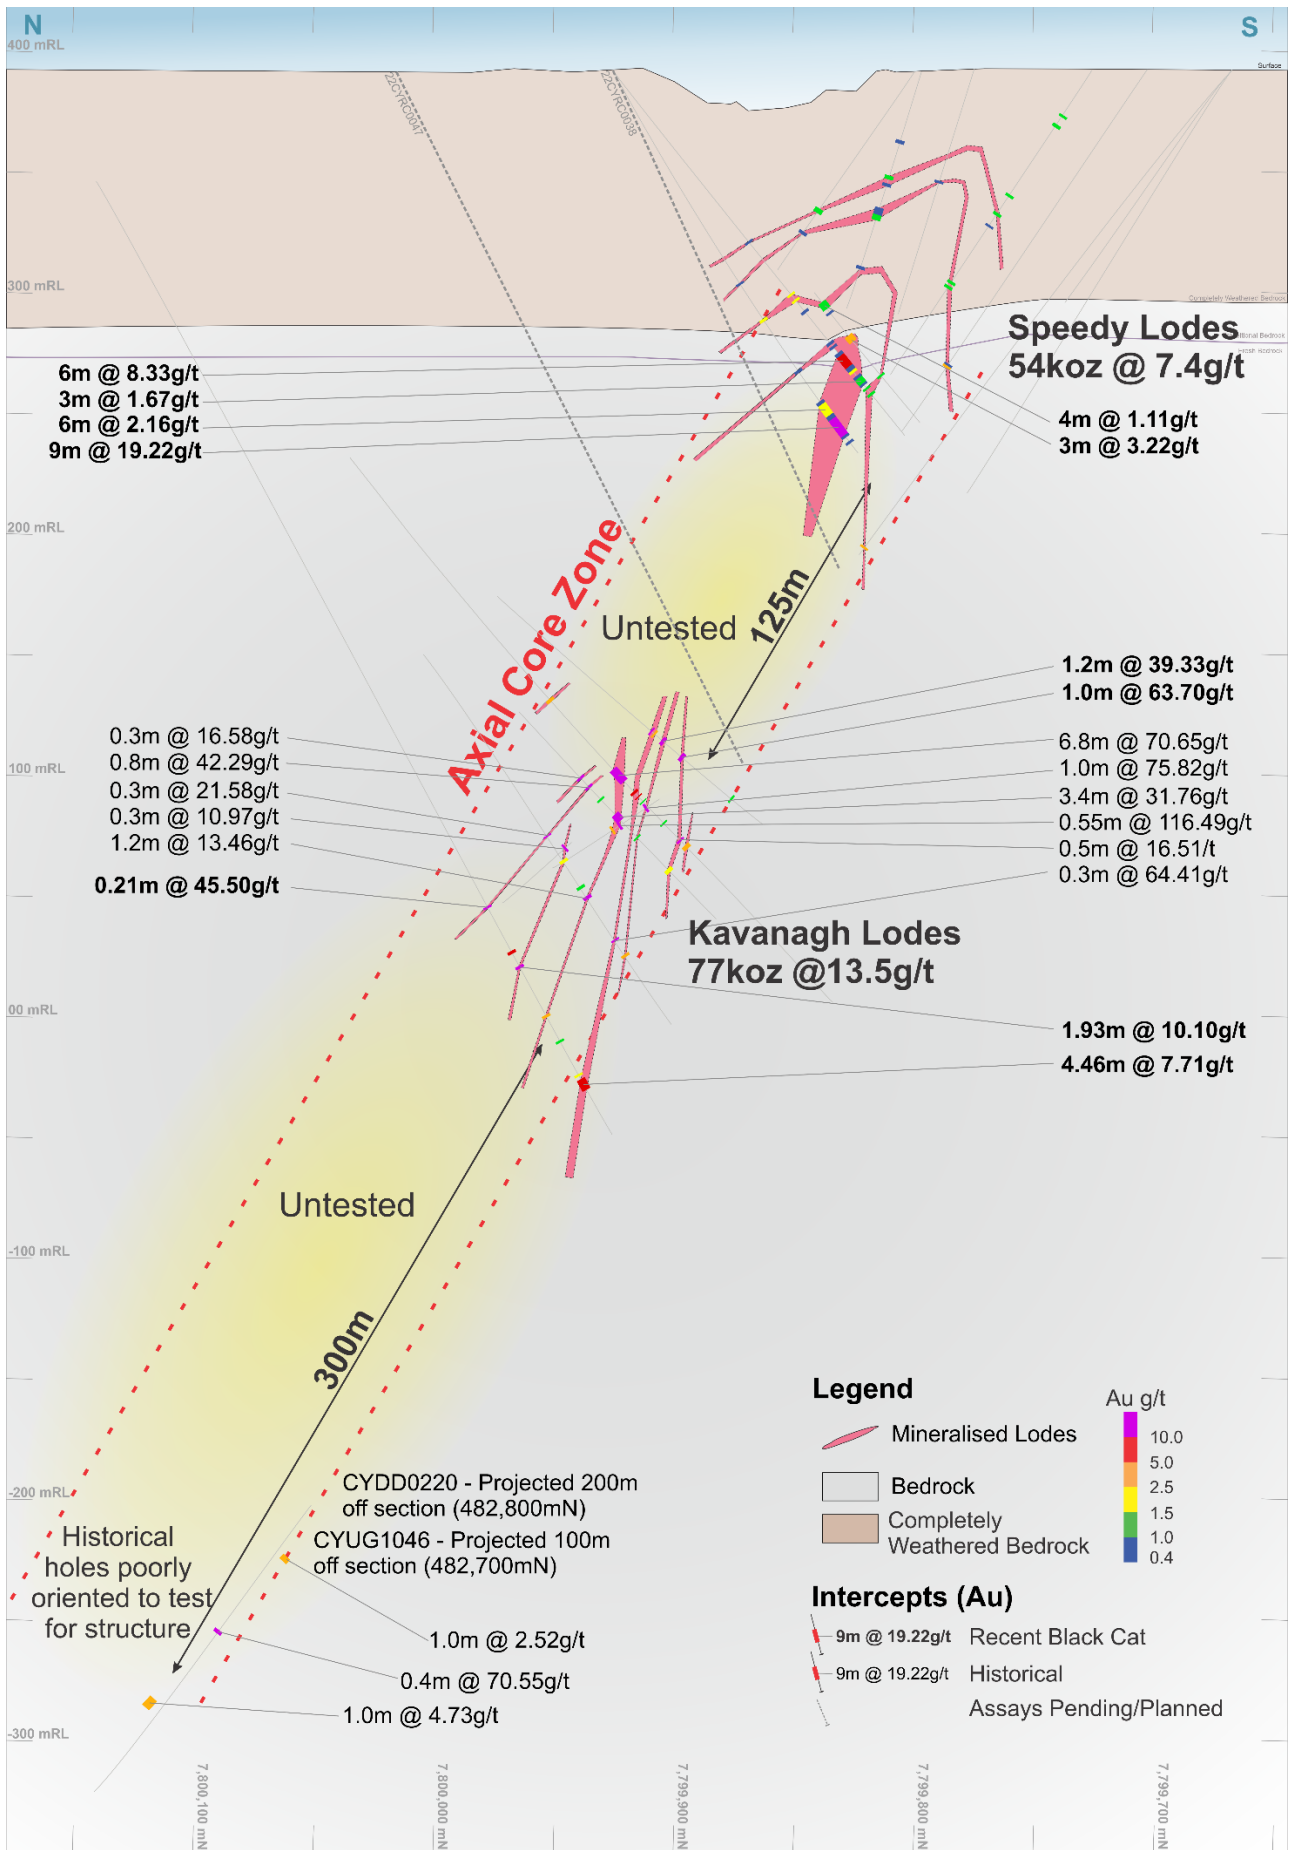


Figure 3: Cross-section 482,600mN looking east highlighting the highly prospective Axial Core Zone and showing significant intercepts from 22CYDD005a, 22CYDD007 and 22CYDD009. Previously reported significant results from 22CYRC0024 and 22CYRC0035 are also shown, as are the hole traces of two pending RC holes

High-Grades Continue to Extend Kavanagh



Figure 4: Core photo of 22CYDD007A showing arsenopyrite from an ~8m interval. Assays results are 4.46m @ 7.71g/t Au from 496.84m (including 0.71m @ 20.20g/t Au from 497.64m)

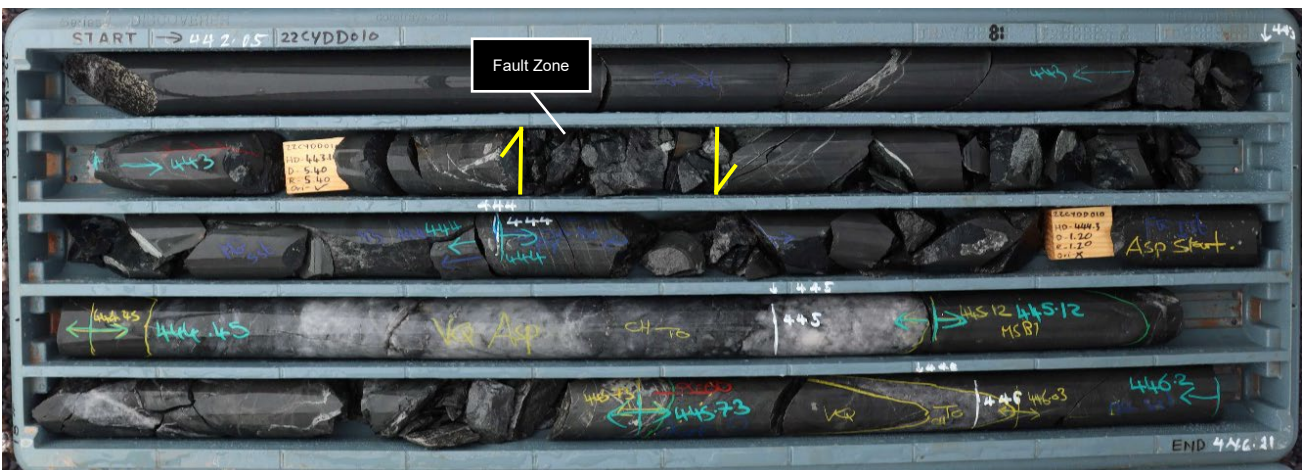


Figure 5: Photo of 22CYDD010 (442.15-446.11m) core showing a fault zone and associated quartz vein mineralisation from the Axial Core Zone. Assays are pending for this interval

Note: with respect to gold and potential mineralised zones identified during logging, any visual estimates are uncertain in nature and should not be taken as a substitute for appropriate analysis. Assay results will be reported when received. Visual estimates of sulphide mineral percentages are based on preliminary visual observations of the drill core surface as presented in the core trays and may not be representative of wider mineralisation. Visual estimates of sulphide mineral abundance are not considered to be a proxy or substitute for laboratory analyses where metal concentrations or grades are the factor of principal economic interest.

High-Grades Continue to Extend Kavanagh

Planned Activities

| Planned Activities | Oct-22 | Nov-22 | Dec-22 | Jan- 23 | Feb-23 | Mar-23 | Apr-23 |
|-----------------------------------------------------|--------|--------|--------|---------|--------|--------|--------|
| Drilling - Kal East | | | | | | | |
| Drilling - Coyote | | | | | | | |
| Drilling - Paulsens | | | | | | | |
| Myhree - potential open pit mining & toll treatment | | | | | | | |
| Quarterly Reports | | | | | | | |
| Annual General Meeting | | | | | | | |

For further information, please contact:

Gareth Solly
Managing Director
+61 458 007 713
admin@bc8.com.au

Michael Vaughan
Fivemark Partners
+61 422 602 720
michael.vaughan@fivemark.com.au

This announcement has been approved for release by the Board of Black Cat Syndicate Limited.

COMPETENT PERSON'S STATEMENT

The information in this announcement that relates to geology, and planning was compiled by Dr. Wesley Groome, who is a Member of the AIG and an employee, shareholder and option holder of the Company. Dr. Groome has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Dr. Groome consents to the inclusion in the report of the matters based on the information in the form and context in which it appears.

The Company confirms that it is not aware of any new information or data that materially affects the information in the original reports, and that the form and context in which the Competent Person's findings are presented have not been materially modified from the original reports.

Where the Company refers to the exploration results, Mineral Resources, and Reserves in this report (referencing previous releases made to the ASX), it confirms that it is not aware of any new information or data that materially affects the information included in that announcement and all material assumptions and technical parameters underpinning the Mineral Resource and Reserve estimates with that announcement continue to apply and have not materially changed.

High-Grades Continue to Extend Kavanagh

TABLE 1: DRILL RESULTS

| Hole ID | Kavanagh Diamond Drilling | | | | | Downhole | | | |
|------------------------|---------------------------|-----------|-----|-----|---------|----------|--------|--------------|----------------|
| | MGA East | MGA North | RL | Dip | Azimuth | From (m) | To (m) | Interval (m) | Au Grade (g/t) |
| 22CYDD001 ² | 482588 | 7800177 | 415 | -50 | 182 | 415.79 | 418.41 | 2.62 | 1.03 |
| | | | | | | 426.38 | 428.86 | 2.48 | 10.35 |
| | | | | | | 434.4 | 435.2 | 0.80 | 17.10 |
| | | | | | | 437.4 | 438.3 | 0.90 | 3.20 |
| | | | | | | 441.20 | 442.30 | 1.10 | 1.22 |
| 22CYDD002 | 482610 | 7800172 | 413 | -50 | 176 | 403.10 | 404.77 | 1.67 | 5.29 |
| | | | | | | 406.60 | 407.31 | 0.71 | 5.51 |
| | | | | | | 427.35 | 428.20 | 0.85 | 10.20 |
| 22CYDD003a | 482610 | 7800172 | 413 | -54 | 172 | 438.32 | 440.00 | 1.68 | 22.30 |
| | | | | | | 443.00 | 444.07 | 1.41 | 1.07 |
| 22CYDD004 | 482563 | 7800167 | 412 | -50 | 185 | 388.00 | 389.00 | 1.00 | 114.00 |
| | | | | | | 397.50 | 399.00 | 1.50 | 1.45 |
| | | | | | | 409.43 | 412.00 | 2.57 | 2.39 |
| | | | | | | 422.47 | 423.00 | 0.53 | 4.81 |
| | | | | | | 426.00 | 426.30 | 0.30 | 2.46 |
| 22CYDD005a | 482563 | 7800167 | 412 | -57 | 180 | 440.27 | 440.56 | 0.29 | 6.63 |
| | | | | | | 450.30 | 450.57 | 0.27 | 2.34 |
| | | | | | | 453.27 | 454.03 | 0.76 | 3.42 |
| | | | | | | 457.24 | 459.00 | 1.76 | 1.31 |
| 22CYDD007a | 482610 | 7800173 | 413 | -60 | 183 | 415.74 | 415.95 | 0.21 | 45.50 |
| | | | | | | 436.15 | 437.30 | 1.15 | 5.90 |
| | | | | | | 443.35 | 444.38 | 1.03 | 10.10 |
| | | | | | | 446.40 | 447.47 | 1.07 | 3.18 |
| | | | | | | 478.55 | 479.20 | 0.65 | 1.44 |
| | | | | | | 494.26 | 494.80 | 0.54 | 1.89 |
| 22CYDD009 | 482591 | 7800171 | 412 | -50 | 183 | 496.84 | 501.30 | 4.46 | 7.71 |
| | | | | | | 394.50 | 394.70 | 0.20 | 10.00 |
| | | | | | | 395.80 | 396.90 | 1.10 | 2.55 |
| | | | | | | 400.40 | 401.60 | 1.20 | 39.33 |
| | | | | | | 410.60 | 411.60 | 1.00 | 63.70 |
| | | | | | | 437.75 | 438.45 | 0.70 | 1.31 |
| 22CYDD010 | 482608 | 7800176 | 412 | -64 | 155 | | | | Assays Pending |
| 22CYDD011 | 482610 | 7800174 | 412 | -57 | 160 | | | | Assays Pending |

Note: All significant intercepts are reported at 1 g/t Au cut; maximum of 1m continuous internal dilution

² Previously reported, refer to ASX Release Dated 09/09/2022

High-Grades Continue to Extend Kavanagh

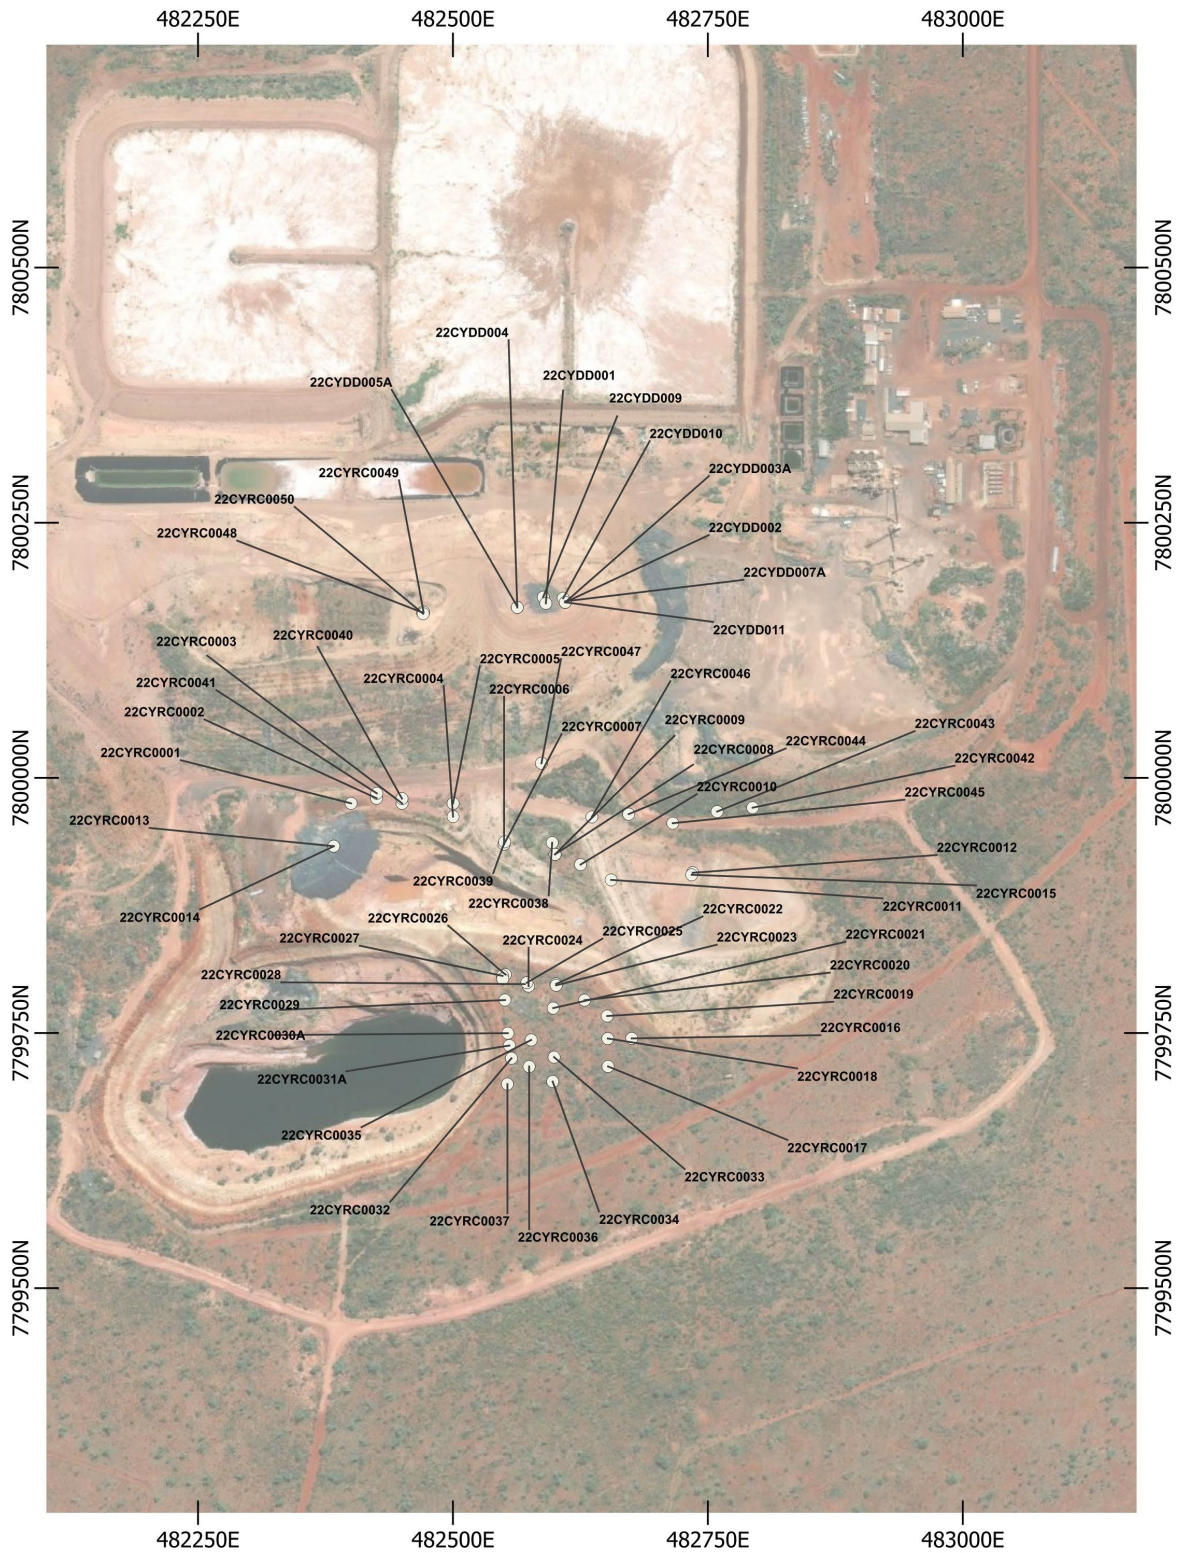


Figure 7: Collar map showing the location of all holes drilled in 2022 by Black Cat at Coyote Central.

High-Grades Continue to Extend Kavanagh

ABOUT BLACK CAT SYNDICATE (ASX: BC8)


Key pillars are in place for Black Cat to become a multi operation gold producer at its three 100% owned operations. The three operations are:

Coyote Gold Operation: Coyote is located in Northern Australia, ~20km on the WA side of the WA/NT border, on the Tanami Highway. There is a well-maintained airstrip on site that is widely used by government and private enterprises. Coyote consists of an open pit and an underground mine, 300,000tpa processing facility, +180 person camp and other related infrastructure. The operation is currently on care and maintenance and has a Resource of 3.0Mt @ 5.1g/t Au for 488koz with numerous high-grade targets in the surrounding area.

Paulsens Gold Operation: Paulsens is located 180km west of Paraburdoo in WA. Paulsens consists of an underground mine, 450,000tpa processing facility, +110 person camp, numerous potential open pits and other related infrastructure. The operation is currently on care and maintenance, has a Resource of 2.7Mt @ 2.5g/t Au for 217koz and significant exploration and growth potential.

Kal East Gold Project: comprises ~800km² of highly prospective ground to the east of the world class mining centre of Kalgoorlie, WA. Kal East contains a Resource of 18.8Mt @ 2.1g/t Au for 1,294koz, including a preliminary JORC 2012 Reserve of 3.7Mt @ 2.0 g/t Au for 243koz.

Black Cat plans to construct a central processing facility near the Majestic Mining Centre, ~50km east of Kalgoorlie. The 800,000tpa processing facility will be a traditional carbon-in-leach gold plant which is ideally suited to Black Cat's Resources as well as to third party free milling ores located around Kalgoorlie.

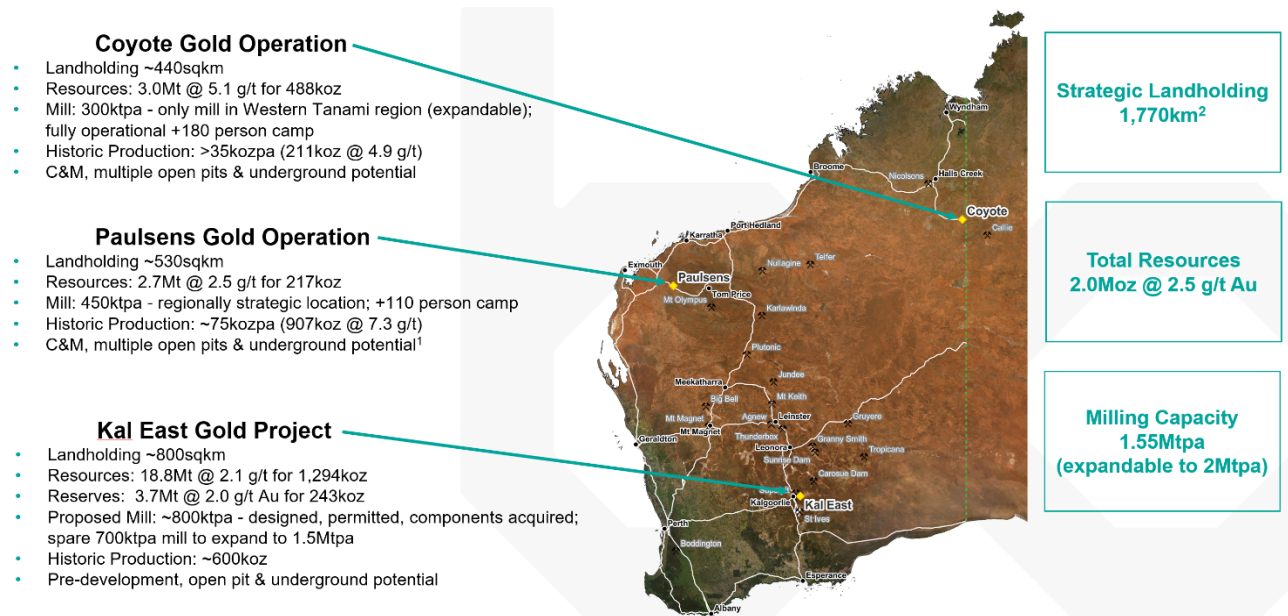

High-Grades Continue to Extend Kavanagh

APPENDIX A - JORC 2012 RESOURCE TABLE - BLACK CAT (100% OWNED)

The current in-situ, drill-defined Resources for Black Cat Syndicate are listed below.

| Mining Centre | Measured Resource | | | Indicated Resource | | | Inferred Resource | | | Total Resource | | |
|--------------------------|-------------------|----------------|------------------|--------------------|----------------|------------------|-------------------|----------------|------------------|----------------|----------------|------------------|
| | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) |
| Kal East | | | | | | | | | | | | |
| Open Pit | 13 | 3.2 | 1 | 8,198 | 1.9 | 493 | 7,572 | 1.6 | 386 | 15,781 | 1.7 | 880 |
| Underground | - | - | - | 1,408 | 4.5 | 204 | 1,647 | 4.0 | 211 | 3,055 | 4.2 | 414 |
| Kal East Resource | 13 | 3.2 | 1 | 9,606 | 2.3 | 697 | 9,219 | 2.0 | 597 | 18,836 | 2.1 | 1,294 |
| Coyote | | | | | | | | | | | | |
| Open Pit | - | - | - | 560 | 2.8 | 51 | 689 | 3.1 | 69 | 1,250 | 3.0 | 120 |
| Underground | - | - | - | 277 | 9.2 | 82 | 1,066 | 7.9 | 271 | 1,344 | 8.1 | 351 |
| Stockpiles | - | - | - | 375 | 1.4 | 17 | - | - | - | 375 | 1.4 | 17 |
| Coyote Resource | - | - | - | 1,212 | 3.8 | 150 | 1,755 | 6.0 | 340 | 2,969 | 5.1 | 488 |
| Paulsens | | | | | | | | | | | | |
| Open Pit | - | - | - | 227 | 2.5 | 18 | 1,940 | 1.7 | 109 | 2,167 | 1.8 | 127 |
| Underground | 341 | 5.8 | 64 | 88 | 5.7 | 16 | 43 | 6.5 | 9 | 473 | 5.9 | 89 |
| Stockpiles | 11 | 2.8 | 1 | - | - | - | - | - | - | 11 | 2.8 | 1 |
| Paulsens Resource | 352 | 5.7 | 65 | 315 | 3.4 | 34 | 1,983 | 1.9 | 118 | 2,651 | 2.5 | 217 |
| TOTAL Resource | 365 | 5.6 | 66 | 11,133 | 2.5 | 881 | 12,957 | 2.5 | 1,055 | 24,456 | 2.5 | 2,000 |

Notes on Resources:

1. The preceding statements of Mineral Resources conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
2. All tonnages reported are dry metric tonnes.
3. Data is rounded to thousands of tonnes and thousands of ounces gold. Discrepancies in totals may occur due to rounding.
4. Resources have been reported as both open pit and underground with varying cut-offs based off several factors discussed in the corresponding Table 1 which can be found with the original ASX announcements for each Resource
5. Resources are reported inclusive of any Reserves

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Resources are:

6. Kal East:
 - o Boundary – Black Cat ASX announcement on 9 October 2020 “Strong Resource Growth Continues including 53% Increase at Fingals Fortune”.
 - o Trump – Black Cat ASX announcement on 9 October 2020 “Strong Resource Growth Continues including 53% Increase at Fingals Fortune”.
 - o Myhree – Black Cat ASX announcement on 9 October 2020 “Strong Resource Growth Continues including 53% Increase at Fingals Fortune”.
 - o Strathfield – Black Cat ASX announcement on 31 March 2020 “Bulong Resource Jumps by 21% to 294,000 oz”.
 - o Majestic – Black Cat ASX announcement on 25 January 2022 “Majestic Resource Growth and Works Approval Granted”;
 - o Sovereign – Black Cat ASX announcement on 11 March 2021 “1 Million Oz in Resource & New Gold Targets”;
 - o Imperial – Black Cat ASX announcement on 11 March 2021 “1 Million Oz in Resource & New Gold Targets”;
 - o Jones Find – Black Cat ASX announcement 04 March 2022 “Resource Growth Continues at Jones Find”
 - o Crown – Black Cat ASX announcement on 02 September 2021 “Maiden Resources Grow Kal East to 1.2Moz”
 - o Fingals Fortune – Black Cat ASX announcement on 23 November 2021 “Upgraded Resource Delivers More Gold at Fingals Fortune”.
 - o Fingals East – Black Cat ASX announcement on 31 May 2021 “Strong Resource Growth Continues at Fingals”.
 - o Trojan – Black Cat ASX announcement on 7 October 2020 “Black Cat Acquisition adds 115,000oz to the Fingals Gold Project”.
 - o Queen Margaret – Black Cat ASX announcement on 18 February 2019 “Robust Maiden Mineral Resource Estimate at Bulong”.
 - o Melbourne United – Black Cat ASX announcement on 18 February 2019 “Robust Maiden Mineral Resource Estimate at Bulong”.
 - o Anomaly 38 – Black Cat ASX announcement on 31 March 2020 “Bulong Resource Jumps by 21% to 294,000 oz”.
 - o Wombola Dam – Black Cat ASX announcement on 28 May 2020 “Significant Increase in Resources - Strategic Transaction with Silver Lake”.
 - o Hammer and Tap – Black Cat ASX announcement on 10 July 2020 “JORC 2004 Resources Converted to JORC 2012 Resources”.
 - o Rowe's Find – Black Cat ASX announcement on 10 July 2020 “JORC 2004 Resources Converted to JORC 2012 Resources”.
7. Coyote Gold Operation
 - o Coyote UG – Black Cat ASX announcement on 19th April 2022 “Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents”
 - o Sandpiper OP&UG – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
 - o Kookaburra OP – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
 - o Pebbles OP – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
 - o Stockpiles SP (Coyote) – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
8. Paulsens Gold Operation:
 - o Paulsens UG – Black Cat ASX announcement on 19th April 2022 Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents
 - o Paulsens SP – Black Cat ASX announcement on 19th April 2022 Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents
 - o Belvedere OP – Black Cat ASX announcement on 19th April 2022 Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents
 - o Mt Clement – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
 - o Merlin – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”
 - o Electric Dingo – Black Cat ASX announcement on 25th May 2022 “Coyote & Paulsens High-Grade JORC Resources Confirmed”

High-Grades Continue to Extend Kavanagh

APPENDIX B - JORC 2012 RESERVE TABLE - BLACK CAT (100% OWNED)

The current in-situ, drill-defined Reserves for the Kal East Gold Project are listed below.

| Mining Centre | Proven Reserve | | | Probable Reserve | | | Total Reserve | | |
|-----------------------------|----------------|----------------|------------------|------------------|----------------|------------------|----------------|----------------|------------------|
| | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) | Tonnes ('000s) | Grade (g/t Au) | Metal ('000s oz) |
| Open Pit Reserves | | | | | | | | | |
| Myhree | - | - | - | 585 | 2.4 | 46 | 585 | 2.4 | 46 |
| Boundary | - | - | - | 120 | 1.5 | 6 | 120 | 1.5 | 6 |
| Jones Find | - | - | - | 350 | 1.5 | 17 | 350 | 1.5 | 17 |
| Fingals Fortune | - | - | - | 2,039 | 1.7 | 113 | 2,039 | 1.7 | 113 |
| Fingals East | - | - | - | 195 | 1.9 | 12 | 195 | 1.9 | 12 |
| Sub Total | - | - | - | 3,288 | 1.8 | 193 | 3,288 | 1.8 | 193 |
| Underground Reserves | | | | | | | | | |
| Majestic | - | - | - | 437 | 3.6 | 50 | 437 | 3.6 | 50 |
| Sub Total | - | - | - | 437 | 3.6 | 50 | 437 | 3.6 | 50 |
| TOTAL Resource | - | - | - | 3,725 | 2.0 | 243 | 3,725 | 2.0 | 243 |

Notes on Reserve:

- Cut-off Grade:
 - Open Pit - The Ore Reserves are based upon an internal cut-off grade greater than or equal to the break-even cut-off grade.
 - Underground - The Ore Reserves are based upon an internal cut-off grade greater than the break-even cut-off grade.
- The commodity price used for the Revenue calculations was AUD \$2,300 per ounce.
- The Ore Reserves are based upon a State Royalty of 2.5% and a refining charge of 0.2%.
- Mineral Resources are reported as inclusive of Ore Reserves.
- Tonnes have been rounded to the nearest 100 t for open pit and 1000 t for underground, grade has been rounded to the nearest 0.1 g/t, ounces have been rounded to the nearest 100 oz. Discrepancies in summations may occur due to rounding.
- This Ore Reserve statement has been compiled in accordance with the guidelines of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The JORC Code – 2012 Edition).

High-Grades Continue to Extend Kavanagh

APPENDIX C - EXPLORATION RESULTS - 2012 JORC TABLE 1

Section 1: Sampling Techniques and Data

| Criteria | JORC Code Explanation | Commentary |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sampling techniques | <i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> | Recent RC and diamond drilling undertaken by Black Cat provides high quality representative samples that are carried out to industry standard and include QAQC standards, blanks and field duplicates. RC sample quality is assessed based on an estimate of recovery as well as recording whether a sample is wet or dry. Diamond samples have recorded drilling recovery and RQD and sampling is conducted based on geologic/mineralisation intervals as per logging. All samples are weighed in the laboratory. |
| | <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> | Black Cat's recent RC drilling is sampled into 1m intervals via a cone splitter on the rig producing a representative sample of approximately 3kg. Samples are selected to weigh less than 3kg to ensure total sample inclusion at the pulverisation stage. Black Cat's diamond core is cut just off the orientation line to preserve the orientation, with the same side always sampled to prevent bias. |
| | <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i> | Reverse circulation drilling is sampled into 1m intervals via a cone splitter on the rig producing a representative sample of approximately 2-3kg. Samples are selected to weigh less than 3kg to ensure total sample inclusion at the pulverisation stage. All samples are crushed, dried and pulverised to a nominal 90% passing 75µm to produce a 40g or 50g sub sample for analysis by FA/AAS. All HQ and NQ2 diamond holes are half core sampled over mineralised intervals to geological contacts. Sample lengths range from 0.2-1.2m, with the same half consistently taken where possible to reduce any human bias in sampling. Core is orientated where possible for structural and geotechnical logging. All holes are surveyed by downhole north-seeking gyro, and collars are picked up by RTK GPS by a chartered survey contractor. |
| Drilling techniques | <i>Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> | RC drilling was completed using a face sampling percussion hammer. The RC bit size was 143mm diameter. All diamond drilling was drilled as mud roller for the barren upper level to around 80m, then by HQ down to around 200m, and then NQ2 to end of hole. It is oriented and logged geotechnically where possible |
| Drill sample recovery | <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> | For all drilling, RC sample recovery is recorded at 1m intervals to assess that the sample is being adequately recovered during recover drilling operations. A subjective visual estimate is used and recorded as a percentage. Sample recovery is generally good, and there is no indication that sampling presents a material risk for the quality of the evaluation of the results. For diamond drilling recovered core for each drill run is recorded and measured against the expected core from that run. Core recovery is consistently very high, with minor loss occurring in regolith and heavily fractured ground. There is no indication that sampling presents a material risk for the quality of the evaluation of the results. |
| | <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> | Sample representativity was checked through the use of duplicates with acceptable results throughout the life of the project. RC sample return is assessed in the field based on recovery within green bags of sample reject, and sample weights are recorded based on laboratory weights. Diamond core is logged for recovery on a metre basis. |
| | <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> | There is no known relationship between sample recovery and grade for drilling completed. |
| Logging | <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> | Logging of RC chips record lithology, mineralogy, texture, mineralisation, weathering, colour, alteration, veining and structure. Diamond core was geologically logged and sampled by for lithology, mineralogy, texture, mineralisation, weathering, colour, alteration, veining and structure. |

High-Grades Continue to Extend Kavanagh

| Section 1: Sampling Techniques and Data | | |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Criteria | JORC Code Explanation | Commentary |
| | | All RC chips and diamond core trays are stored and photographed for future reference. These chip and core trays are archived on site. |
| | <i>The total length and percentage of the relevant intersections logged.</i> | All relevant drilling has been logged in full. |
| Sub-sampling techniques and sample preparation | <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> | All diamond core is sawn half core using a diamond-blade saw, with the same half of the core consistently taken for analysis. The un-sampled half of diamond core is retained for check sampling if required. |
| | <i>If non-core, whether rifled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> | RC sampling is cone split to 1m increments on the rig. The vast majority of sampling has been dry. Where wet samples have been encountered, the hole is conditioned and splitter cleaned to prevent downhole contamination. |
| | <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> | All sample preparation is considered acceptable. It is conducted by a commercial laboratory and involves oven drying, coarse crushing then total grinding to a size of 90% passing 75µm. |
| | <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> | All subsampling activities are carried out by commercial laboratory and are considered to be satisfactory. |
| | <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second half sampling.</i> | For all RC drilling, field duplicate samples are carried out at a rate of 1:50 and are sampled directly from the on-board splitter on the rig. These are submitted for the same assay process as the original samples and the laboratory are unaware of such submissions. |
| | <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> | RC sample sizes of between 2-3kg are considered to be appropriate for the deposit. Diamond samples are half core. |
| Quality of assay data and laboratory tests | <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> | Samples are analysed by an external laboratory using a 40g fire assay with AAS finish. This method is considered suitable for determining gold concentrations in rock and is a total digest method. |
| | <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> | No geophysical tools were used |
| | <i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i> | Drilling adheres to strict QAQC protocols involving weighing of samples, collection of field duplicates and insertion of certified reference material (blanks and standards). QAQC data is checked against reference limits in the SQL database on import. The laboratory performs a number of internal processes including repeats, standards and blanks. Analysis of this data displayed acceptable precision and accuracy. |
| Verification of sampling and assaying | <i>The verification of significant intersections by either independent or alternative company personnel.</i> | Significant intercepts are verified by database, geological and corporate staff. |
| | <i>The use of twinned holes.</i> | No twinning has been completed to date by Black Cat. |
| | <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> | All logging is completed in the field on a table before being uploaded into an SQL database. Assay files are uploaded directly from the lab into the database. The database is managed by a third party. |
| | <i>Discuss any adjustment to assay data.</i> | No adjustments have been made to the assay data. |
| Location of data points | <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> | All drilling is marked out using a handheld GPS prior to drilling. Once complete, the hole collars are picked up by DGPS. Downhole surveys are conducted by the drilling contractor at the end of each hole using a down hole north seeking gyro. |
| | <i>Specification of the grid system used.</i> | All drilling is completed using the grid system GDA 1994 MGA Zone 52. |
| | <i>Quality and adequacy of topographic control.</i> | Topography has been defined by drone survey. |
| Data spacing and distribution | <i>Data spacing for reporting of Exploration Results.</i> | The nominal spacing is 25m by 25m for both the RC and diamond programs. |
| | <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> | Historical drill spacing is considered sufficient to establish geological continuity for the current classification. Infill drilling was designed to have a nominal hole spacing of 20m and exploration drilling is not regularly spaced in the current program. |

High-Grades Continue to Extend Kavanagh

Section 1: Sampling Techniques and Data

| Criteria | JORC Code Explanation | Commentary |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Orientation of data in relation to geological structure | <i>Whether sample compositing has been applied.</i> | Reported RC intervals are based off 1 g/t Au cut-off with a maximum of 1m continuous internal dilution between samples. All tables of results state what the reporting cut-offs are. Reported DD intervals are based off a 1 g/t Au cut-off with a maximum of 1m of continuous internal dilution between mineralisation, and the composited interval being at least 1 gram meter. |
| | <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> | Drilling was orientated to drill approximately perpendicular to interpreted structures and is generally drilled to the south. |
| | <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> | All drilling from surface has been drilled as close to perpendicular to the predicted orientation of stratigraphy as possible. This has reduced the risk of introducing a sampling bias as far as possible. No orientation-based sampling bias has been identified in the data at this point. |
| Sample security | <i>The measures taken to ensure sample security.</i> | All samples are prepared on site by company geological staff. Samples are selected, collected into tied calico bags and transported to the laboratory by commercial transport companies. There are no concerns with sample security |
| Audits or reviews | <i>The results of any audits or reviews of sampling techniques and data.</i> | Black Cat's procedures are regularly reviewed by technical staff. |

Section 2: Reporting of Exploration Results

| Criteria | JORC Code Explanation | Commentary |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mineral tenement and land tenure status | <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as Joint Ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> | The Coyote Gold Mine is located on M80/559 Mining lease M80/559 is held until 2026 and is renewable for a further 21 years on a continuing basis. All production is subject to a Western Australian state government Net Smelter Return ("NSR") royalty of 2.5%. There are no registered Aboriginal Heritage sites or pastoral compensation agreements over the tenements. |
| | <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> | No known impediment to obtaining a licence to operate exists and the remainder of the tenements are in good standing. |
| Exploration done by other parties | <i>Acknowledgment and appraisal of exploration by other parties.</i> | Exploration was first undertaken in the region by Billiton in 1992. Acacia began exploring in 1995 before being purchased by AngloGold Australia in 2000. Exploration initially focused on shallow RAB drilling to test for low level gold and arsenic anomalies. This targeted structural zones of interest, such as fold hinges identified in aeromagnetic surveys By 1998 a large area of anomalous Au-As had been identified just east what is now the current Coyote Resource. An Additional RAB program infilling the area produced a 900m x 700m zone of interest with > 50 ppb Au. Deeper RAB and RC drilling started in 1990 and identified three sub-parallel east-west trending mineralised zones and produced samples containing visible gold. The Coyote corridor underwent extensive exploration by AngloGold between 1993 and 2002. A combined total of 322,846m of Air core, RAB, Diamond and RC drillholes were completed. Tanami Gold NL (TNGL) acquired Coyote in 2003. TNGL's initial drilling aimed at verifying the existing resources and extend its ounce profile. Further holes were later aimed at testing geological models, exploration targets and infilling for open pit resource upgrades. In late 2004 a program of deep underground drilling commenced targeting the Gonzales mineralisation for underground potential. Following a review of the resource in 2005 significant diamond drilling was conducted to infill and upgrade the underground mineral resource and geological models. Drilling continued over 2005 and 2006 before a completed feasibility study was carried out. Open pit mining commenced in 2006 and continued intermittently to 2008 when a portal was developed, and underground mining commenced. Open pit mining briefly commenced again in 2009 before it was again halted. Underground production continued until 2013 when the mine was placed on care and maintenance in June due to lower gold price and production issues. TNGL sold its combined Western Tanami Operation assets, which includes the Coyote deposit to Northern Star Resource (NSR) in late 2017. |

High-Grades Continue to Extend Kavanagh

Section 2: Reporting of Exploration Results

| Criteria | JORC Code Explanation | Commentary | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------|-----------|-------------|-----|---------|-------------|-----------|---------|-----------|-----|-----|-----|--------|-----------|---------|----------|-----|-----|-----|--------|------------|---------|-----------|-----|-----|-----|--------|-----------|---------|-----------|-----|-----|-----|--------|------------|---------|-----------|-----|-----|-----|--------|------------|---------|-----------|-----|-----|-----|--------|------------|---------|-----------|-----|-----|-----|--------|-----------|---------|-----------|-----|-----|-----|--------|-----------|---------|-----------|-----|-----|-----|--------|-----------|---------|-----------|-----|-----|-----|--------|-----------|---------|-----------|-----|-----|-----|--------|
| Geology | <i>Deposit type, geological setting and style of mineralisation.</i> | <p>Northern Star Resources conducted minor exploration activities on the tenements, with no work completed directly on the Coyote deposit.</p> <p>The Coyote Operation is hosted within the Tanami Orogen which comprises a sequence of folded metasediments, mafic volcanics and intrusive rocks unconformably overlying Archaean basement. The known Archaean basement includes the informally named 'Billabong Complex' and the Browns Range Dome. The Tanami Orogen is a significant gold host with other major deposits located across the region including Callie, The Granites, and Groundrush.</p> <p>Lithology</p> <p>The local geology of Coyote is situated within the Killi Killi formation. These are sand rich Proterozoic turbidites comprised of poorly sorted sandstones, siltstones and variable amounts of carbonaceous mudstones. The Killi Killi sequence extends well over 100m in thickness, however the individual beds range from 0.3m to 15m thick. Within the Coyote deposit, the 'Marker Siltstone' and 'Kavanagh Sandstone' are important marker units for mineralisation interpretation and boundaries. The Coyote deposit is obscured by a widespread paleochannel and is deeply weathered. The oxide profile comprises weakly consolidated sand, sheetwash and alluvial lithologies, and clay-dominated sequences. This is overlain by transported red aeolian sand. The deeply weathered profile sits directly over top of the in-situ bedrock with limited saprock present. Oxidised saprolite is commonly present to depths of more than 100m.</p> <p>Structure</p> <p>The entire Killi Killi sequence has been tightly folded into an angular anticline. The Coyote deposit is located east-west Coyote Anticline, a small parasitic fold within the greater anticline, and plunges shallowly west at approximately 15°. The anticline's limbs dip from 30-50° in the northern limb and 70-90° in the southern limb. The southern limb has a secondary fold axis known as the Buggsy anticline, a drag fold associated with the Coyote Fault that offsets the stratigraphy. These limbs contain smaller faults and parasitic fold controlling mineralisation at mine scale. The Marker Siltstone and Kavanagh Sandstone have been the primary units used to delineate the sequence and orientation of the bedding and fold structures.</p> <p>Mineralisation</p> <p>Mineralisation is hosted in narrow high grade quartz veins that are concentrated around the fold hinge areas. The mineralisation presents in the form of quartz veins parallel to bedding, and are often concentrated in areas of local folding. In areas such as Kavanagh these veins can extend completely through the fold hinge zone. These mineralised veins often hosts coarse visible gold.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Drill hole information | <p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar;</i> <i>elevation or Reduced Level ("RL") (elevation above sea level in metres) of the drill hole collar;</i> <i>dip and azimuth of the hole;</i> <i>down hole length and interception depth;</i> <i>hole length; and</i> <i>if the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> | <table border="1"> <thead> <tr> <th>Hole ID</th> <th>MGA Easting</th> <th>MGA North</th> <th>RL</th> <th>Dip</th> <th>Azimuth</th> <th>End of Hole</th> </tr> </thead> <tbody> <tr> <td>22CYDD001</td> <td>428,588</td> <td>7,800,177</td> <td>415</td> <td>-50</td> <td>182</td> <td>464.53</td> </tr> <tr> <td>22CYDD002</td> <td>482,610</td> <td>7800,172</td> <td>413</td> <td>-50</td> <td>176</td> <td>439.30</td> </tr> <tr> <td>22CYDD003a</td> <td>482,610</td> <td>7,800,172</td> <td>413</td> <td>-54</td> <td>172</td> <td>445.20</td> </tr> <tr> <td>22CYDD004</td> <td>482,563</td> <td>7,800,167</td> <td>412</td> <td>-50</td> <td>185</td> <td>468.10</td> </tr> <tr> <td>22CYDD005a</td> <td>482,563</td> <td>7,800,167</td> <td>412</td> <td>-57</td> <td>180</td> <td>472.70</td> </tr> <tr> <td>22CYDD006a</td> <td>482,563</td> <td>7,800,169</td> <td>413</td> <td>-60</td> <td>180</td> <td>172.41</td> </tr> <tr> <td>22CYDD007a</td> <td>482,610</td> <td>7,800,173</td> <td>413</td> <td>-60</td> <td>183</td> <td>528.90</td> </tr> <tr> <td>22CYDD008</td> <td>482,589</td> <td>7,800,175</td> <td>413</td> <td>-60</td> <td>185</td> <td>186.10</td> </tr> <tr> <td>22CYDD009</td> <td>482,591</td> <td>7,800,171</td> <td>412</td> <td>-50</td> <td>180</td> <td>454.60</td> </tr> <tr> <td>22CYDD010</td> <td>482,608</td> <td>7,800,176</td> <td>412</td> <td>-65</td> <td>155</td> <td>588.30</td> </tr> <tr> <td>22CYDD011</td> <td>482,610</td> <td>7,800,174</td> <td>412</td> <td>-57</td> <td>160</td> <td>531.10</td> </tr> </tbody> </table> <p>All hole coordinates are reported in MGA94 Z52. All material assays are reported in the body of the announcement</p> | Hole ID | MGA Easting | MGA North | RL | Dip | Azimuth | End of Hole | 22CYDD001 | 428,588 | 7,800,177 | 415 | -50 | 182 | 464.53 | 22CYDD002 | 482,610 | 7800,172 | 413 | -50 | 176 | 439.30 | 22CYDD003a | 482,610 | 7,800,172 | 413 | -54 | 172 | 445.20 | 22CYDD004 | 482,563 | 7,800,167 | 412 | -50 | 185 | 468.10 | 22CYDD005a | 482,563 | 7,800,167 | 412 | -57 | 180 | 472.70 | 22CYDD006a | 482,563 | 7,800,169 | 413 | -60 | 180 | 172.41 | 22CYDD007a | 482,610 | 7,800,173 | 413 | -60 | 183 | 528.90 | 22CYDD008 | 482,589 | 7,800,175 | 413 | -60 | 185 | 186.10 | 22CYDD009 | 482,591 | 7,800,171 | 412 | -50 | 180 | 454.60 | 22CYDD010 | 482,608 | 7,800,176 | 412 | -65 | 155 | 588.30 | 22CYDD011 | 482,610 | 7,800,174 | 412 | -57 | 160 | 531.10 |
| Hole ID | MGA Easting | MGA North | RL | Dip | Azimuth | End of Hole | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD001 | 428,588 | 7,800,177 | 415 | -50 | 182 | 464.53 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD002 | 482,610 | 7800,172 | 413 | -50 | 176 | 439.30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD003a | 482,610 | 7,800,172 | 413 | -54 | 172 | 445.20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD004 | 482,563 | 7,800,167 | 412 | -50 | 185 | 468.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD005a | 482,563 | 7,800,167 | 412 | -57 | 180 | 472.70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD006a | 482,563 | 7,800,169 | 413 | -60 | 180 | 172.41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD007a | 482,610 | 7,800,173 | 413 | -60 | 183 | 528.90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD008 | 482,589 | 7,800,175 | 413 | -60 | 185 | 186.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD009 | 482,591 | 7,800,171 | 412 | -50 | 180 | 454.60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD010 | 482,608 | 7,800,176 | 412 | -65 | 155 | 588.30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22CYDD011 | 482,610 | 7,800,174 | 412 | -57 | 160 | 531.10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Data aggregation methods | <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high-grades) and cut-off grades are usually Material and should be stated.</i> | All aggregated zones are length weighted. No high-grade cuts have been used. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

High-Grades Continue to Extend Kavanagh

| Section 2: Reporting of Exploration Results | | |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Criteria | JORC Code Explanation | Commentary |
| | <p><i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p> | <p>All intersections are calculated using a 1 g/t Au lower cut-off with maximum waste zones between grades of 1m, except where stated in the body of the report.</p> <p>Not applicable, as no metal equivalent values have been reported.</p> |
| Relationship between mineralisation widths and intercept lengths | <p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p> | All intercepts are reported as downhole depths which is considered close to true width for most intercepts. |
| Diagrams | <p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p> | Appropriate diagrams have been included in the body of the announcement. |
| Balanced reporting | <p><i>Where comprehensive reporting of all Exploration Results are not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p> | All results have been tabulated in this release. |
| Other substantive exploration data | <p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p> | Geophysical surveys including aeromagnetic surveys have been carried out by previous owners to highlight and interpret prospective structures in the project area. |
| Further work | <p><i>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p> | Black Cat is continuing an exploration program which will target extension of mineralisation and regional targets within the Coyote area. |