



High-grades Continue to Elevate Paulsens

Black Cat Syndicate Limited (“**Black Cat**” or “**the Company**”) is pleased to provide an update on underground diamond drilling along the Gabbro Veins at the 100% owned Paulsens Gold Operation (“**Paulsens**”).

HIGHLIGHTS

- Assays from an additional 15 diamond holes targeting the Gabbro Veins and shear-hosted mineralisation continue to demonstrate immediate upside to the high-grade Paulsens Underground Resource of 258koz @ 10.8g/t Au. Significant results include:
 - 2.00m @ 39.90g/t Au** from 18.75m; and
 - 1.03m @ 17.80g/t Au** from 51.12m (22PGRD038)
 - 1.23m @ 14.84g/t Au** from 28.68m; and
 - 1.55m @ 6.14g/t Au** from 60.68m; and
 - 0.86m @ 58.50g/t Au** from 102.14m (22PGRD004)
 - 0.80m @ 32.20g/t Au** from 17.73m; and
 - 0.56m @ 13.90g/t Au** from 58.74m (22PGRD025)
 - 0.79m @ 13.60g/t Au** from 42.40m (22PGRD039)
- The Gabbro Veins are unmined and located adjacent to, and up to 200m from, the existing decline which was installed to access the Main Lode.
- The Gabbro Veins occur in the footwall over a 1km plunge length and can form as swarms over areas up to 4m wide. They represent a potential new, high-priority, start-up mining area.
- Drilling of near mine targets is ongoing, targeting both the Gabbro Veins and shear-hosted veins in the upper areas of the mine. A second underground diamond rig will arrive this week to expedite both near mine Resource growth and discovery drilling.
- Engineering and mining studies are underway to support a potential restart decision in mid-2023.

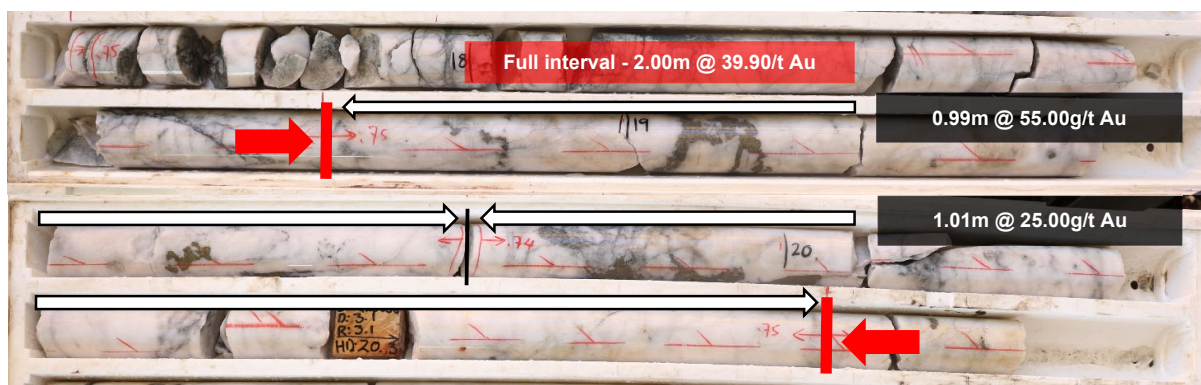


Figure 1: Photo of drillhole 22PGRD038 showing the 2m @ 39.90g/t Au interval and the two sub-sample assay results as reported in the text.

Black Cat’s Managing Director, Gareth Solly, said: “The Gabbro Veins continue to deliver impressive grades often with multiple veins intersected in each hole. A second rig will arrive this week as we ramp up drilling in the lead up to a restart decision. The Gabbro Veins represent a potential new mining front and host one third of the underground Resource which recently increased to 258koz @ 10.8g/t Au, based on results to the end of December 2022. Along with Coyote Central this is one of Australia’s highest grade gold deposits. A further two months of drilling has been completed since then and will continue throughout 2023, focussed on Resource growth and discoveries around existing underground infrastructure. The next Resource update is planned for May 2023.”

High-grades Continue to Elevate Paulsens

SNAPSHOT – PAULSENS GOLD OPERATION

Large Scale Area, 100% Owned by Black Cat

- 530km² of highly prospective ground, 100% owned by Black Cat.
- Existing Resource of 401koz @ 3.3g/t Au.

Background

- Underground mining at Paulsens produced 907koz @ 7.3g/t Au at an average of 75koz pa.
- >1Moz endowment including current Resources: Paulsens Underground 258koz @ 10.8g/t Au; Mt Clement 66koz @ 1.2g/t Au, Belvedere 30koz @ 3.9g/t Au, Electric Dingo 22koz @ 1.3g/t Au and Northern Anticline 24koz @ 1.4g/t Au.
- Previous regional exploration largely involved surface activities with numerous gold and base metal anomalies identified but with only limited follow-up.

Infrastructure in Place, Ready for a Low-Cost Restart

- On care and maintenance since 2018.
- Well maintained, 450ktpa processing facility requiring minimal restart capital.
- +110-person camp.
- Mine and advanced Resources on Mining Licences, minimal barriers to restart.
- Underground mine fully dewatered and ventilated.
- Excellent access with sealed road and gas pipeline within 7km.

Significant Opportunities at All Stages – Multi-metal Potential

- Paulsens has multi-metal potential with numerous base-metal (Cu, Pb and Zn) targets, Australia's third largest antimony deposit at Mt Clement (along with Cu, Pb and Ag Resource) and thermal coal at Kazput.
- Paulsens is an under-explored orogenic gold region with multi-metal potential. There are four main prospect areas – the 15km long Paulsens Structural Corridor ("PSC"), the Northern Anticline, Mt Clement and Electric Dingo (Figure 2).
- The PSC is a complex zone of faults with the main structure through the PSC being the Hardey Fault. All gold mined at the Paulsens underground mine comes from where the Hardey Fault (and related fault splays) cut through the Paulsens Mine Gabbro. Finding similar faulted-off gabbros is a priority given the obvious grade and scale potential.
- Underground drilling in 2023 includes:
 - New mining fronts located close to existing infrastructure being the Gabbro Veins and Apollo with potential for readily accessible ounces; and
 - Paulsens Repeat located 200m from the decline and representing a large-scale, faulted-off gabbro targeting "another Paulsens".

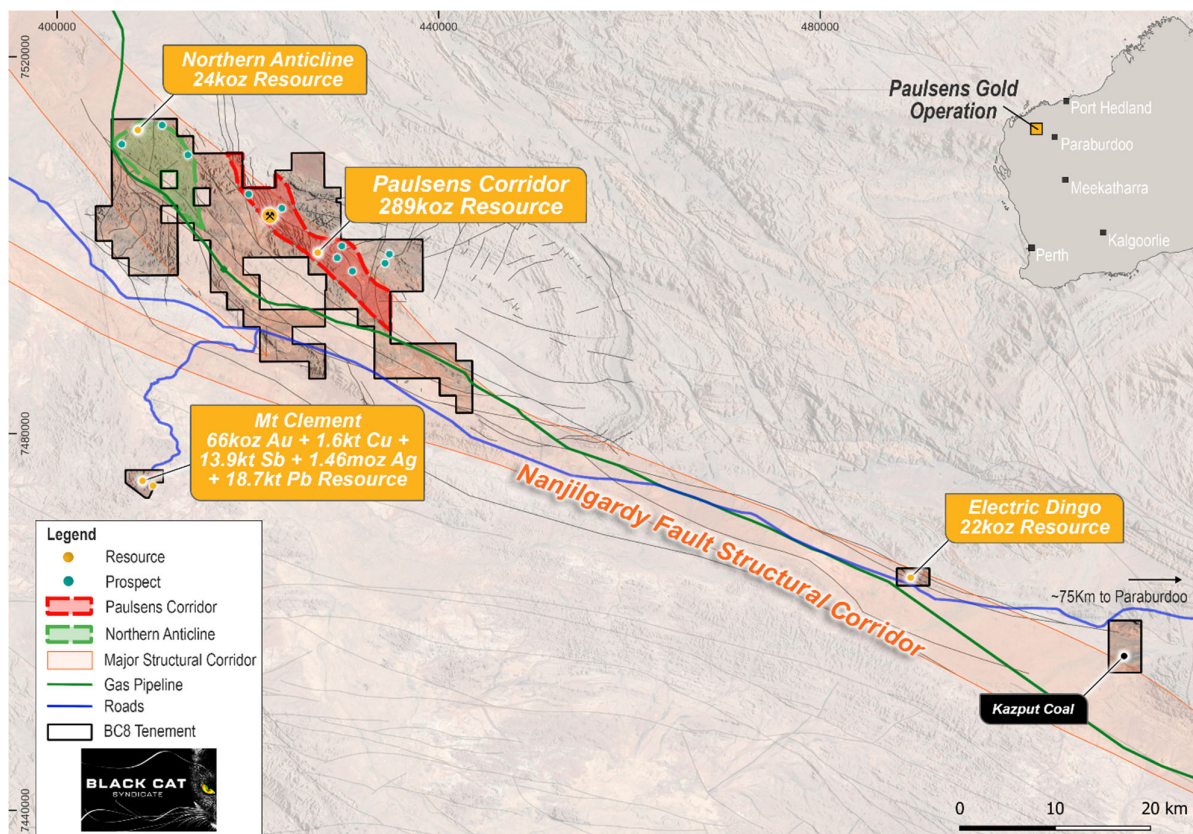


Figure 2: Regional map of the Paulsens Gold Operation showing the location of Resources and large-scale fault architecture.

High-grades Continue to Elevate Paulsens

POTENTIAL NEW MINING FRONT – GABBRO VEINS CLOSE TO EXISTING INFRASTRUCTURE

Drilling at Paulsens commenced on 2 November 2022¹ targeting readily accessible, near-mine growth opportunities, including the Gabbro Veins. The Gabbro Veins are mineralised over a plunge length of +1km and are located adjacent to, and up to 200m from, the existing decline. The Gabbro Veins can form as swarms over areas up to 4m wide.

Most historic mining (907koz @ 7.3g/t Au) occurred within the Main Lode - nominally <3m wide mineralised lodes hosted in a thick Quartz Zone that occurs at the intersection of the Hardey Fault zone and Paulsens Mine Gabbro (Figure 4). The footwall Gabbro Veins present a significant new mining opportunity at Paulsens.

Drilling into the Gabbro Veins and the Main Lode has been encouraging, with 48 drillholes completed to date (assays now returned for 42). All holes have intersected quartz-sulphide (pyrite+/-chalcopyrite+/-galena) veins as predicted by Black Cat's new geology model. Encouraging results from the most recent 15 holes assayed include:

- 0.51m @ 3.12g/t Au from 6.04m; and
0.98m @ 4.78g/t Au from 23.75m; and
1.23m @ 14.85g/t Au from 26.68m; and
1.55m @ 6.14g/t Au from 60.68m; and
0.86m @ 58.50g/t Au from 102.14m (22PGRD004)
- 0.80m @ 32.20g/t Au from 17.73m; and
0.56m @ 13.90g/t Au from 58.74m (22PGRD025)
- 1.21m @ 4.90g/t Au from 76.17m (22PGRD031)
- 1.00m @ 4.30g/t Au from 77.60m; and
1.51m @ 5.10g/t Au from 86.10m (22PGRD033)
- 0.14m @ 7.40g/t Au from 41.55m; and
0.53m @ 6.40g/t Au from 43.55m; and
2.23m @ 4.20g/t Au from 64.90m; and
0.75m @ 4.40g/t Au from 71.86m (22PGRD034)
- 2.00m @ 39.90g/t Au from 18.75m; and
1.03m @ 17.80g/t Au from 51.12m (22PGRD038)
- 0.79m @ 13.60g/t Au from 42.40m; and
0.57m @ 6.10g/t Au from 57.82m (22PGRD039)

These results complement previously reported significant results from the Gabbro Veins, including:²

- 3.42m @ 16.21g/t Au from 69.70m (22PGRD001)
- 0.55m @ 67.20g/t Au from 47.63m; and
0.51m @ 29.86g/t Au from 69.15m (22PGRD002)
- 0.59m @ 30.80g/t Au from 5.14m; and
1.88m @ 21.77g/t Au from 95.87m (22PGRD003)
- 0.88m @ 37.28g/t Au from 52.00m (22PGRD021)
- 0.50m @ 47.20g/t Au from 20.80m; and
2.50m @ 6.55g/t Au from 65.00m (22PGRD011)
- 1.92m @ 9.30g/t Au from 48.00m (22PGRD010)

To date, drilling of the Gabbro Veins has occurred in the lower and mid depths of Paulsens and along a plunge length of ~600m with the mineralisation open both up and down plunge. Infill and growth drilling is ongoing along the Gabbro Veins.

In addition, extensions to mineralisation within the Main Lode and sediment-hosted lodes to the north of the mine (e.g. Apollo) have been drilled. The Main Lode is showing potential for extensions close to existing infrastructure while assays are pending for five holes at Apollo.

All results to date are based on fire assays and a photon assay trial is underway. A similar trial at the Company's Coyote operation illustrated that fire assay results may be under-reporting gold grades for coarse-gold, diamond core samples.

Engineering and mining studies are also underway to support a potential restart decision in mid-2023. The 450ktpa Paulsens processing plant is currently on care and maintenance and remains in good condition.

¹ Refer to ASX Announcements 3 November 2022

² Refer to ASX Announcements 22 December 2022, 13 January 2023 and 6 February 2023

High-grades Continue to Elevate Paulsens

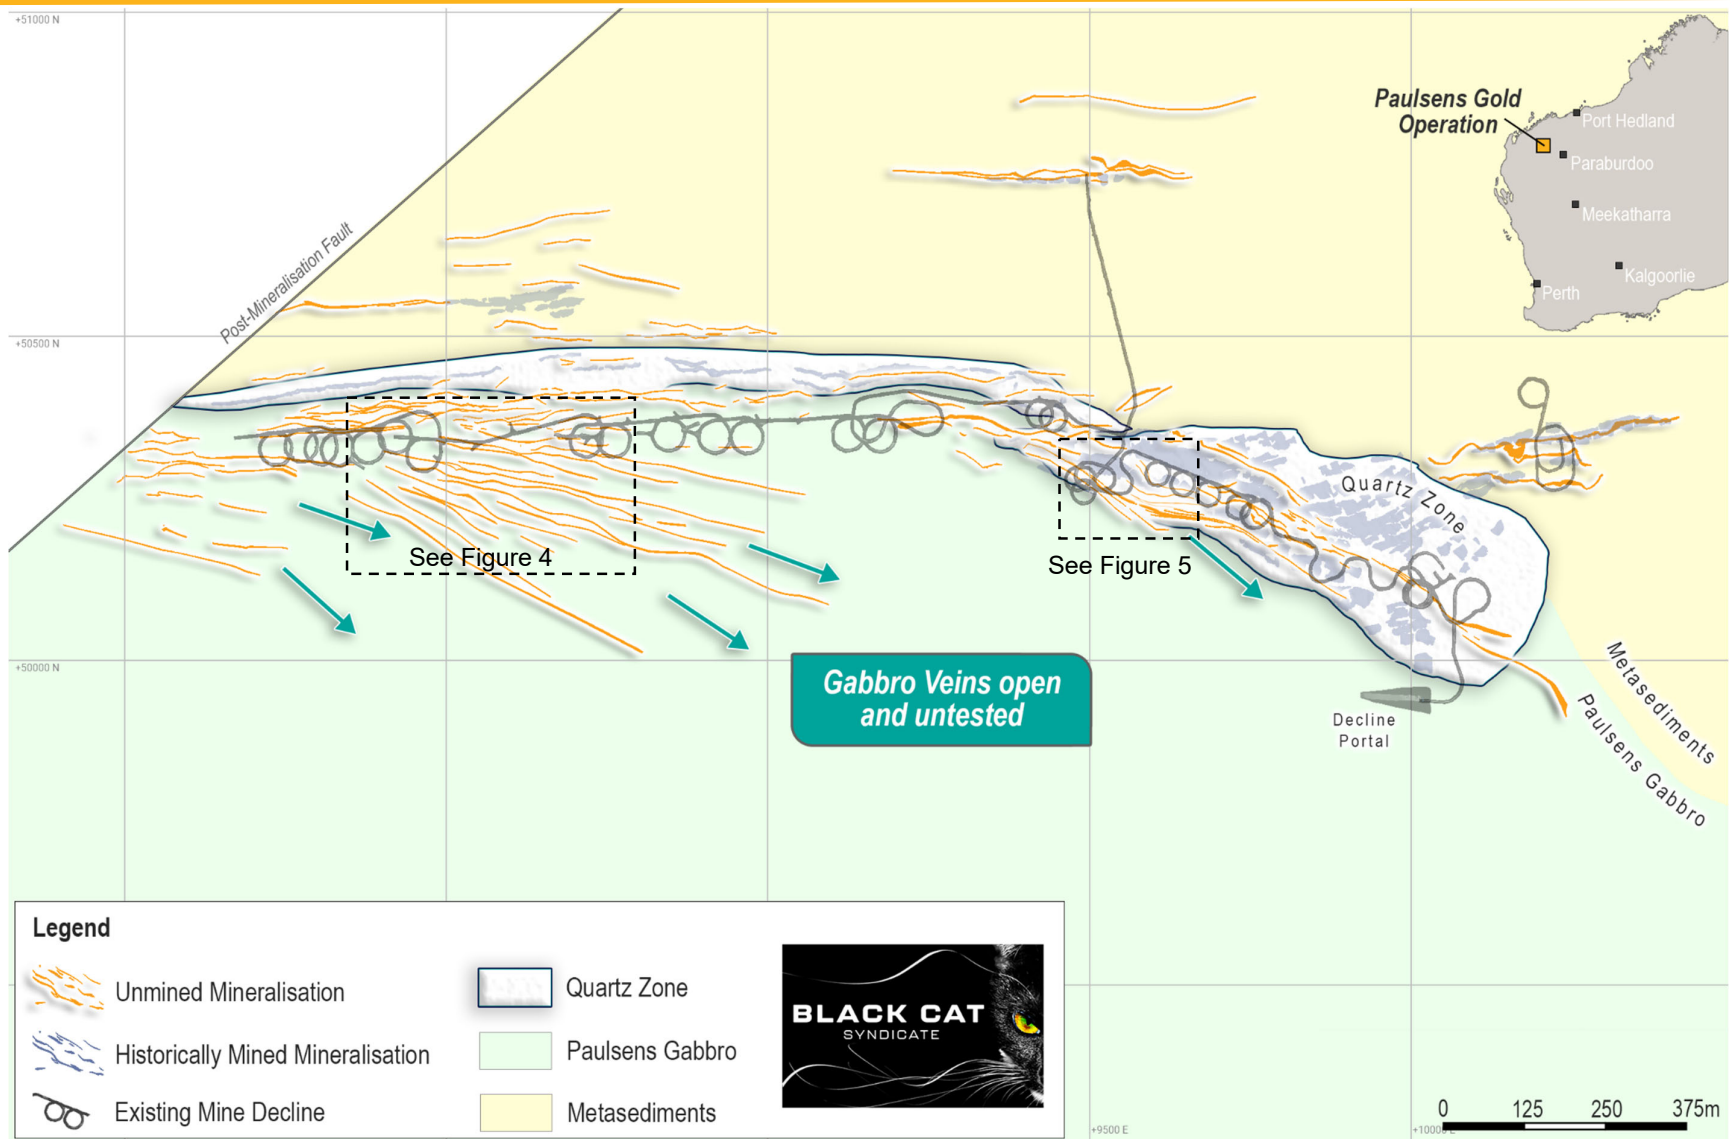


Figure 3: Plan view showing the location of the unmined, high-grade Gabbro Veins, the mined and unmined portions of the Main Zone, which produced ~1000 ounces per vertical metre from narrow lodes within the Quartz Zone. The existing 7km long mine dewatered decline provides easy access to the Gabbro Veins. View is in mine grid.

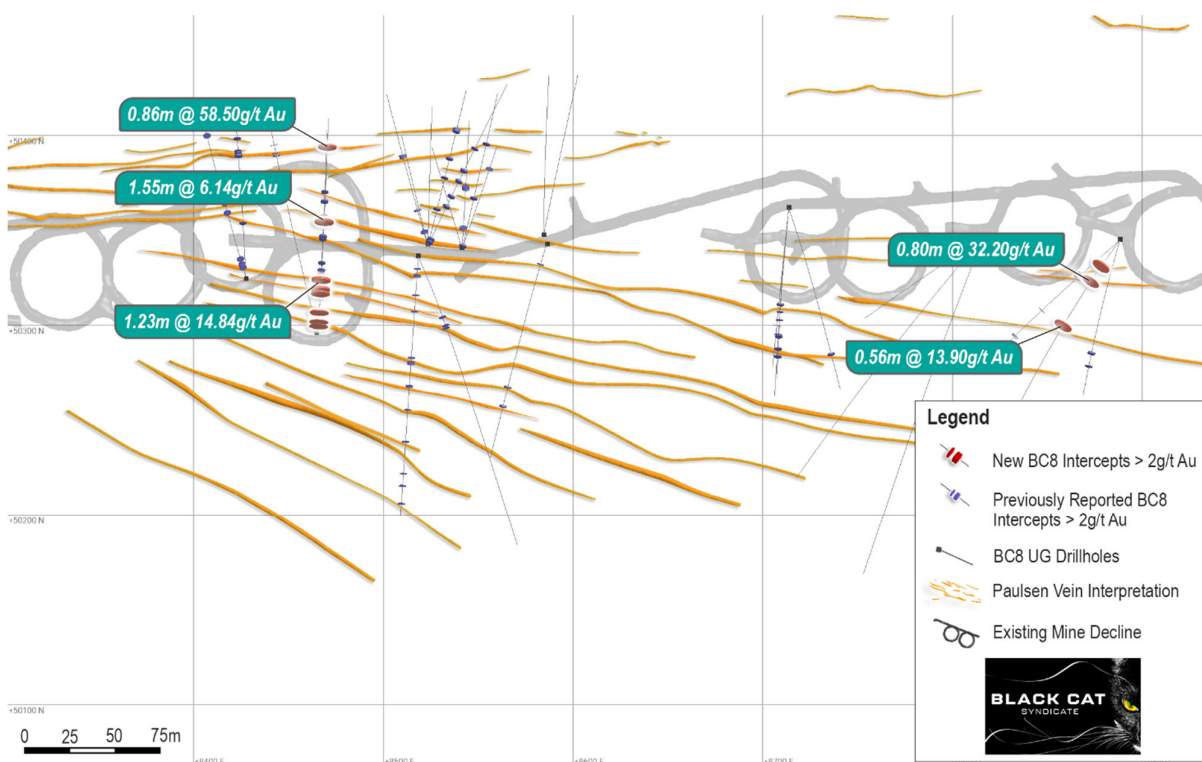


Figure 4: Recent drilling results from the Gabbro Veins in the lower part of the mine (Figure 3) which are readily accessible, as a potential new mining area, from the existing decline (shown in grey).

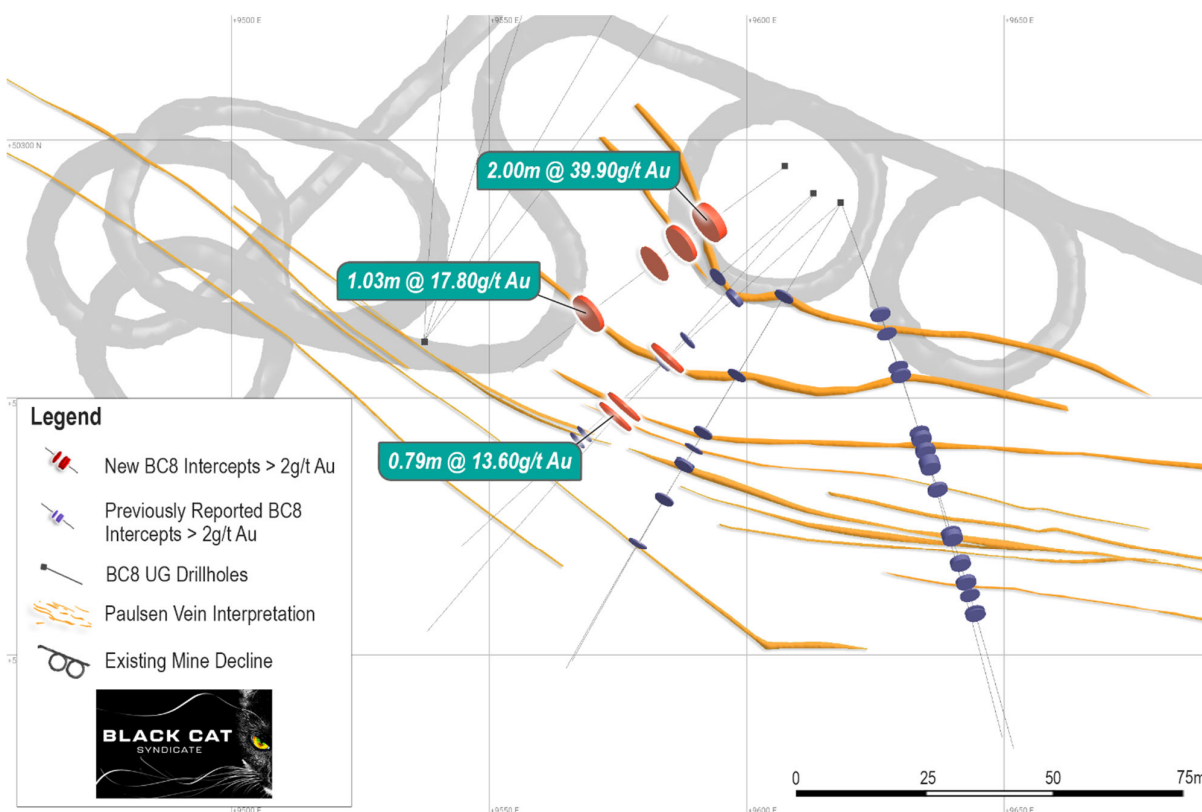


Figure 5: Recent drilling from the Gabbro Veins in the middle part of the mine (Figure 3), which are readily accessible, as a potential new mining area, from the existing decline (shown in grey)

High-grades Continue to Elevate Paulsens

2023 PLANNED ACTIVITIES

Mar 2023:	Paulsens assays: Apollo, Resource extensions along Gabbro Veins
Mar 2023:	Regional Exploration update – Paulsens
Mar 2023:	Financial Statements – 31 Dec 2022
Apr 2023:	Regional exploration program – Coyote
Apr 2023:	Regional exploration program – Paulsens
Apr 2023:	Quarterly Activities Report
May 2023:	Paulsens Resource Update
9-11 May 2023:	RIU Conference - Sydney

For further information, please contact:

Gareth Solly
Managing Director
+61 458 007 713
admin@bc8.com.au

Michael Vaughan
Fivemark Partners
+61 422 602 720
michael.vaughan@fivemark.com.au

This announcement has been approved for release by the Board of Black Cat Syndicate Limited.

High-grades Continue to Elevate Paulsens

Table 1: Drill Hole Locations – Paulsens Gold Operation

Paulsens Underground Diamond Drilling						Downhole			
Hole ID	Local East	Local North	RL Local	Dip	Azimuth Local	From (m)	To (m)	Interval (m)	Au Grade (g/t)
22PGEX001	9138	50194	639	40	356	511.30	512.05	0.75	1.20
22PGEX002	9138	50194	639	52	356	470.72	471.04	0.32	1.01
22PGEX003	9138	50194	639	64	356	Ni Significant Results			
22PGRD001	8428	50325	279	25	357	8.94	9.58	0.64	1.87
						31.28	31.47	0.19	2.69
						34.77	34.89	0.12	1.18
						56.07	57.65	1.58	2.75
						69.70	73.12	3.42	16.21
						79.98	80.38	0.40	6.88
22PGRD002	8428	50325	279	43	344	4.04	4.58	0.54	1.28
						7.44	7.95	0.51	3.02
						10.05	11.67	1.62	1.83
						13.66	14.09	0.43	5.27
						47.63	48.18	0.55	67.20
						54.42	54.75	0.33	21.70
22PGRD003	8466	50295	319	0	345	55.81	56.15	0.34	1.23
						66.77	67.43	0.66	3.90
						69.15	69.66	0.51	29.86
						75.48	76.13	0.65	2.46
						103.73	104.12	0.39	10.20
						1.09	4.48	3.39	3.21
22PGRD004	8466	50295	318	16	003	5.14	5.73	0.59	30.80
						8.42	9.59	1.17	1.55
						11.29	13.66	2.37	6.74
						95.87	97.75	1.88	21.77
						99.85	100.05	0.20	1.90
						101.77	101.96	0.19	9.68
22PGRD005	8466	50295	317	29	003	115.65	115.92	0.27	1.08
						3.67	3.92	0.25	2.60
						6.04	6.55	0.51	3.12
						10.80	11.65	0.85	1.84
						13.78	14.46	0.68	1.23
						21.34	22.28	0.94	2.84
22PGRD006	8466	50295	317	29	003	23.75	24.73	0.98	4.78
						26.68	29.91	1.23	14.85
						35.21	35.57	0.36	1.79
						60.68	62.23	1.55	6.14
						99.30	99.88	0.58	1.26
						102.14	103.00	0.86	58.50
22PGRD007	8466	50295	317	29	003	2.50	2.84	0.34	5.34
						7.06	7.62	0.56	1.01
						11.85	14.64	2.79	4.83
						20.85	21.00	0.15	3.59
						22.61	22.82	0.21	3.51
						35.30	35.80	0.50	11.10
22PGRD008	8466	50295	317	29	003	37.80	38.42	0.62	2.10
						42.26	42.71	0.45	9.31
						46.65	47.75	1.10	1.34
						55.37	55.48	0.11	1.15
						56.60	56.74	0.14	2.54
						57.78	59.00	1.22	4.32
22PGRD009	8466	50295	317	29	003	70.11	71.08	0.97	1.86

High-grades Continue to Elevate Paulsens

						76.36	76.58	0.22	1.76
						79.21	80.00	0.79	4.46
						85.10	85.56	0.46	2.38
						6.59	6.78	0.16	11.90
						7.98	8.43	0.45	1.49
						10.16	11.08	0.92	11.10
						20.94	21.17	0.23	2.17
						23.52	23.62	0.1	1.45
						29.85	30	0.15	16.90
						35	35.2	0.2	1.32
						50.02	50.17	0.15	1.16
						54.82	55.19	0.37	8.81
						57.12	58.54	1.42	1.61
22PGRD006	8519	50341	342	13	184	61.19	61.4	0.21	1.29
						61.78	62.18	0.4	1.03
						69.04	70.96	1.92	5.19
						83.04	83.27	0.23	9.83
						85.81	86.17	0.36	1.53
						93.14	93.41	0.27	1.84
						96.03	96.63	0.6	1.44
						100.12	100.61	0.49	5.93
						124.06	124.54	0.48	3.05
						126.7	127.1	0.4	1.06
						133.75	134.1	0.35	5.42
						41.25	41.55	0.3	1.11
22PGRD007	8519	50341	342	22	198	42	42.13	0.13	3.13
						43.4	43.65	0.25	8.85
						3.75	4.75	1	1.29
22PGRD008	8519	50341	342	-26	028	7.75	8.75	1	3.59
						1.41	2.47	1.06	1.85
						4.58	5.13	0.55	1.33
						10.07	10.45	0.38	1.45
						19.07	20.00	0.93	2.92
22PGRD010	8519	50341	342	4	025	48.00	49.92	1.92	9.30
						62.92	63.32	0.40	1.21
						1.16	1.8	0.64	1.79
						20.8	21.3	0.5	47.2
						38.9	39.2	0.3	20.4
22PGRD011	8519	50341	342	19	055	46	46.4	0.4	1.67
						49.8	50.6	0.8	5.38
						65	67.5	2.5	6.546
						2	4.64	2.64	2.34
						9.04	9.91	0.87	1.29
						24	25	1	2.77
						30.41	31.3	0.89	5.21
22PGRD012 ³	8519	50341	342	20	067	39.97	41	1.03	12.50
						46.57	47.57	1	13.60
						57.84	58.85	1.01	1.09
						60.82	61.27	0.45	9.62
						4.96	5.97	1.01	1.10
						7.88	8.45	0.57	1.76
22PGRD013	8519	50341	342	-29	024	9.95	10.66	0.71	1.62
						41.18	41.74	0.56	1.93
						12.06	13.17	1.11	8.75
22PGRD014	8519	50341	342	-29	045	30.8	31.58	0.78	1.27

High-grades Continue to Elevate Paulsens

						35.73	37.67	1.94	4.22
22PGRD015	8519	50341	342	-27	061	13.4	13.92	0.52	1.39
						49.18	49.65	0.47	3.22
						1.06	2.15	1.09	3.97
22PGRD016	8519	50341	342	22	055	24.35	25.24	0.89	1.57
						29.12	29.79	0.67	12.50
						60.98	61.42	0.44	18.10
22PGRD017	8585	50347	350	15	054	24.4	25.4	1	3.22
22PGRD018	8585	50347	350	20	043	27.43	28.19	0.76	1.61
						10.30	10.59	0.29	4.89
22PGRD019	8585	50347	350	-8	237	54.20	54.96	0.76	1.58
						77.44	78.42	0.98	2.85
						87.95	89.05	1.10	4.77
						25.41	26.18	0.77	1.81
22PGRD020	8714	50361	399	30	186	76.88	77.34	0.46	7.54
						84.30	84.60	0.30	2.73
						88.73	89.17	0.44	4.03
						52.00	52.88	0.88	37.28
22PGRD021	8714	50361	399	15	186	56.41	56.51	0.10	2.15
						60.79	60.89	0.10	25.50
						68.58	68.89	0.31	5.40
						72.91	73.19	0.28	1.02
22PGRD022	8714	50361	399	14	161	81.85	82.72	0.87	2.24
						59.85	60.36	0.51	1.38
22PGRD023	8714	50361	397	-2	186	61.67	61.87	0.2	3.76
						76.55	77.16	0.61	1.38
22PGRD024	8889	50344	496	15	196	36.11	37.25	1.10	1.14
						63.00	65.00	2.00	1.90
						69.51	71.00	1.49	2.20
						17.73	18.53	0.80	32.20
22PGRD025	8889	50344	496	23	216	28.78	29.02	0.24	5.10
						30.88	31.24	0.36	1.20
						58.74	59.30	0.56	13.90
						18.00	19.00	1.00	4.04
						26.80	27.26	0.46	2.71
22PGRD026	8889	50344	496	2	229	29.71	30.54	0.83	2.31
						55.00	55.36	0.36	2.10
						70.19	70.94	0.75	1.06
						74.42	75.35	0.93	6.47
						87.87	88.09	0.22	10.70
22PGRD027	9029	50374	544	10	346	No Significant Results			
22PGRD028	9077	50409	549	44	344	13.94	14.92	0.98	1.79
						28.64	29.10	0.46	3.24
22PGRD029	9077	50409	547	13	346	No Significant Results			
22PGRD030	9538	50261	858	6	39	82.78	83.71	0.93	2.50
						76.17	77.38	1.21	4.90
22PGRD031	9538	50261	858	7	30	85.00	86.51	1.51	1.50
22PGRD032	9538	50261	858	6	16	71.10	72.50	1.40	3.20
						77.60	78.60	1.00	4.30
22PGRD033	9537	50261	858	5	3	80.59	80.96	0.37	1.30
						86.10	87.61	1.51	5.10
						27.99	28.58	0.59	2.70
22PGRD034	9613	50290	923	31	155	33.10	34.01	0.91	1.00
						41.55	41.69	0.14	7.40
						43.55	43.98	0.53	6.40

High-grades Continue to Elevate Paulsens

						57.79	57.93	0.14	2.20
						59.00	60.00	1.00	2.30
						62.00	63.77	1.77	1.90
						64.90	67.13	2.23	4.20
						71.86	72.61	0.75	4.40
						81.73	84.85	3.12	2.20
						88.00	88.25	0.25	1.90
						90.17	92.88	2.71	1.60
						95.10	96.00	0.90	2.20
						98.65	98.88	0.23	3.50
						101.57	103.81	2.24	1.20
						104.95	105.39	0.43	1.60
22PGRD035	9613	50289	921	15	156	No Significant Results			
22PGRD036	9613	50290	923	29	207	28.64	28.76	0.12	5.20
						31.06	32.04	0.98	1.20
						34.68	34.90	0.22	1.90
22PGRD037	9613	50290	923	11	204	56.85	57.47	0.62	2.70
						59.71	60.16	0.45	1.70
						78.75	79.11	0.36	2.00
						18.75	20.75	2.00	39.90
						26.65	27.64	0.99	3.30
22PGRD038	9607	50295	924	23	221	32.61	32.96	0.35	1.40
						34.15	34.30	0.15	5.90
						47.28	47.92	0.64	1.20
						51.12	52.15	1.03	17.80
						33.50	33.68	0.18	1.30
22PGRD039	9613	50289	921	-6.5	225	42.40	43.19	0.79	13.60
						55.24	55.83	0.59	2.60
						57.82	58.39	0.57	6.10
22PGRD040	9852	50177	1020	29	347	Assays Pending			
22PGRD041	9852	50177	1020	28	356	Assays Pending			
22PGRD042	9852	50177	1020	25	45	Assays Pending			
22PGRD043	10025	50120	1070	11	63	Assays Pending			
22PGRD044	10025	50120	1070	13	13	Assays Pending			
22PGRD045	10025	50120	1070	13	5	Assays Pending			
22PGRD046	9618	50287	922	-26	212	Assays Pending			
22PGRD047	9618	50287	922	-14	230	Assays Pending			

Notes:

All significant intercepts are reported at 1 g/t Au cut with a maximum of 1m continuous internal dilution

Positive Dip points down

Greyed results previously reported - Refer to ASX announcements 22 December 2022, 13 January 2023¹, 6 February 2023, 9 February 2023.

ABOUT BLACK CAT SYNDICATE (ASX: BC8)


Key pillars are in place for Black Cat to become a multi operation gold producer at its three 100% owned operations. The three operations are:

Coyote Gold Operation: Coyote is located in Northern Australia, ~20km on the WA side of the WA/NT border, on the Tanami Highway. There is a well-maintained airstrip on site that is widely used by government and private enterprises. Coyote consists of an open pit and an underground mine, 300,000tpa processing facility, +180 person camp and other related infrastructure. The operation is currently on care and maintenance and has a Resource of 3.7Mt @ 5.5g/t Au for 645koz with numerous high-grade targets in the surrounding area.

Paulsens Gold Operation: Paulsens is located 180km west of Paraburdoo in WA. Paulsens consists of an underground mine, 450,000tpa processing facility, +110 person camp, numerous potential open pits and other related infrastructure. The operation is currently on care and maintenance, has a Resource of 3.7Mt @ 3.3g/t Au for 401koz and significant exploration and growth potential.

Kal East Gold Project: comprises ~800km² of highly prospective ground to the east of the world class mining centre of Kalgoorlie, WA. Kal East contains a Resource of 18.8Mt @ 2.1g/t Au for 1,294koz, including a preliminary JORC 2012 Reserve of 3.7Mt @ 2.0 g/t Au for 243koz.

Black Cat plans to construct a central processing facility near the Majestic Mining Centre, ~50km east of Kalgoorlie. The 800,000tpa processing facility will be a traditional carbon-in-leach gold plant which is ideally suited to Black Cat's Resources as well as to third party free milling ores located around Kalgoorlie.

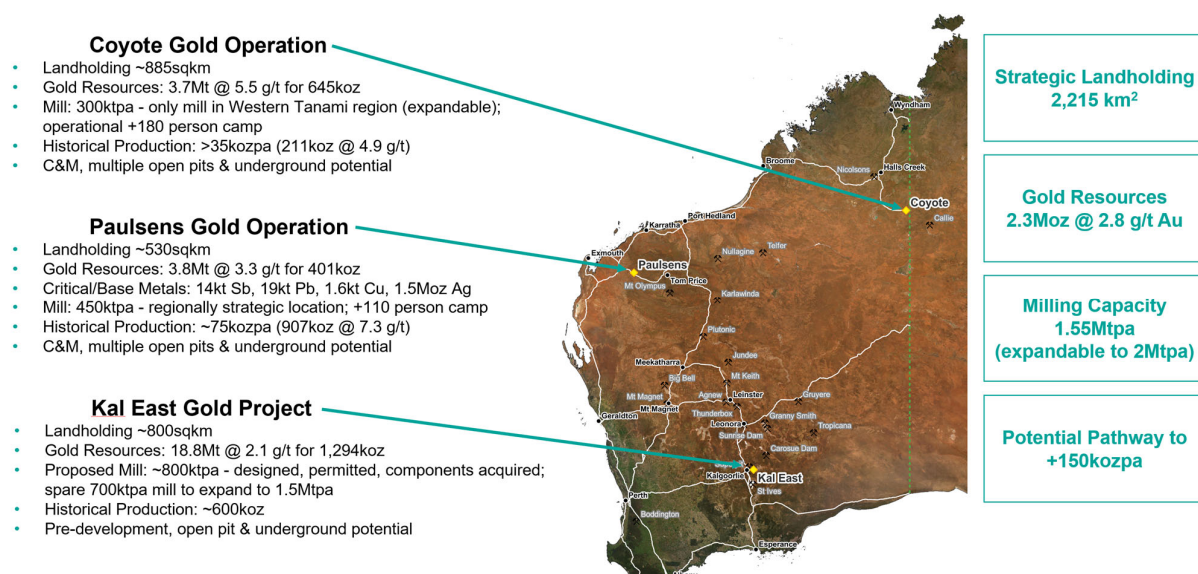

COMPETENT PERSON'S STATEMENT

The information in this announcement that relates to geology, and planning was compiled by Dr. Wesley Groome, who is a Member of the AIG and an employee, shareholder and option holder of the Company. Dr. Groome has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Dr. Groome consents to the inclusion in the report of the matters based on the information in the form and context in which it appears.

The Company confirms that it is not aware of any new information or data that materially affects the information in the original reports, and that the form and context in which the Competent Person's findings are presented have not been materially modified from the original reports.

Where the Company refers to the exploration results, Mineral Resources, and Reserves in this report (referencing previous releases made to the ASX), it confirms that it is not aware of any new information or data that materially affects the information included in that announcement and all material assumptions and technical parameters underpinning the Mineral Resource and Reserve estimates with that announcement continue to apply and have not materially changed.

APPENDIX A - JORC 2012 GOLD RESOURCE TABLE - BLACK CAT (100% OWNED)

Mining Centre	Measured Resource			Indicated Resource			Inferred Resource			Total Resource		
	Tonnes ('000)	Grade (g/t Au)	Metal ('000 oz)	Tonnes ('000)	Grade (g/t Au)	Metal ('000 oz)	Tonnes ('000)	Grade (g/t Au)	Metal ('000 oz)	Tonnes ('000)	Grade (g/t Au)	Metal ('000 oz)
Kal East												
Myhree Mining Centre	-	-	-	1,194	3.0	117	1,686	2.6	143	2,880	2.8	259
Majestic Mining Centre	-	-	-	3,935	2.3	290	4,478	1.7	239	8,413	2.0	528
Fingals Mining Centre	-	-	-	2,920	2.1	194	1,046	2.4	81	3,966	2.2	275
Trojan Mining Centre	-	-	-	1,356	1.8	79	760	1.5	36	2,115	1.7	115
Other Resources	13	3.2	1	200	2.6	17	1,248	2.5	99	1,461	2.5	117
Kal East Resource	13	3.2	1	9,606	2.3	697	9,219	2.0	597	18,836	2.1	1,294
Coyote												
Coyote Central	-	-	-	849	8.7	236	643	9.1	188	1,492	8.8	424
Sandpiper	-	-	-	253	3.3	27	773	4.9	121	1,027	4.5	147
Kookaburra	-	-	-	341	2.5	27	353	2.1	24	694	2.3	51
Pebbles	-	-	-	-	-	-	76	2.5	6	76	2.5	6
Stockpiles	-	-	-	375	1.4	17	-	-	-	375	1.4	17
Coyote Resource	-	-	-	968	2.3	71	1,202	3.9	151	3,664	5.5	645
Paulsens												
Paulsens	93	8.0	24	316	11.9	121	345	10.3	114	753	10.7	259
Mt Clement	-	-	-	-	-	-	1,741	1.2	66	1,741	1.2	66
Belvedere	-	-	-	129	3.1	13	111	4.8	17	240	3.9	30
Northern Anticline	-	-	-	-	-	-	523	1.4	24	523	1.4	24
Electric Dingo	-	-	-	98	1.6	5	444	1.2	17	542	1.3	22
Paulsens Resource	93	8.0	24	543	8.0	139	3,164	2.9	299	3,799	3.3	401
TOTAL Resource	106	7.3	25	11,967	3.0	1,143	14,228	2.7	1,235	26,299	2.8	2,340

Notes on Resources:

- The preceding statements of Mineral Resources conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- All tonnages reported are dry metric tonnes.
- Data is rounded to thousands of tonnes and thousands of ounces gold. Discrepancies in totals may occur due to rounding.
- Resources have been reported as both open pit and underground with varying cut-offs based off several factors discussed in the corresponding Table 1 which can be found with the original ASX announcements for each Resource
- Resources are reported inclusive of any Reserves
- Paulsens Inferred Resource includes Mt Clement Eastern Zone Au of 7koz @ 0.3g/t Au accounting for lower grades reported

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Resources are:

- Kal East:
 - Boundary – Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune"
 - Trump – Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune"
 - Myhree – Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune"
 - Strathfield – Black Cat ASX announcement on 31 March 2020 "Bulong Resource Jumps by 21% to 294,000 oz"
 - Majestic – Black Cat ASX announcement on 25 January 2022 "Majestic Resource Growth and Works Approval Granted"
 - Sovereign – Black Cat ASX announcement on 11 March 2021 "1 Million Oz in Resource & New Gold Targets"
 - Imperial – Black Cat ASX announcement on 11 March 2021 "1 Million Oz in Resource & New Gold Targets"
 - Jones Find – Black Cat ASX announcement 04 March 2022 "Resource Growth Continues at Jones Find"
 - Crown – Black Cat ASX announcement on 02 September 2021 "Maiden Resources Grow Kal East to 1.2Moz"
 - Fingals Fortune – Black Cat ASX announcement on 23 November 2021 "Upgraded Resource Delivers More Gold at Fingals Fortune"
 - Fingals East – Black Cat ASX announcement on 31 May 2021 "Strong Resource Growth Continues at Fingals"
 - Trojan – Black Cat ASX announcement on 7 October 2020 "Black Cat Acquisition adds 115,000oz to the Fingals Gold Project"
 - Queen Margaret – Black Cat ASX announcement on 18 February 2019 "Robust Maiden Mineral Resource Estimate at Bulong"
 - Melbourne United – Black Cat ASX announcement on 18 February 2019 "Robust Maiden Mineral Resource Estimate at Bulong"
 - Anomaly 38 – Black Cat ASX announcement on 31 March 2020 "Bulong Resource Jumps by 21% to 294,000 oz"
 - Wombola Dam – Black Cat ASX announcement on 28 May 2020 "Significant Increase in Resources - Strategic Transaction with Silver Lake"
 - Hammer and Tap – Black Cat ASX announcement on 10 July 2020 "JORC 2004 Resources Converted to JORC 2012 Resources"
 - Rowe's Find – Black Cat ASX announcement on 10 July 2020 "JORC 2004 Resources Converted to JORC 2012 Resources"
- Coyote Gold Operation
 - Coyote OP&UG – Black Cat ASX announcement on 16th January 2022 "Coyote Underground Resource increases to 356koz @ 14.6g/t Au – One of the highest-grade deposits in Australia"
 - Sandpiper OP&UG – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
 - Kookaburra OP – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
 - Pebbles OP – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
 - Stockpiles SP (Coyote) – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
- Paulsens Gold Operation:
 - Paulsens UG – Black Cat ASX announcement on 13th February 2023 "Paulsens Underground Resource increases to 258koz @ 10.8g/t Au - Black Cat now owns two of the highest-grade deposits in Australia"
 - Paulsens SP – Black Cat ASX announcement on 19th April 2022 "Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents"
 - Belvedere OP – Black Cat ASX announcement on 19th April 2022 "Funded Acquisition of Coyote & Paulsens Gold Operations - Supporting Documents"
 - Mt Clement – Black Cat ASX announcement on 24th November 2022 "High-Grade Au-Cu-Sb-Ag-Pb Resource at Paulsens"
 - Merlin – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
 - Electric Dingo – Black Cat ASX announcement on 25th May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"

High-grades Continue to Elevate Paulsens

APPENDIX B - JORC 2012 POLYMETALLIC RESOURCES - BLACK CAT (100% OWNED)

The current in-situ, drill-defined polymetallic Resources for Black Cat Syndicate are listed below.

Deposit	Resource Category	Tonnes ('000 t)	Grade					Contained Metal				
			Au (g/t)	Cu (%)	Sb (%)	Ag (g/t)	Pb (%)	Au (koz)	Cu (kt)	Sb (kt)	Ag (koz)	Pb (kt)
Western	Inferred	415	-	0.4	0.2	76.9	-	*	1.6	0.7	1,026	-
	Total	415	-	0.4	0.2	76.9	-	*	1.6	0.7	1,026	-
Central	Inferred	532	-	-	-	-	-	*	-	-	-	-
	Total	532	-	-	-	-	-	*	-	-	-	-
Eastern	Inferred	794	-	-	1.7	17.0	2.4	*	-	13.2	434	18.7
	Total	794	-	-	1.7	17.0	2.4	*	-	13.2	434	18.7
Total		1,741	-	-	-	-	-	*	1.6	13.9	1,460	18.7

Notes on Resources:

- The preceding statements of Mineral Resources conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- All tonnages reported are dry metric tonnes.
- Data is rounded to thousands of tonnes and thousands of ounces/tonnes for copper, antimony, silver, and lead. Discrepancies in totals may occur due to rounding.
- Resources have been reported as both open pit and underground with varying cut-offs based off several factors discussed in the corresponding Table 1 which can be found with the original ASX announcements for each Resource
- Resources are reported inclusive of any Reserves
- Gold is reported in the previous table for Mt Clement, and so is not reported here. A total of 66koz of gold is contained within the Mt Clement Resource

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Resources are:

- Paulsens Gold Operation:
 - Mt Clement – Black Cat ASX announcement on 24th November 2022 "High-Grade Au-Cu-Sb-Ag-Pb Resource at Paulsens"

APPENDIX C - JORC 2012 GOLD RESERVE TABLE - BLACK CAT (100% OWNED)

The current in-situ, drill-defined Reserves for the Kal East Gold Project are listed below.

	Proven Reserve			Probable Reserve			Total Reserve		
	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)
Open Pit Reserves	-	-	-	3,288	1.8	193	3,288	1.8	193
Underground Reserves	-	-	-	437	3.6	50	437	3.6	50
TOTAL Resource	-	-	-	3,725	2.0	243	3,725	2.0	243

Notes on Reserve:

- The preceding statements of Mineral Reserves conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- All tonnages reported are dry metric tonnes.
- Data is rounded to thousands of tonnes and thousands of ounces gold. Discrepancies in totals may occur due to rounding.
- Cut-off Grade:
 - Open Pit - The Ore Reserves are based upon an internal cut-off grade greater than or equal to the break-even cut-off grade.
 - Underground - The Ore Reserves are based upon an internal cut-off grade greater than the break-even cut-off grade.
- The commodity price used for the Revenue calculations was AUD \$2,300 per ounce.
- The Ore Reserves are based upon a State Royalty of 2.5% and a refining charge of 0.2%.

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Reserves are:

- Kal East:
 - Black Cat ASX announcement on 03 June 2022 "Robust Base Case Production Plan of 302koz for Kal East"

High-grades Continue to Elevate Paulsens

APPENDIX D – PAULSENS DRILLING UNDERGROUND- JORC TABLE 1

Section 1: Sampling Techniques and Data		
Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Diamond core is sampled based on geological logging of mineralised intervals. Samples range in width from 0.10m to 1.20m. Adequate buffers of surrounding non-mineralised rock are sampled around primary samples of between 1 and 5m depending on the nature of the interval to characterise the mineralised boundaries as "hard" or "soft". Samples are collected on half NQ2 core with cutting off the orientation line (where available) and half core routinely selected to sample the same side of the cut line to avoid bias. Historically, core samples were collected from whole core for resource definition holes and half-core, similar to what is outlined above, for exploration holes.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Core is aligned and measured by tape, comparing back to down hole core blocks consistent with industry practice. For the current drill program, downhole orientation of the core is done via True Core and hole orientation is measured downhole using a Devi Gyro.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	Diamond core is sampled on intervals ranging from 0.10 to 1.20m depending on the nature of the logged interval. Core is half-cut along a cut line just off the orientation line (where available) and core from the same side of the cut line is submitted for assay to avoid human bias of sample selection. Samples are crushed and pulverised at a commercial lab to produce an ~200g pulp sub sample to use in the assay process. Samples are analysed via fire assay using a 40g charge. Visible gold has been reported in recent and historic logging.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Current core drilling is via NQ2 core size. Core is currently oriented using a True Core tool, which is a commercially available product. Historic diamond drilling was a mixture of NQ2 and LTK48 core sizes.
	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Diamond drill recoveries are recorded as a percentage calculated from measured core versus drilled intervals. Achieving >95% recovery. Greater than 0.2 metre discrepancies are resolved with the drill supervisor.
Drill sample recovery	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Standard diamond drilling practice results in high recovery due to competent nature of the ground.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	There is no known relationship between sample recovery and grade, sample recovery is very high.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Core logging is carried out by company and contract geologists. Holes are routinely logged for lithology, alteration and mineralisation and where oriented and appropriate structural measurements are collected. Geotechnical logging is limited to recording RQD data for exploration holes.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging is qualitative and all core is photographed. Visual estimates are made of sulphide, quartz vein and alteration percentages.
	<i>The total length and percentage of the relevant intersections logged.</i>	100% of the drill core is logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Current sampling is via half core, which is cut using an Almonte diamond core saw with the right half consistently sampled to intervals delineated by the logging geologist. The left half is archived. All major mineralised zones are sampled plus associated visibly barren host rock between 1 and 5m depending on the thickness of the primary sample interval. Sample intervals range from 0.1 to 1.2m in length. Historic sampling was a mixture of whole core and half core sampling as above.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Current drilling is only via diamond coring.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Sample preparation is conducted at a commercial laboratory to an acceptable standard. Blank samples are routinely submitted to assess the preparation QAQC.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	For drill core the external labs coarse duplicates are used. CRM standards are inserted into the sample stream on a 1:20 ratio in addition to internal laboratory CRMs. Blanks are inserted into the sample stream routinely to assess the QAQC of the sample preparation stage.

High-grades Continue to Elevate Paulsens

Section 1: Sampling Techniques and Data		
Criteria	JORC Code Explanation	Commentary
Quality of assay data and laboratory tests	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second half sampling.</i>	Field duplicates are not utilised in the current drill program. Routine other half core sampling is not undertaken, but half core is archived for re-sampling if deemed necessary. Duplicate lab analysis is routinely undertaken at regular sampling intervals on crushed material.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample sizes are considered appropriate.
	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	For all drill core samples, gold concentration is determined by fire assay using the lead collection technique with a 40 gram sample charge weight. An AAS finish is used, considered to be total gold.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No other sources of data reported.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	The QAQC protocols used include the following for all drill samples: Commercial coarse blanks are inserted at an incidence of 1 in 40 samples or after intervals of significant visual mineralisation. Commercially prepared certified reference materials are inserted at an incidence of 1 in 20 samples. The CRM used is not identifiable to the laboratory. The primary laboratory QAQC protocols used include the following for all drill samples: Repeat of pulps at a rate of 5%. Screen tests (percentage of pulverised sample passing a 75µm mesh) are undertaken on 1 in 100 samples. Failed standards are followed up by re-assaying a second 40 g pulp sample of the failed standard ± 10 samples either side by the same method at the primary laboratory. Both the accuracy component (CRM's and umpire checks) and the precision component (duplicates and repeats) are deemed acceptable.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant intercepts have been reviewed by the competent person as part of the due diligence process
	<i>The use of twinned holes.</i>	No twinned holes have been drilled as part of this drill program.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Current logging is done via a protected Excel spreadsheet and uploaded into an external Access database at the completion of each drillhole. The original logs are archived.
Location of data points	<i>Discuss any adjustment to assay data.</i>	No adjustments to assay data have been made.
	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Drill hole collar positions are picked up by survey using a calibrated total station Leica 1203+ instrument. Drill hole, downhole surveys are recorded at the collar and then every 50m downhole using a Devi Gyro, north-seeking tool with the Paulsens Local Grid transformation pre-loaded.
	<i>Specification of the grid system used.</i>	A local grid system (Paulsen Mine Grid) is used. It is rotated 41.7 degrees to the west of GDA94 – MGA zone 50 grid. Local origin is 50,000N and 10,000E Conversion. MGA E = (East_LOC*0.75107808+North_LOC*0.659680194+381644.16) MGA N = (North_LOC*0.75107808-East_LOC*0.659680194+7571963.75) MGA RL = mRL_LOC-1000
	<i>Quality and adequacy of topographic control.</i>	Topographic control is not relevant to the underground mine. For general use, an airborne survey was flown in 2023. Resolution is +/- 0.5m.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Exploration result data spacing can be highly variable, up to 100m and down to 10m.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Measured data spacing is better than 7m x 7m and restricted to areas in immediate proximity to mined development. Data spacing for indicated material is approximately, or better than, 20m x 20m. All other areas where sample data is greater than 20m x 20m, or where intercept angle is low, is classified as inferred.
Orientation of data in relation to geological structure	<i>Whether sample compositing has been applied.</i>	Core sampling is conducted on geologic intervals and is not field-composited. Assay data is composited using a 1g/t cut-off with up to 2m total internal dilution and 1m continuous dilution.
	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drilling is designed to be as close to perpendicular to the known mineralised trend being tested as achievable given drill collar location constraints. Core is routinely oriented and structural measurements taken of significant mineralisation zones to calculate true thickness during Resource Estimation. Hanging-wall drill drives provide excellent intercept orientation to the geological structures used in the estimate.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The drill orientation to mineralised structures biases the number of samples per drill hole. It is not thought to make a material difference in the Resource estimation as opportunity arises, better angled holes are drilled with higher intersection angles.

High-grades Continue to Elevate Paulsens

Section 1: Sampling Techniques and Data		
Criteria	JORC Code Explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	All samples are selected, cut and bagged in tied pre-numbered calico bags, grouped in larger tied plastic bags, and placed in large bulka bags with a sample submission sheet. The bulka bags are transported via freight truck to Perth, with consignment note and receipts. Sample pulp splits are returned to BC8 via return freight and stored in shelved containers on site. Pre BC8 operator sample security assumed to be similar and adequate.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Recent external review confirmed core and face sampling techniques are to industry standard. Data handling is considered adequate and was further improved recently with a new database. Pre BC8 data audits found less QAQC reports, though in line with industry standards at that time.
Section 2: Reporting of Exploration Results		
Criteria	JORC Code Explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as Joint Ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	Paulsens Gold Mine is located on tenements M08/99 and M08/196, both of which are held by Black Cat (Paulsens) Pty Ltd, a subsidiary of Black Cat Syndicate Ltd and are in good standing. All production is subject to a Western Australian state government Net Smelter Return ("NSR") royalty of 2.5%. There are several registered heritage sites on surface around the Paulsens Gold Mine, but they do not impact underground operations.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	No known impediment to obtaining a licence to operate exists and the remainder of the tenements are in good standing.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Extensive exploration and development have been conducted around Paulsens dating from the 1970s for various commodities, including gold and base metals. Several operators have conducted exploration, much of which is recorded digitally in the Black Cat database. Most recently, Paulsens was owned by Northern Star, who conducted significant underground and surface exploration, which Black Cat has in digital form. Work activities included: <ul style="list-style-type: none"> - Extensive underground drilling and development work - Surface RC and diamond drilling around Paulsens Gold Mine and on regional tenure - Several campaigns of surface and underground bedrock mapping to constrain the local and district-scale structural architecture as an aid in exploration targeting - Several rounds of geophysical acquisitions including airborne magnetics and radiometrics, surface gravity surveys, ground and airborne EM surveying and 2D and 3D seismic surveys over the Paulsens Gold Mine
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Paulsens is a narrow vein orogenic gold deposit hosted in the Wyloo dome within the Ashburton Basin. Mineralisation is hosted in quartz-sulphide (pyrite, pyrrhotite, chalcopyrite and galena) veins ranging in thickness from a few centimetres to several metres, as well as in semi-massive sulphidic shear zones containing milled sulphides (primarily pyrite and chalcopyrite). Most of the mined ore zone at Paulsens is hosted in veins within a highly sheared argillic sandstone/siltstone within a broad shear zone that forms a subsidiary structure to the regionally extensive Nanjilgardy Fault system. A second set of mineralised quartz veins are hosted in tension gash structures within the Paulsens Mine Gabbro, which is a medium grained gabbro/dolerite sill that intrudes the sedimentary succession. The mined portion of the Paulsens Deposit is hosted in a shear zone that cuts through the Paulsens Mine Gabbro and offsets the gabbro several 10s to 100s of metres.
Drill hole information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> • easting and northing of the drill hole collar; • elevation or Reduced Level ("RL") (elevation above sea level in metres) of the drill hole collar; • dip and azimuth of the hole; • down hole length and interception depth; • hole length; and • if the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	All drill collar location details are reported in the body of this report.

High-grades Continue to Elevate Paulsens

Section 2: Reporting of Exploration Results		
Criteria	JORC Code Explanation	Commentary
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high-grades) and cut-off grades are usually Material and should be stated.</i>	Composite assay results are reported using a 1g/t Au lower cut-off. No top-cut is applied to assay data.
	<i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	All composites are reported with a maximum total internal waste of 2m, with up to 1m of contiguous waste included between mineralised intervals. The minimum composite grade reported is 1g/t. Internal high grades are reported in the body of the text as “including” intervals. Typically, these high-grade sub-intervals are reported if they are more than 10x the composite grade
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Not applicable, as no metal equivalent values have been reported.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’).</i>	All intercepts are reported as downhole depths which is considered close to true width for most intercepts.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Appropriate diagrams have been included in the body of the announcement.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results are not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All significant results have been tabulated in this release, including drillholes with no significant results
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Geophysical surveys including aeromagnetic surveys and seismic have been carried out by previous owners to highlight and interpret prospective structures in the project area.
Further work	<i>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Black Cat is continuing an exploration program which will target extension of mineralisation and regional targets within the Paulsens area