

12 January 2023

ABOUT ADRIATIC METALS (ASX:ADT, LSE:ADT1, OTCQX:ADMLF)

Adriatic Metals Plc is focused on the development of the 100%-owned, Vares high-grade silver project in Bosnia & Herzegovina, and exploration at the Raska base & precious metals project in Serbia.

DIRECTORS

Mr Michael Rawlinson
NON-EXECUTIVE CHAIRMAN

Mr Paul Cronin
MANAGING DIRECTOR & CEO

Mr Peter Bilbe
NON-EXECUTIVE DIRECTOR

Mr Julian Barnes
NON-EXECUTIVE DIRECTOR

Ms Sandra Bates
NON-EXECUTIVE DIRECTOR

Ms Sanela Karic
NON-EXECUTIVE DIRECTOR

adriaticmetals.com

CONTINUED HIGH-GRADE MINERALISATION EXPANDING RUPICE NORTHWEST

VARES PROJECT EXPLORATION HIGHLIGHTS

Exploration drilling at Rupice Northwest continues to intercept thick, high-grade massive sulphide mineralisation up-dip, down-dip and down-plunge from previously reported intersections. The current drilling campaign at Rupice Northwest ("Rupice NW") has achieved the objective of identifying a new body of significant mineralization to the northwest of the existing Rupice Mineral Resource ("RMR").

The drilling continues from 2022 into 2023 with the aim of fully defining the mineralisation and attempting to connect the Rupice NW mineralisation to the main body of Rupice mineralisation. The drilling will continue to a stage where an updated RMR can be released.


The intercepts announced are assay results from nine exploration drill holes, all of which are targeting Rupice NW, additional to the twelve already reported from 2022. Seven holes remain to be reported on, out of a total of twenty-eight completed holes in 2022.

Completion of Rupice and Rupice NW massive sulphide 3D modelling, coupled with relogging and assays from previously unsampled Rupice core has identified opportunities to expand the existing RMR up-dip, down-dip and to the southeast of the existing RMR. Extensive drill testing is planned across newly identified areas to further expand the RMR in 2023.

Presented assay results are in addition to results previously announced for Rupice NW on 26 October 2022.



Figure 1: Plan view map of Rupice and location of recent drilling activity

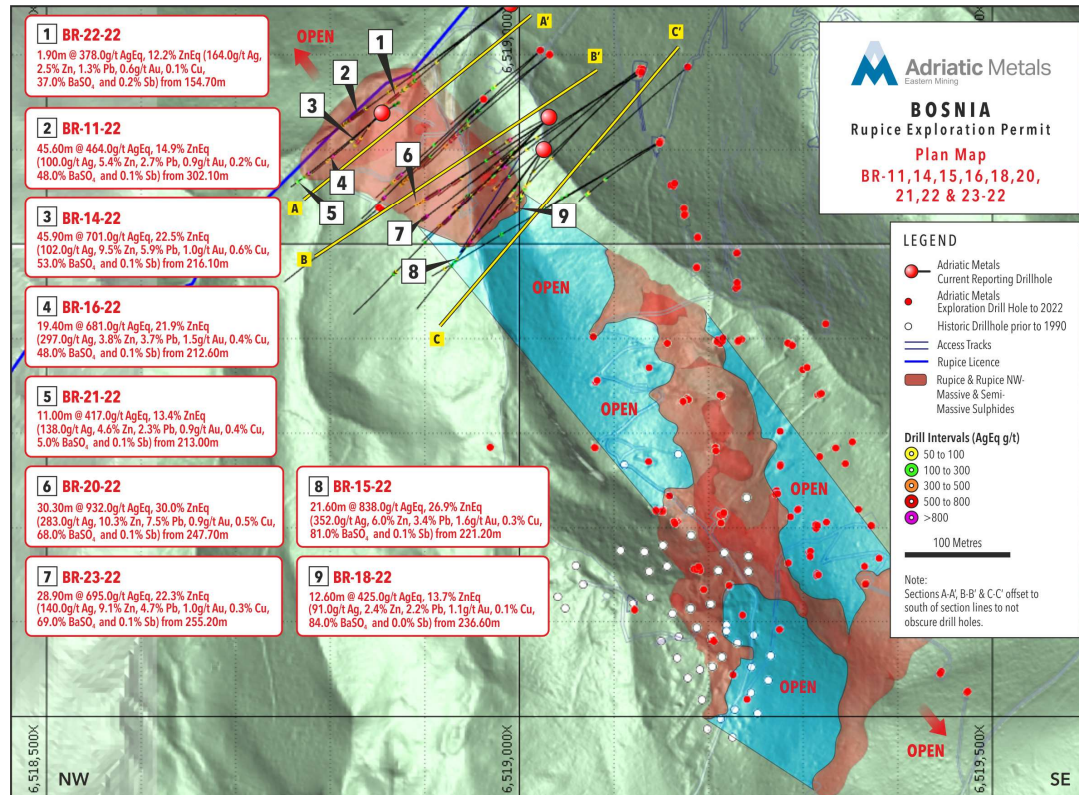

Note: Sections A-A', B-B', C-C' offset to southeast of section lines to not obscure drill holes traces.

Drillhole highlights:

Drillholes BR-14-22, BR-16-22, BR-21-22 and BR-22-22 are located 225m northwest of the RMR. They are respectively drilled up-dip of previously reported hole BR-08-22 (41.00m at 520.0 g/t AgEq) and BR-10-22 (4.30m at 682.0 g/t AgEq) intercepted:

- BR-14-22 – **45.90m at 701.0 g/t AgEq, 22.50% ZnEq** (102.0 g/t Ag, 9.50% Zn, 5.90% Pb, 1.00 g/t Au, 0.60% Cu, 53.0% BaSO₄, 0.10% Sb) from 216.10m
 - including **13.80m at 1,147.0 g/t AgEq, 36.90% ZnEq** (186.0 g/t Ag, 16.20% Zn, 11.80% Pb, 1.40 g/t Au, 0.90% Cu, 50.0% BaSO₄, 0.10% Sb) from 238.00m.
- BR-16-22 – **19.40m at 681.0 g/t AgEq, 21.90% ZnEq** (297.00 g/t Ag, 3.80% Zn, 3.70% Pb, 1.50 g/t Au, 0.40% Cu, 48.0% BaSO₄, 0.10% Sb) from 212.60m
 - including **10.50m at 1,132.0 g/t AgEq, 36.40% ZnEq** (508.0 g/t Ag, 6.10% Zn, 6.50% Pb, 2.50 g/t Au, 0.60% Cu, 72.0% BaSO₄, 0.20% Sb) from 216.60m.
- BR-21-22 – **11.00m at 417.0 g/t AgEq, 13.40% ZnEq** (138.00 g/t Ag, 4.60% Zn, 2.30% Pb, 0.90 g/t Au, 0.40% Cu, 5.0% BaSO₄, 0.10% Sb) from 213.00m
 - including **3.10m at 669.0 g/t AgEq, 21.50% ZnEq** (326.00 g/t Ag, 5.50% Zn, 3.20% Pb, 1.30 g/t Au, 0.40% Cu, 11.00% BaSO₄, 0.10% Sb) from 213.00m.
- BR-22-22 – **1.90m at 378.0 g/t AgEq, 12.20% ZnEq** (164.0 g/t Ag, 2.50% Zn, 1.30% Pb, 0.60 g/t Au, 0.10% Cu, 37.0% BaSO₄, 0.20% Sb) from 154.70m

Drillhole BR-11-22 is located 250m northwest of the RMR and drilled up-dip of the currently reported hole BR-08-22 (41.00m at 520.0 g/t AgEq) and BR-10-22 (4.30m at 682.0 g/t AgEq) intercepted:



- BR-11-22 – **45.60m at 464.0 g/t AgEq, 14.90% ZnEq** (100.0 g/t Ag, 5.40% Zn, 2.70% Pb, 0.90 g/t Au, 0.20% Cu, 48.0% BaSO₄, 0.10% Sb) from 302.10m
 - including **2.00m at 1,226.0 g/t AgEq, 39.40% ZnEq** (228.0 g/t Ag, 15.30% Zn, 14.60% Pb, 1.20 g/t Au, 1.20% Cu, 49.0% BaSO₄, 0.20% Sb) from 328.00m.

Drillholes BR-15-22 and BR-18-22, located 85m northwest of the RMR and drilled down plunge of the previously reported hole BR-12-22 (12.30m at 797.0 g/t AgEq) and BR-13-22 (19.90m at 846.0g/t AgEq), intercepted:

- BR-15-22 – **23.00m at 71.0 g/t AgEq, 2.30% ZnEq** (11.0 g/t Ag, 1.10% Zn, 0.50% Pb, 0.10 g/t Au, 0.10% Cu, 1.0% BaSO₄, 0.00% Sb) from 144.00m.
- BR-15-22 – **21.60m at 838.0 g/t AgEq, 26.90% ZnEq** (352.0 g/t Ag, 6.00% Zn, 3.40% Pb, 1.60 g/t Au, 0.30% Cu, 81.0% BaSO₄, 0.10% Sb) from 221.20m.
- BR-18-22 – **4.20m at 110.0 g/t AgEq, 3.50% ZnEq** (95.0 g/t Ag, 0.30% Zn, 0.10% Pb, 0.00 g/t Au, 0.10% Cu, 0.0% BaSO₄, 0.00% Sb) from 187.30m
- BR-18-22 – **12.60m at 425.0 g/t AgEq, 13.70% ZnEq** (91.0 g/t Ag, 2.40% Zn, 2.20% Pb, 1.10 g/t Au, 0.10% Cu, 84.0% BaSO₄, 0.00% Sb) from 236.60m.

Drillholes BR-20-22 and BR-23-22 located 120m northwest of RMR and down dip of the previously reported holes BR-09-22 (11.80m at 1,212.0 g/t AgEq), intercepted:

- BR-20-22 – **30.30m at 932.0 g/t AgEq, 30.00% ZnEq** (283.0 g/t Ag, 10.30% Zn, 7.50% Pb, 0.90 g/t Au, 0.50% Cu, 68.0% BaSO₄, 0.10% Sb) from 247.70m
 - including **7.30m at 1,449.0 g/t AgEq, 46.60% ZnEq** (282.0 g/t Ag, 19.50% Zn, 16.60% Pb, 1.40g/t Au, 1.40% Cu, 39.0% BaSO₄, 0.20% Sb) from 270.00m.
- BR-23-22 – **3.40m at 1,295.0 g/t AgEq, 41.60% ZnEq** (782.0 g/t Ag, 4.70% Zn, 6.10% Pb, 1.70 g/t Au, 1.00% Cu, 42.0% BaSO₄, 0.80% Sb) from 146.30m
- BR-23-22 – **28.90m at 695.0 g/t AgEq, 22.30% ZnEq** (140.0 g/t Ag, 9.10% Zn, 4.70% Pb, 1.00 g/t Au, 0.30% Cu, 69.0% BaSO₄, 0.10% Sb) from 255.20m
 - including **3.00m at 1,178.0 g/t AgEq, 37.90% ZnEq** (286.0 g/t Ag, 14.00% Zn, 7.70% Pb, 2.60 g/t Au, 0.80% Cu, 56.0% BaSO₄, 0.20% Sb) from 280.00m

2022 Exploration Works

As previously announced on 26 October 2022, step-out exploration drilling intersected high-grade mineralisation in drill holes BR-04-22, BR-05-22, BR-06-22, BR-07-22, BR-08-22, BR-09-22, BR-10-22, BR-12-22 and BR-13-22, located 90 to 250m northwest of the existing RMR. The Company has continued exploration activities to define the Rupice NW extension on a drilling pattern of 40m spaced lines with holes drilled in fans to achieve a 25m to 30m separation between mineralisation intersections on the drill lines (sections). The continuity of mineralisation is consistent with geologists having a high success rate of being able to predict mineralisation occurrence within 5m of interpreted target.

The new results have shown continuity of mineralisation up-dip and down-plunge from previous reported drill holes BR-08-22, BR-09-22, BR-10-22, BR-12-22 and BR-13-22. Hole BR-21-22 extended the previously known mineralisation 152m up-dip, while hole BR-22-22 confirmed continuity within the upper zone of mineralisation. Holes BR-18-22 and BR-23-22 extended the previous known mineralization 70m down-dip verifying the extension of the existing massive sulphide orebody.

Drill holes BR-25-22, BR-26-22, BR-27-22, BR-29-22, BR-30-22 and BR-32-22 have also been completed and are awaiting assay results. Each of these holes intersected significant zones of massive sulphide mineralisation. Drilling of Rupice NW will continue during winter with the objective of generating a maiden Inferred resource estimate for Rupice NW in Q1 2023.



Paul Cronin, Adriatic's Managing Director and CEO, commented:

"I am delighted at the drilling success at Rupice NW which demonstrates that the mineralised system continues to expand and remains open along strike, up and down-dip. The ongoing success of the Rupice NW drilling campaign affirms Adriatic's growth strategy to achieve at least a 20 year mine life at Rupice.

"The sheer size of Rupice NW has meant that further drilling will be required to define the mineralized system. Drilling will therefore continue into 2023, to attempt to close-out mineralisation and connect Rupice NW to Rupice. A maiden resource for Rupice NW will be released once existing areas of defined mineralisation are closed-off and the scale of the mineralised system within Adriatic's tenement holdings has been fully realised."

For further information please visit: www.adriaticmetals.com; email: info@adriaticmetals.com, [@AdriaticMetals](https://twitter.com/AdriaticMetals) on Twitter; or contact:

Adriatic Metals PLC

Paul Cronin / Klara Kaczmarek

Via Buchanan

Buchanan

Bobby Morse / Oonagh Reidy

Tel: +44 (0) 20 7466 5000

adriatic@buchanan.uk.com

Canaccord Genuity Limited (Joint Corporate Broker)

Jeremy Dunlop (Australia)

James Asensio (UK)

Tel: +61 2 9263 2700

Tel: +44 (0) 207 523 8000

RBC Capital Markets (Joint Corporate Broker)

James Agnew / Jamil Miah

Tel: +44 (0) 20 7653 4000

Stifel Nicolaus Europe Limited (Joint Corporate Broker)

Ashton Clanfield / Callum Stewart

Tel: +44 (0) 20 7710 7600

Citadel Magnus

Cameron Gilenko

Tel: +61 2 8234 0100

RUPICE NORTHWEST EXPLORATION RESULTS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) ("Adriatic" or the "Company") is pleased to report on recent exploration results at the Company's flagship Vares Silver Project in Bosnia & Herzegovina.

As previously announced on the 26 October 2022, exploration drilling intersected high-grade mineralisation in drill holes BR-04-22, BR-05-22, BR-06-22, BR-07-22, BR-08-22, BR-09-22, BR-10-22, BR-12-22 and BR-13-22 located 90m to 250m northwest of the existing RMR. Subsequently, the Company has focused exploration activities on testing this potential northwest extension ("Rupice NW") with continued success. Results from new drill holes BR-11-22, BR-14-22, BR-15-22, BR-16-22, BR-18-22, BR-20-22, BR-21-22, BR-22-22, and BR-23-22 are detailed below.

Drill holes BR-11-22, BR-14-22, BR-16-22 and BR-21-22 extended the previously known mineralisation 152m up-dip of drill hole BR-08-22, while hole BR-22-22 confirmed continuity within the Upper Zone of mineralisation.



Successful drilling outcomes in 2022 together with extensive relogging, new sampling, interpretation and modelling has provided a road-map to targeting mineralisation extensions at Rupice and Rupice NW in 2023. Drilling will continue in 2023 to extend Rupice and Rupice NW mineralisation up- and down-dip, along-strike and within areas of drilling gaps identified by 3D modelling of sulphides. The priority remains to fully define Rupice NW and attempt to connect it to the main RMR across a 90m drilling gap during Q1 2023. A Mineral Resource Estimate (“MRE”) will be completed for Rupice and Rupice NW once drilling is advanced enough to better define the extents of the larger than expected Rupice NW and Rupice mineralised bodies, as well as drilling across a 90m gap to connect Rupice to Rupice NW.

An additional diamond drilling rig is being mobilised to achieve 2023 drilling objectives. A total of four diamond drill rigs will be focussed on Rupice and Rupice NW as the highest priority.

Additional exploration drilling programs across the Droskovac, Semizova Ponikva and Rupice West prospects are also scheduled for 2023. All regional exploration projects are at the drilling test stage after completion of successful geophysical, soil sampling, mapping and interpretive work. Maintaining an active exploration pipeline of advancing projects remains a priority for Adriatic.

Figure 2: Cross-section (A'-A) through BR-11-22, BR-14-22, BR-16-22, BR-21-22 and BR-22-22

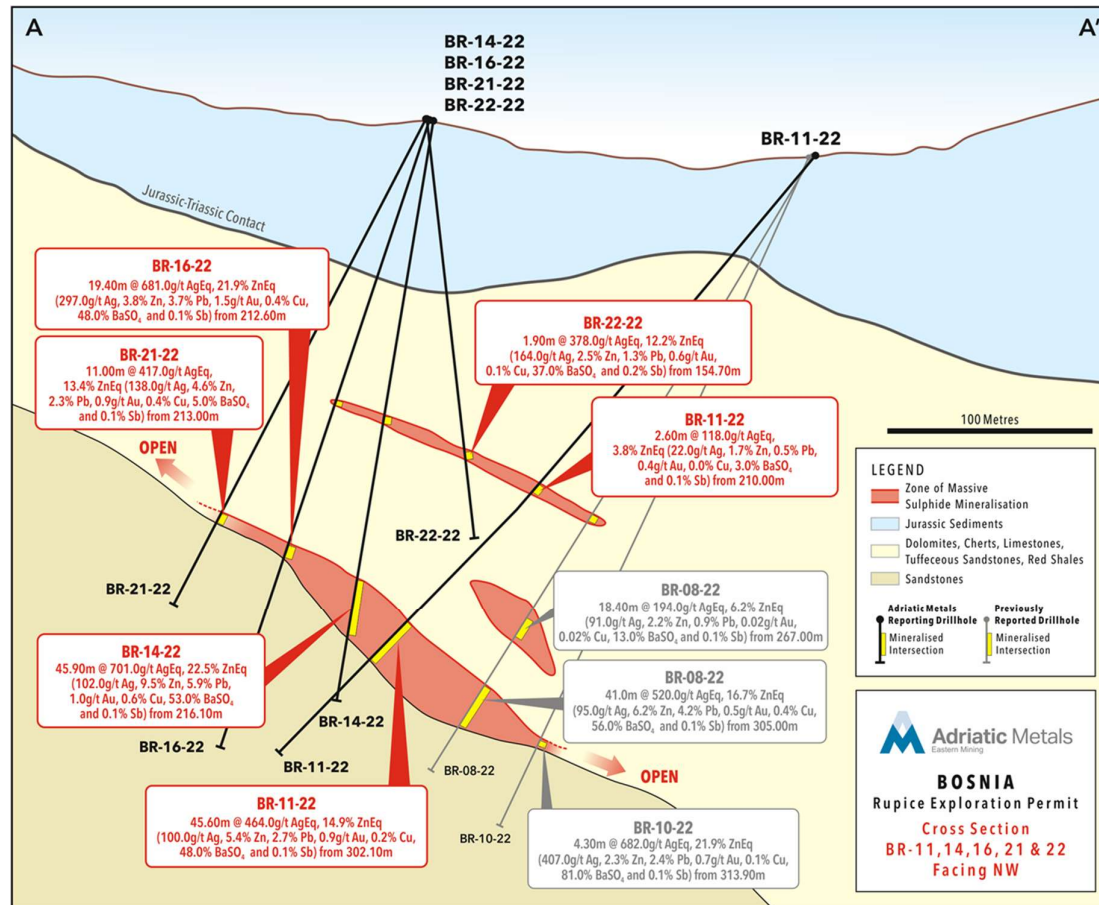




Figure 3: Cross-section (B'-B) through BR-20-22 and BR-23-22

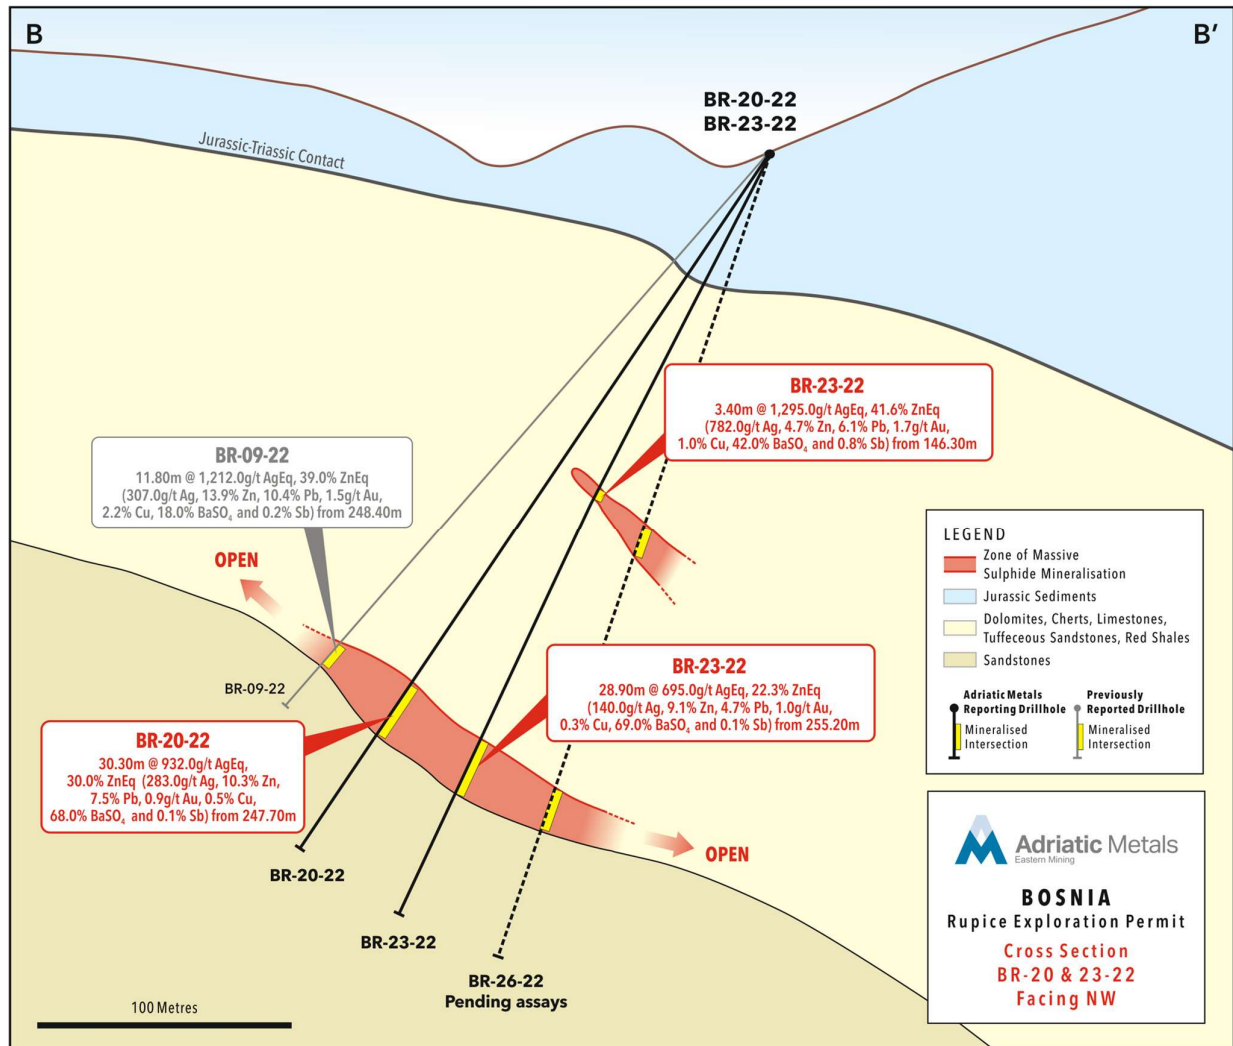




Figure 4: Cross-section (C'-C) through BR-15-22 and BR-18-22


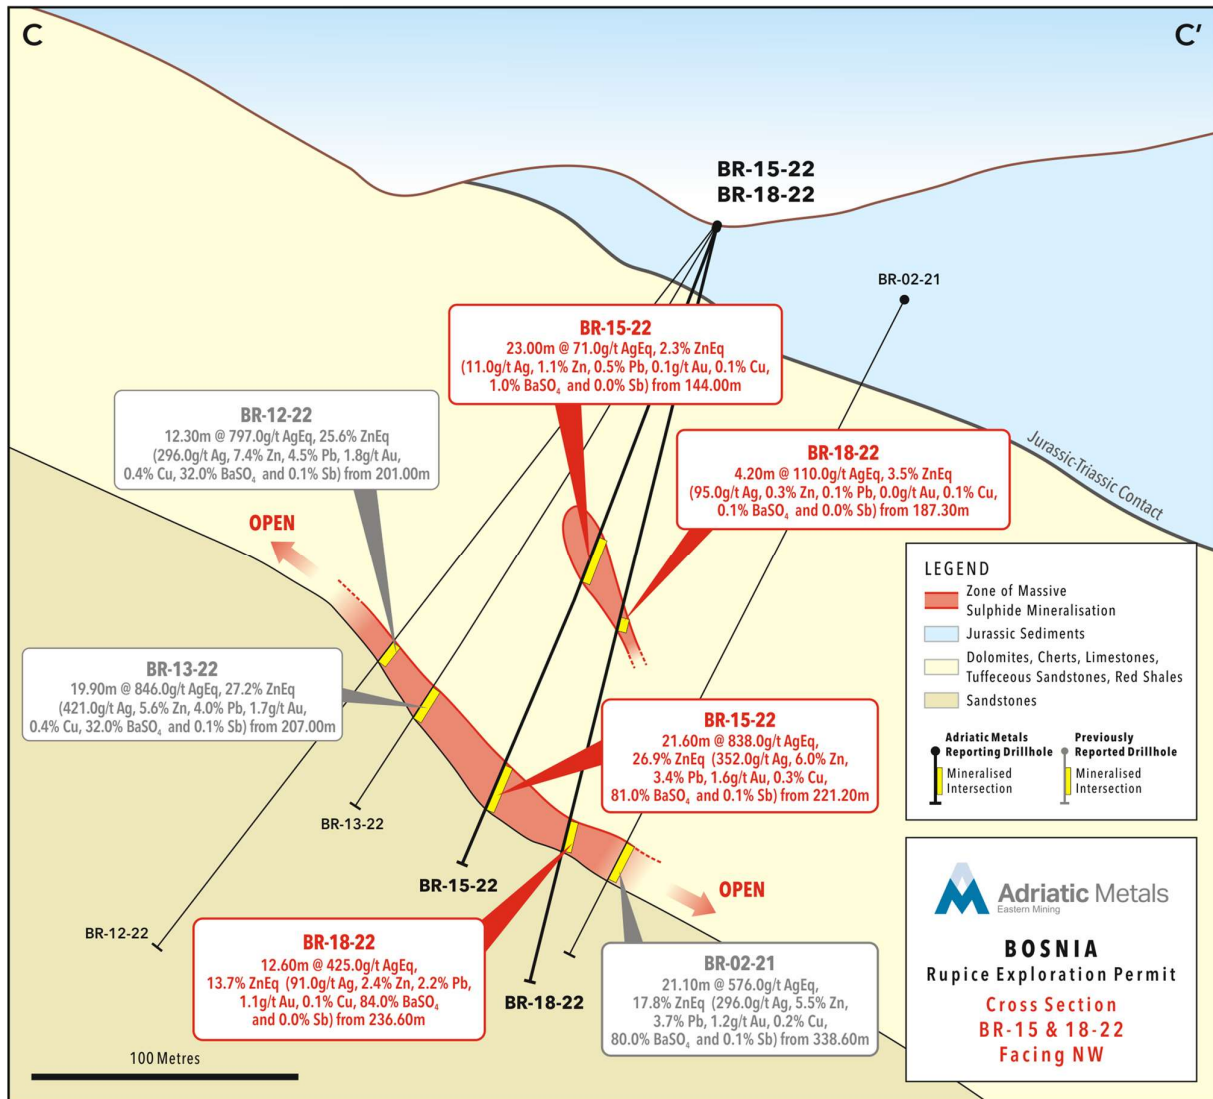




Figure 5 Long-Section of Rupice looking southwest.

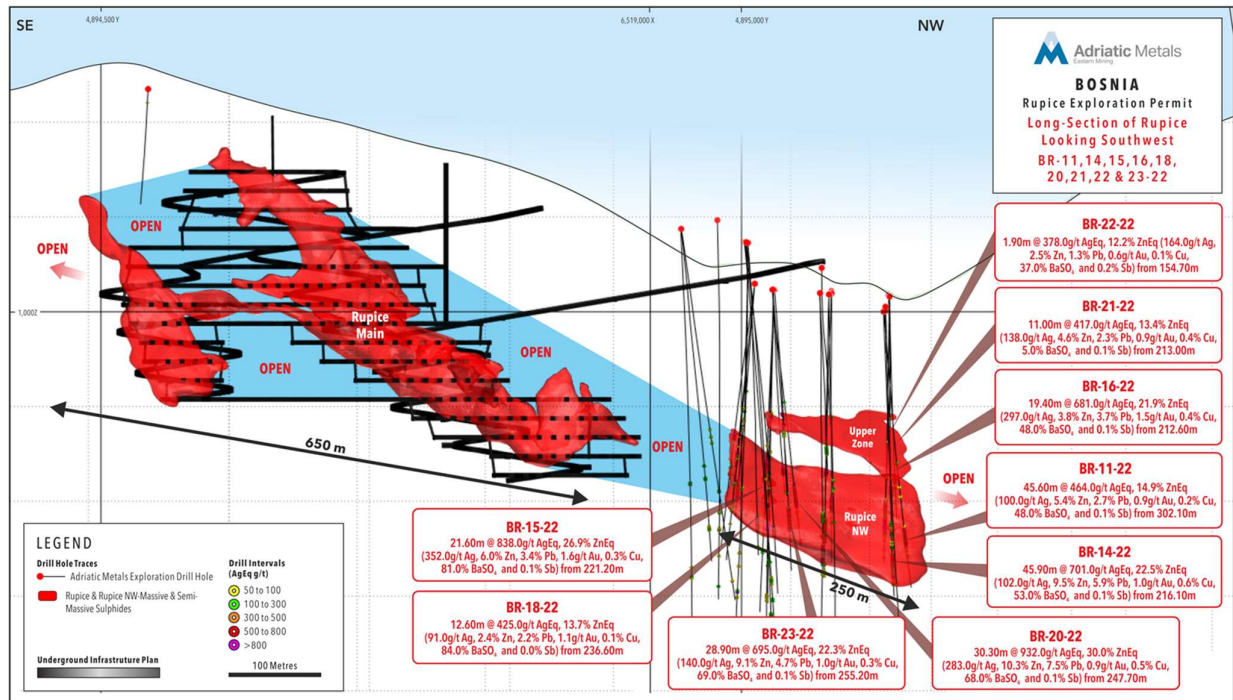

-ends-

MARKET ABUSE REGULATION DISCLOSURE

The information contained within this announcement is deemed by the Company (LEI: 549300OHAH2GL1DP0L61) to constitute inside information as stipulated under the Market Abuse Regulations (EU) No. 596/2014. The person responsible for arranging and authorising the release of this announcement on behalf of the Company is Paul Cronin, Managing Director and CEO.

Authorised by Paul Cronin, Managing Director & CEO

COMPETENT PERSONS REPORT

The information in this report which relates to exploration results is based on and fairly represents information and supporting documentation compiled by Mr Sergei Smolonogov, who is a member of the Australian Institute of Geoscientists (AIG). Mr Smolonogov is an employee of Adriatic Metals PLC and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Smolonogov consents to the inclusion in this report of the matters based on that information in the form and context in which it appears.



ABOUT ADRIATIC METALS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) is a precious and base metals developer that is advancing the world-class Vares Silver Project in Bosnia & Herzegovina, as well as the Raska Zinc-Silver Project in Serbia.

The Vares Silver Project is fully funded to production, which is expected in Q3 2023. The 2021 Project Definitive Feasibility Study shows robust economics of US\$1,062 million post-tax NPV8, 134% IRR and a capex of US\$168 million. Concurrent with ongoing construction activities, the Company continues to explore across its highly prospective 42km² concession package.

The Mineral Resource estimate for the Rupice underground deposit comprising part of the Vares Silver Project was announced in accordance with ASX Listing Rule 5.8 on 1 September 2020. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.

The Ore Reserve estimate for the Rupice deposit comprising part of the Vares Silver Project was announced in accordance with ASX Listing Rule 5.9 on 19 August 2021. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.

In accordance with ASX Listing Rule 5.19, the Company confirms that the production targets and forecast financial information for the Vares Project were first disclosed in accordance with ASX Listing Rules 5.16 and 5.17 in the Company's announcement dated 19 August 2021. The Company confirms that all the material assumptions underpinning the production target and the forecast financial information in the previous announcement continue to apply and have not materially changed.

DISCLAIMER

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All of such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Our audience is cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and we do not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.



APPENDIX 1- ASSAY TABLES

Table 1– Significant intercepts for reported drill holes

Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
	(m)	(m)	(m)	(g/t)	(%)	(g/t)	(%)	(%)	(g/t)	(%)	(%)	(%)
BR-11-22	210.00	212.60	2.60	118.0	3.80	22.00	1.70	0.50	0.40	0.00	3.0	0.10
BR-11-22	302.10	347.75	45.60	464.0	14.90	100.00	5.40	2.70	0.90	0.20	48.0	0.10
<i>Including</i>	<i>328.00</i>	<i>330.00</i>	<i>2.00</i>	<i>1,226.0</i>	<i>39.40</i>	<i>228.00</i>	<i>15.30</i>	<i>14.60</i>	<i>1.20</i>	<i>1.20</i>	<i>49.0</i>	<i>0.20</i>
BR-14-22	216.10	262.00	45.90	701.0	22.50	102.00	9.50	5.90	1.00	0.60	53.0	0.10
<i>Including</i>	<i>238.00</i>	<i>251.80</i>	<i>13.80</i>	<i>1,147.0</i>	<i>36.90</i>	<i>186.00</i>	<i>16.20</i>	<i>11.80</i>	<i>1.40</i>	<i>0.90</i>	<i>50.0</i>	<i>0.10</i>
BR-15-22	144.00	167.00	23.00	71.0	2.30	11.00	1.10	0.50	0.10	0.10	1.0	0.00
BR-15-22	221.20	242.80	21.60	838.0	26.90	352.00	6.00	3.40	1.60	0.30	81.0	0.10
BR-16-22	212.60	232.00	19.40	681.0	21.90	297.00	3.80	3.70	1.50	0.40	48.0	0.10
<i>Including</i>	<i>212.60</i>	<i>223.10</i>	<i>10.50</i>	<i>1,132.0</i>	<i>36.40</i>	<i>508.00</i>	<i>6.10</i>	<i>6.50</i>	<i>2.50</i>	<i>0.60</i>	<i>72.0</i>	<i>0.20</i>
BR-18-22	187.30	191.50	4.20	110.0	3.50	95.00	0.30	0.10	0.00	0.10	0.1	0.00
BR-18-22	236.60	249.20	12.60	425.0	13.70	91.00	2.40	2.20	1.10	0.10	84.0	0.00
BR-20-22	247.70	278.00	30.30	932.0	30.00	283.00	10.30	7.50	0.90	0.50	68.0	0.10
<i>Including</i>	<i>270.00</i>	<i>277.30</i>	<i>7.30</i>	<i>1,449.0</i>	<i>46.60</i>	<i>282.00</i>	<i>19.50</i>	<i>16.60</i>	<i>1.40</i>	<i>1.40</i>	<i>39.0</i>	<i>0.20</i>
BR-20-22	281.90	293.90	12.00	50.0	1.60	15.00	0.40	0.20	0.10	0.10	2.0	0.00
BR-21-22	213.00	224.00	11.00	417.0	13.40	138.00	4.60	2.30	0.90	0.40	5.0	0.10
<i>Including</i>	<i>213.00</i>	<i>216.10</i>	<i>3.10</i>	<i>669.0</i>	<i>21.50</i>	<i>326.00</i>	<i>5.50</i>	<i>3.20</i>	<i>1.30</i>	<i>0.40</i>	<i>11.0</i>	<i>0.10</i>
BR-21-22	244.10	247.60	3.50	95.0	3.10	34.00	0.90	0.50	0.20	0.10	2.0	0.00
BR-22-22	154.70	156.60	1.90	378.0	12.20	164.00	2.50	1.30	0.60	0.10	37.0	0.20
BR-23-22	146.30	149.70	3.40	1,295.0	41.60	782.00	4.70	6.10	1.70	1.00	42.0	0.80
BR-23-22	255.20	284.10	28.90	695.0	22.30	140.00	9.10	4.70	1.00	0.30	69.0	0.10
<i>Including</i>	<i>280.00</i>	<i>283.00</i>	<i>3.00</i>	<i>1,178.0</i>	<i>37.90</i>	<i>286.00</i>	<i>14.00</i>	<i>7.70</i>	<i>2.60</i>	<i>0.80</i>	<i>56.0</i>	<i>0.20</i>
Notes												
1. Significant intervals are estimated using a 50g/t AgEq cut off, 2m minimum interval and 5 metres consecutive internal dilution. Higher grade intervals have a 600g/t AgEq cut off												
2. AgEq & ZnEq grades are based on the following metal prices used in the Rupice MRE: \$2000/oz gold, \$25/oz silver, \$2500/t zinc, \$2000/t lead, \$6500/t copper, \$150/t BaSO ₄ & \$6500/t antimony												
3. 90% metal recovery, as per the Rupice MRE, has been applied for all metals												
4. 100% payability was assumed for all metals												
5. The silver equivalent calculation is as follows: AgEq = (Au grade g/t * 72.000) + (Ag grade g/t * 0.900) + (Pb grade % * 22.395) + (Zn grade % * 27.993) + (Cu grade % * 72.782) + (BaSO ₄ grade % * 1.680) + (Sb grade % * 72.782)												
6. The zinc equivalent calculation is as follows: ZnEq = AgEq / 31.1												
7. It is the opinion of Adriatic Metals that all elements and products included in the metal equivalent formula have a reasonable potential to be recovered and sold.												
8. All reported drill holes have all BaSO ₄ fully reported.												

Table 2 – Collar information for reported drill holes

Hole ID	Easting (m) ¹	Northing (m) ¹	Elevation (m)	Depth (m)	Azimuth	Inclination
BR-11-22	6518997	4895261	1001	393.0	229	-48.2
BR-14-22	6518855	4895139	1016	284.4	217	-80.4
BR-15-22	6519025	4895101	1029	265	211	-68.0
BR-16-22	6518855	4895137	1017	322.0	226	-71.6
BR-18-22	6519024	4895100	1030	301.8	204	-75.7
BR-20-22	6519032	4895133	1023	326.9	237	-56.1
BR-21-22	6518854	4895137	1017	266.8	231	-62.4
BR-22-22	6518853	4895137	1017	205.8	56	-83.5
BR-23-22	6519032	4895133	1023	329.7	235	-63.9
Notes						
1. Coordinates are shown using Gauss Kruger MGI Balkan Zone 6						



Table 3 – Assay data for reported drill holes

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)		
BR-11-22	0.0	196.00	196.00	Interval not sampled								
BR-11-22	196.00	198.00	2.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.02		
BR-11-22	198.00	200.00	2.00	<1.0	0.01	0.02	<0.01	0.01	<1.0	0.03		
BR-11-22	200.00	202.00	2.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.02		
BR-11-22	202.00	204.00	2.00	<1.0	0.01	0.05	0.02	0.02	<1.0	0.02		
BR-11-22	204.00	206.00	2.00	<1.0	0.02	0.03	<0.01	0.01	<1.0	0.01		
BR-11-22	206.00	207.20	1.20	<1.0	0.02	0.12	<0.01	0.02	<1.0	0.02		
BR-11-22	207.20	208.50	1.30	<1.0	0.04	0.07	<0.01	0.01	<1.0	0.05		
BR-11-22	208.50	210.00	1.50	3.0	0.12	0.07	0.08	0.01	<1.0	0.02		
BR-11-22	210.00	211.00	1.00	30.0	2.91	0.87	0.49	0.05	3.7	0.08		
BR-11-22	211.00	212.00	1.00	16.0	0.99	0.33	0.30	0.03	3.0	0.05		
BR-11-22	212.00	212.60	0.60	18.0	0.84	0.22	0.29	0.01	2.6	0.06		
BR-11-22	212.60	214.00	1.40	8.0	0.36	0.12	<0.01	<0.01	2.1	0.10		
BR-11-22	214.00	216.00	2.00	4.0	0.31	0.11	<0.01	<0.01	<1.0	0.06		
BR-11-22	216.00	218.00	2.00	2.0	0.15	0.08	<0.01	<0.01	<1.0	0.02		
BR-11-22	218.00	220.10	2.10	4.0	0.12	0.09	<0.01	<0.01	<1.0	0.01		
BR-11-22	220.10	222.00	1.90	<1.0	0.06	0.03	<0.01	<0.01	<1.0	<0.01		
BR-11-22	222.00	224.00	2.00	<1.0	0.09	0.06	<0.01	<0.01	<1.0	0.01		
BR-11-22	224.00	226.00	2.00	<1.0	0.05	0.03	<0.01	<0.01	<1.0	0.02		
BR-11-22	238.00	239.40	1.40	<1.0	0.09	0.01	<0.01	<0.01	<1.0	0.01		
BR-11-22	239.40	241.00	1.60	<1.0	0.08	0.01	<0.01	<0.01	<1.0	0.03		
BR-11-22	241.00	243.00	2.00	<1.0	0.45	0.08	<0.01	<0.01	<1.0	0.06		
BR-11-22	243.00	245.00	2.00	<1.0	0.37	0.09	<0.01	<0.01	<1.0	0.07		
BR-11-22	245.00	247.00	2.00	14.0	2.18	0.56	<0.01	<0.01	<1.0	0.01		
BR-11-22	247.00	249.00	2.00	<1.0	0.04	0.02	<0.01	<0.01	<1.0	0.01		
BR-11-22	249.00	251.00	2.00	<1.0	0.15	0.04	0.02	<0.01	1.0	<0.01		
BR-11-22	251.00	253.00	2.00	3.0	0.18	0.05	0.03	<0.01	<1.0	<0.01		
BR-11-22	253.00	255.00	2.00	1.0	0.10	0.03	0.08	<0.01	<1.0	<0.01		
BR-11-22	255.00	257.00	2.00	4.0	0.09	0.05	0.04	<0.01	<1.0	<0.01		
BR-11-22	257.00	259.00	2.00	22.0	0.25	0.04	0.01	0.01	1.8	<0.01		
BR-11-22	259.00	261.00	2.00	87.0	0.10	0.12	<0.01	0.04	1.4	0.02		
BR-11-22	261.00	263.00	2.00	15.0	0.65	0.10	<0.01	<0.01	1.0	<0.01		
BR-11-22	263.00	265.00	2.00	4.0	0.40	0.07	<0.01	<0.01	<1.0	<0.01		
BR-11-22	265.00	297.00	32.00	Interval not sampled								
BR-11-22	297.00	299.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-11-22	299.00	300.60	1.60	<1.0	0.02	0.03	0.02	0.01	37.8	0.01		
BR-11-22	300.60	302.10	1.50	<1.0	<0.01	0.03	0.05	<0.01	19.6	0.01		
BR-11-22	302.10	303.00	0.90	12.0	0.02	0.10	2.13	0.01	86.8	<0.01		
BR-11-22	303.00	304.00	1.00	64.0	0.10	0.34	2.14	0.05	86.2	0.04		
BR-11-22	304.00	305.00	1.00	14.0	0.01	0.06	0.6	<0.01	95.8	<0.01		
BR-11-22	305.00	306.00	1.00	876.0	1.88	0.65	8.82	0.37	81.3	0.21		
BR-11-22	306.00	307.00	1.00	102.0	2.12	0.51	1.86	0.10	88.6	0.06		
BR-11-22	307.00	308.00	1.00	128.0	3.49	0.80	3.73	0.15	83.6	0.07		
BR-11-22	308.00	309.00	1.00	149.0	5.38	2.07	1.35	0.13	83.5	0.08		
BR-11-22	309.00	310.00	1.00	184.0	5.51	1.87	2.08	0.15	82.4	0.10		
BR-11-22	310.00	311.00	1.00	112.0	5.58	1.92	1.17	0.15	82.9	0.10		
BR-11-22	311.00	312.00	1.00	147.0	5.76	1.87	1.61	0.15	81.6	0.11		
BR-11-22	312.00	313.00	1.00	108.0	7.04	2.35	0.91	0.12	80.3	0.11		
BR-11-22	313.00	314.00	1.00	128.0	8.79	2.94	1.18	0.14	76.8	0.08		
BR-11-22	314.00	315.00	1.00	128.0	10.67	3.31	0.54	0.15	74.0	0.09		
BR-11-22	315.00	316.00	1.00	57.0	10.17	3.19	0.47	0.14	75.9	0.06		
BR-11-22	316.00	317.00	1.00	55.0	10.26	3.09	0.28	0.15	75.4	0.06		
BR-11-22	317.00	318.00	1.00	59.0	10.44	3.38	0.29	0.14	75.1	0.04		
BR-11-22	318.00	319.00	1.00	46.0	12.45	4.01	0.18	0.13	72.2	0.04		
BR-11-22	319.00	320.00	1.00	49.0	12.08	4.07	0.25	0.14	71.5	0.04		



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-11-22	320.00	321.00	1.00	48.0	8.68	3.77	0.32	0.14	75.7	0.04
BR-11-22	321.00	322.00	1.00	57.0	7.77	4.65	0.28	0.22	74.6	0.05
BR-11-22	322.00	323.00	1.00	51.0	7.08	4.51	0.18	0.20	76.9	0.06
BR-11-22	323.00	324.00	1.00	56.0	7.42	4.27	0.17	0.20	76.9	0.08
BR-11-22	324.00	325.00	1.00	66.0	6.62	6.45	0.31	0.32	73.6	0.09
BR-11-22	325.00	326.00	1.00	84.0	11.84	6.20	0.62	0.47	65.5	0.12
BR-11-22	326.00	327.00	1.00	95.0	7.79	6.83	0.44	0.40	71.9	0.07
BR-11-22	327.00	328.00	1.00	97.0	11.19	6.45	0.60	0.32	68.3	0.06
BR-11-22	328.00	329.00	1.00	181.0	15.12	13.24	0.94	0.87	51.8	0.16
BR-11-22	329.00	330.00	1.00	274.0	15.46	15.99	1.49	1.43	45.9	0.18
BR-11-22	330.00	330.80	0.80	6.0	0.20	0.17	0.42	0.04	2.1	0.02
BR-11-22	330.80	332.00	1.20	278.0	4.06	1.57	0.38	0.45	4.3	0.15
BR-11-22	332.00	333.00	1.00	109.0	2.36	0.84	0.34	0.22	2.6	0.07
BR-11-22	333.00	334.00	1.00	179.0	1.93	0.54	1.07	0.23	1.6	0.06
BR-11-22	334.00	335.00	1.00	65.0	1.90	0.54	0.18	0.07	1.8	0.03
BR-11-22	335.00	336.00	1.00	13.0	0.47	0.13	0.12	0.02	4.9	<0.01
BR-11-22	336.00	337.00	1.00	35.0	1.52	0.49	0.11	0.06	2.7	0.02
BR-11-22	337.00	338.00	1.00	102.0	2.56	1.18	0.13	0.20	5.8	0.06
BR-11-22	338.00	339.00	1.00	24.0	0.60	0.23	0.09	0.05	1.7	0.02
BR-11-22	339.00	340.00	1.00	56.0	4.76	2.25	0.39	0.17	4.8	0.03
BR-11-22	340.00	341.00	1.00	9.0	0.40	0.08	0.33	0.02	<1.0	<0.01
BR-11-22	341.00	342.00	1.00	7.0	0.17	0.06	0.19	0.01	<1.0	<0.01
BR-11-22	342.00	343.00	1.00	26.0	1.26	0.16	0.23	0.02	4.7	<0.01
BR-11-22	343.00	344.00	1.00	48.0	3.99	0.96	0.30	0.20	6.5	0.04
BR-11-22	344.00	345.00	1.00	47.0	3.20	0.84	0.16	0.35	2.1	0.09
BR-11-22	345.00	346.00	1.00	11.0	0.71	0.29	0.08	0.04	1.5	0.01
BR-11-22	346.00	347.25	1.25	17.0	1.15	0.55	0.12	0.05	2.0	0.01
BR-11-22	347.25	347.75	0.50	63.0	7.86	4.23	0.25	0.49	9.3	0.26
BR-11-22	347.75	349.40	1.65	<1.0	0.33	0.09	0.06	0.03	1.5	0.01
BR-11-22	349.40	351.00	1.60	<1.0	0.42	0.11	0.06	<0.01	3.0	<0.01
BR-11-22	351.00	353.00	2.00	<1.0	0.40	0.06	0.06	<0.01	3.6	<0.01
BR-11-22	353.00	355.00	2.00	3.0	0.30	0.02	0.04	<0.01	2.4	<0.01
BR-11-22	355.00	357.00	2.00	<1.0	0.05	0.01	0.03	<0.01	<1.0	<0.01
BR-11-22	357.00	359.00	2.00	<1.0	0.06	0.01	0.02	<0.01	<1.0	<0.01
BR-11-22	359.00	361.00	2.00	17.0	0.24	0.06	0.14	<0.01	2.4	<0.01
BR-11-22	361.00	363.00	2.00	14.0	0.23	0.10	0.10	<0.01	3.2	<0.01
BR-11-22	363.00	365.00	2.00	<1.0	0.07	0.01	0.02	<0.01	0.7	<0.01
BR-11-22	365.00	367.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	367.00	369.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	369.00	370.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-11-22	370.00	372.00	2.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-11-22	372.00	374.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	374.00	376.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	376.00	378.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	378.00	380.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	380.00	382.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	382.00	384.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	384.00	386.00	2.00	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-11-22	386.00	388.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	1.4	<0.01
BR-11-22	388.00	390.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	390.00	391.50	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-11-22	391.50	393.00	1.50	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-14-22	0.00	132.00	132.00	Interval not sampled						
BR-14-22	132.00	134.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-14-22	134.00	135.50	1.50	<1.0	<0.01	0.02	0.03	0.01	<1.0	0.03
BR-14-22	135.50	137.00	1.50	<1.0	<0.01	0.03	0.02	<0.01	<1.0	0.04



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)		
BR-14-22	137.00	138.60	1.60	<1.0	0.04	0.08	0.03	0.01	<1.0	0.04		
BR-14-22	138.60	139.60	1.00	6	0.15	0.07	0.03	<0.01	<1.0	0.03		
BR-14-22	139.60	140.50	0.90	15	0.47	0.23	0.07	0.01	1.9	0.02		
BR-14-22	140.50	141.10	0.60	168	4.90	6.85	0.71	0.35	6.3	0.25		
BR-14-22	141.10	142.00	0.90	27	0.88	0.89	0.24	0.04	24.3	0.05		
BR-14-22	142.00	142.80	0.80	16	0.43	0.17	0.09	0.01	<1.0	0.02		
BR-14-22	142.80	143.40	0.60	8	0.27	0.08	0.05	<0.01	<1.0	0.01		
BR-14-22	143.40	144.10	0.70	20	0.54	0.17	0.29	0.01	4.8	0.03		
BR-14-22	144.10	146.00	1.90	6	0.17	0.60	0.02	<0.01	0.6	<0.01		
BR-14-22	146.00	148.00	2.00	<1.0	0.10	0.09	<0.01	<0.01	<1.0	0.01		
BR-14-22	148.00	150.00	2.00	<1.0	0.07	0.01	<0.01	<0.01	<1.0	0.01		
BR-14-22	150.00	152.00	2.00	<1.0	0.06	0.15	0.01	<0.01	0.3	<0.01		
BR-14-22	152.00	154.00	2.00	<1.0	0.01	0.13	<0.01	<0.01	<1.0	<0.01		
BR-14-22	154.00	156.00	2.00	<1.0	0.01	0.29	<0.01	<0.01	<1.0	<0.01		
BR-14-22	156.00	158.00	2.00	<1.0	0.01	0.07	<0.01	<0.01	<1.0	<0.01		
BR-14-22	158.00	160.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	160.00	162.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	162.00	164.00	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	164.00	166.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	166.00	168.00	2.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01		
BR-14-22	168.00	169.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	169.40	170.80	1.40	<1.0	0.02	0.04	0.01	<0.01	<1.0	<0.01		
BR-14-22	170.80	172.30	1.50	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	172.30	209.00	36.70	Interval not sampled								
BR-14-22	209.00	211.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-14-22	211.00	213.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	1.5	0.012		
BR-14-22	213.00	214.10	1.10	<1.0	0.02	0.04	0.04	0.012	34.3	<0.01		
BR-14-22	214.10	215.10	1.00	7.0	0.02	0.14	0.28	0.01	90.5	<0.01		
BR-14-22	215.10	216.10	1.00	5.0	0.01	0.14	0.45	<0.01	84.4	<0.01		
BR-14-22	216.10	216.90	0.80	7.0	<0.01	<0.01	2.58	<0.01	68.6	<0.01		
BR-14-22	216.90	217.50	0.60	6.0	<0.01	0.13	1.32	<0.01	86.7	<0.01		
BR-14-22	217.50	218.00	0.50	56.0	<0.01	0.02	1.22	0.02	78.7	<0.01		
BR-14-22	218.00	219.00	1.00	82.0	8.25	3.32	0.70	0.16	74.8	0.04		
BR-14-22	219.00	220.00	1.00	80.0	11.07	4.18	0.64	0.14	79.3	0.02		
BR-14-22	220.00	221.00	1.00	70.0	12.03	3.99	0.79	0.15	78.1	0.03		
BR-14-22	221.00	222.00	1.00	63.0	12.90	4.05	0.8	0.12	76.6	0.04		
BR-14-22	222.00	223.00	1.00	66.0	11.65	4.10	1.15	0.10	79.2	0.05		
BR-14-22	223.00	224.00	1.00	75.0	13.27	4.58	0.9	0.15	73.5	0.08		
BR-14-22	224.00	225.00	1.00	75.0	12.77	4.39	0.69	0.12	75.0	0.07		
BR-14-22	225.00	226.00	1.00	68.0	11.41	3.83	0.7	0.13	77.7	0.06		
BR-14-22	226.00	227.00	1.00	83.0	13.49	6.29	0.71	0.24	68.6	0.09		
BR-14-22	227.00	228.00	1.00	77.0	8.48	5.08	0.83	0.25	77.2	0.08		
BR-14-22	228.00	229.00	1.00	73.0	5.69	3.84	0.52	0.20	84.4	0.08		
BR-14-22	229.00	230.00	1.00	72.0	8.50	4.94	0.61	0.21	77.2	0.06		
BR-14-22	230.00	231.00	1.00	73.0	9.36	4.55	0.46	0.24	79.0	0.04		
BR-14-22	231.00	232.00	1.00	67.0	7.38	4.82	0.51	0.24	80.2	0.04		
BR-14-22	232.00	233.00	1.00	70.0	7.33	5.32	0.66	0.28	77.3	0.05		
BR-14-22	233.00	234.00	1.00	64.0	6.09	5.26	0.39	0.31	84.4	0.04		
BR-14-22	234.00	235.00	1.00	56.0	6.87	4.61	0.4	0.24	79.6	0.04		
BR-14-22	235.00	236.00	1.00	75.0	5.48	5.15	0.51	0.38	79.7	0.07		
BR-14-22	236.00	237.00	1.00	81.0	9.12	5.49	0.43	0.27	76.6	0.04		
BR-14-22	237.00	238.00	1.00	82.0	10.46	6.00	0.52	0.29	72.2	0.04		
BR-14-22	238.00	239.00	1.00	90.0	13.64	7.31	0.37	0.32	67.1	0.07		
BR-14-22	239.00	240.00	1.00	116.0	16.05	9.50	0.48	0.51	60.1	0.10		
BR-14-22	240.00	241.00	1.00	129.0	15.22	10.82	0.48	0.62	50.3	0.09		
BR-14-22	241.00	242.00	1.00	143.0	13.57	12.66	0.50	0.63	55.8	0.11		



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)			
BR-14-22	242.00	243.00	1.00	160.0	14.00	9.03	2.50	0.41	60.2	0.13			
BR-14-22	243.00	244.00	1.00	139.0	16.82	10.89	0.89	0.56	52.4	0.10			
BR-14-22	244.00	245.00	1.00	104.0	15.49	7.98	1.33	0.47	62.1	0.12			
BR-14-22	245.00	246.00	1.00	141.0	15.26	9.66	1.01	0.72	55.3	0.09			
BR-14-22	246.00	247.00	1.00	123.0	14.83	8.44	1.02	0.41	59.4	0.07			
BR-14-22	247.00	248.00	1.00	191.0	17.97	14.02	1.83	0.95	38.8	0.20			
BR-14-22	248.00	249.00	1.00	352.0	17.81	24.06	2.10	2.10	25.2	0.19			
BR-14-22	249.00	249.80	0.80	400.0	20.54	29.09	3.35	3.44	8.3	0.11			
BR-14-22	249.80	250.70	0.90	99.0	9.32	5.17	1.25	0.40	73.9	0.09			
BR-14-22	250.70	251.80	1.10	431.0	25.78	10.18	3.24	0.89	30.6	0.28			
BR-14-22	251.80	252.40	0.60	90.0	2.09	1.13	0.47	0.10	9.2	0.03			
BR-14-22	252.40	253.60	1.20	161.0	4.97	4.80	0.87	7.45	10.3	0.64			
BR-14-22	253.60	255.00	1.40	97.0	2.38	1.86	3.66	0.23	2.9	0.09			
BR-14-22	255.00	257.00	2.00	43.0	1.86	0.672	0.56	0.54	<1.0	0.27			
BR-14-22	257.00	259.00	2.00	28.0	1.20	0.379	0.38	0.23	2.4	0.10			
BR-14-22	259.00	261.00	2.00	32.0	0.70	1.50	0.21	0.07	2.7	0.03			
BR-14-22	261.00	262.00	1.00	53.0	1.60	1.31	0.17	0.08	6.1	0.03			
BR-14-22	262.00	264.00	2.00	4.0	0.09	0.03	0.05	0.01	<1.0	0.01			
BR-14-22	264.00	266.00	2.00	3.0	0.67	0.07	0.02	0.01	<1.0	0.01			
BR-14-22	266.00	267.50	1.50	3.0	0.19	0.08	0.03	0.01	<1.0	0.01			
BR-14-22	267.50	269.00	1.50	4.0	0.52	0.27	0.04	0.06	1.1	0.03			
BR-14-22	269.00	270.50	1.50	3.0	0.17	0.21	0.05	<0.01	5.5	0.01			
BR-14-22	270.50	272.50	2.00	12.0	1.55	0.73	0.10	0.05	3.7	0.07			
BR-14-22	272.50	274.00	1.50	1.0	0.16	0.04	0.05	<0.01	<1.0	0.01			
BR-14-22	274.00	275.50	1.50	3.0	0.32	0.13	0.03	<0.01	<1.0	0.02			
BR-14-22	275.50	277.00	1.50	<1.0	0.07	<0.01	0.03	<0.01	<1.0	0.01			
BR-14-22	277.00	278.50	1.50	<1.0	0.45	0.02	0.05	<0.01	1.4	0.01			
BR-14-22	278.50	279.50	1.00	19.0	3.69	0.97	0.16	0.34	5.8	0.38			
BR-14-22	279.50	281.50	2.00	<1.0	0.04	0.01	0.02	<0.01	<1.0	0.01			
BR-14-22	281.50	283.00	1.50	<1.0	0.60	0.11	0.04	<0.01	<1.0	0.01			
BR-14-22	283.00	284.40	1.40	<1.0	0.11	0.01	<0.01	<0.01	<1.0	0.01			
BR-15-22	0.00	118.90	118.90	Interval not sampled									
BR-15-22	118.90	120.80	1.90	<1.0	0.03	0.08	0.02	<0.01	<1.0	0.01			
BR-15-22	120.80	122.50	1.70	89.0	0.10	4.84	0.14	0.61	<1.0	0.17			
BR-15-22	122.50	123.80	1.30	6.0	<0.01	0.33	0.03	0.01	<1.0	0.01			
BR-15-22	123.80	125.80	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	125.80	127.40	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	127.40	129.00	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	129.00	131.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	131.00	133.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	133.00	134.80	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	134.80	136.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	136.00	138.00	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	138.00	139.90	1.90	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01			
BR-15-22	139.90	141.40	1.50	3.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01			
BR-15-22	141.40	142.60	1.20	4.0	0.05	0.024	0.05	<0.01	<1.0	0.01			
BR-15-22	142.60	144.00	1.40	14.0	0.20	0.12	0.15	0.06	2.0	0.02			
BR-15-22	144.00	145.40	1.40	34.0	4.04	0.80	0.29	0.06	4.5	0.02			
BR-15-22	145.40	147.00	1.60	<1.0	0.05	0.02	0.07	<0.01	1.0	<0.01			
BR-15-22	147.00	149.00	2.00	13.0	0.10	0.33	0.27	0.11	<1.0	0.08			
BR-15-22	149.00	151.00	2.00	3.0	0.16	0.08	0.07	0.01	<1.0	0.01			
BR-15-22	151.00	153.00	2.00	4.0	0.74	0.25	0.15	0.01	2.9	0.01			
BR-15-22	153.00	155.00	2.00	15.0	1.43	0.55	0.13	0.07	2.9	0.02			
BR-15-22	155.00	157.00	2.00	18.0	1.11	0.78	0.18	0.12	1.4	0.04			
BR-15-22	157.00	159.00	2.00	<1.0	0.04	0.02	0.05	<0.01	<1.0	<0.01			
BR-15-22	159.00	161.00	2.00	4.0	0.70	0.28	0.10	0.02	<1.0	0.02			



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)		
BR-15-22	161.00	161.60	0.60	51.0	10.49	4.72	0.17	0.49	<1.0	0.29		
BR-15-22	161.60	163.00	1.40	1.0	0.19	0.08	0.06	<0.01	<1.0	0.01		
BR-15-22	163.00	165.00	2.00	7.0	0.33	0.29	0.07	0.09	<1.0	0.07		
BR-15-22	165.00	167.00	2.00	26.0	1.68	0.69	0.11	0.18	<1.0	0.09		
BR-15-22	167.00	169.00	2.00	3.0	0.34	0.15	0.08	0.01	<1.0	0.01		
BR-15-22	169.00	171.00	2.00	3.0	0.29	0.07	0.09	0.02	<1.0	0.03		
BR-15-22	171.00	173.00	2.00	2.0	0.32	0.07	0.11	<0.01	<1.0	<0.01		
BR-15-22	173.00	175.00	2.00	4.0	0.35	0.09	0.09	0.03	<1.0	0.02		
BR-15-22	175.00	176.50	1.50	4.0	0.15	0.06	0.05	0.01	<1.0	0.02		
BR-15-22	176.50	178.30	1.80	1.0	1.22	0.17	0.01	<0.01	<1.0	0.15		
BR-15-22	178.30	179.70	1.40	<1.0	0.03	0.05	0.02	0.01	3.3	0.04		
BR-15-22	179.70	215.10	35.40	Interval not sampled								
BR-15-22	215.10	216.60	1.50	<1.0	0.03	0.08	<0.01	0.02	<1.0	0.01		
BR-15-22	216.60	217.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01		
BR-15-22	217.60	219.00	1.40	<1.0	0.03	0.05	0.01	0.01	1.0	0.01		
BR-15-22	219.00	220.50	1.50	<1.0	0.01	0.01	0.01	<0.01	<1.0	<0.01		
BR-15-22	220.50	221.20	0.70	<1.0	0.02	0.06	0.03	0.03	<1.0	0.01		
BR-15-22	221.20	222.00	0.80	698.0	1.64	2.93	1.27	0.40	83.2	0.12		
BR-15-22	222.00	223.00	1.00	575.0	3.4	2.56	1.21	0.29	82.5	0.12		
BR-15-22	223.00	224.00	1.00	700.0	4.11	2.58	0.93	0.24	82.8	0.12		
BR-15-22	224.00	225.00	1.00	368.0	3.32	2.43	0.70	0.12	83.5	0.06		
BR-15-22	225.00	226.00	1.00	188.0	6.29	3.31	1.02	0.10	84.8	0.06		
BR-15-22	226.00	227.00	1.00	214.0	4.09	3.31	0.76	0.11	84.4	0.05		
BR-15-22	227.00	228.00	1.00	324.0	6.11	4.37	0.88	0.19	81.3	0.08		
BR-15-22	228.00	229.00	1.00	202.0	1.71	1.84	0.68	0.08	90.5	0.04		
BR-15-22	229.00	230.00	1.00	391.0	4.54	4.23	1.25	0.21	83.5	0.02		
BR-15-22	230.00	231.00	1.00	341.0	3.72	3.99	1.97	0.22	84.4	0.02		
BR-15-22	231.00	232.00	1.00	283.0	4.00	2.67	1.43	0.15	84.9	0.03		
BR-15-22	232.00	233.00	1.00	170.0	1.90	2.06	1.43	0.10	88.8	0.01		
BR-15-22	233.00	234.00	1.00	614.0	1.67	2.24	3.76	0.28	88.1	0.02		
BR-15-22	234.00	235.00	1.00	805.0	5.93	2.85	2.77	0.34	80.3	0.04		
BR-15-22	235.00	235.90	0.90	395.0	5.70	2.37	2.10	0.22	81.5	0.10		
BR-15-22	235.90	236.80	0.90	325.0	6.37	3.45	1.92	0.22	79.9	0.09		
BR-15-22	236.80	238.00	1.20	473.0	6.18	1.74	3.14	0.27	82.5	0.13		
BR-15-22	238.00	239.00	1.00	127.0	8.42	3.24	1.73	0.22	81.0	0.06		
BR-15-22	239.00	239.80	0.80	175.0	8.38	3.85	2.83	0.32	81.9	0.05		
BR-15-22	239.80	241.00	1.20	128.0	11.81	5.17	1.88	0.41	73.5	0.02		
BR-15-22	241.00	242.00	1.00	95.0	12.97	5.15	0.73	0.40	70.1	0.04		
BR-15-22	242.00	242.80	0.80	161.0	22.38	9.92	1.05	0.71	41.1	0.06		
BR-15-22	242.80	243.50	0.70	7.0	0.28	0.19	0.10	0.03	<1.0	0.02		
BR-15-22	243.50	245.00	1.50	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.01		
BR-15-22	245.00	247.00	2.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01		
BR-15-22	247.00	249.00	2.00	<1.0	0.13	0.01	0.03	<0.01	<1.0	<0.01		
BR-15-22	249.00	251.00	2.00	<1.0	0.17	0.01	0.02	<0.01	<1.0	<0.01		
BR-15-22	251.00	253.00	2.00	<1.0	0.01	0.01	0.01	<0.01	<1.0	<0.01		
BR-15-22	253.00	255.00	2.00	<1.0	0.04	0.02	0.03	0.02	<1.0	0.01		
BR-15-22	255.00	257.00	2.00	<1.0	0.01	0.08	0.02	<0.01	<1.0	<0.01		
BR-15-22	257.00	259.00	2.00	<1.0	0.03	0.01	0.06	0.03	<1.0	0.02		
BR-15-22	259.00	261.00	2.00	5.0	0.43	0.14	0.10	0.06	<1.0	0.02		
BR-15-22	261.00	263.00	2.00	7.0	0.28	0.04	0.14	0.11	<1.0	0.029		
BR-16-22	0.00	128.00	128.00	Interval not sampled								
BR-16-22	128.00	129.50	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03		
BR-16-22	129.50	130.80	1.30	<1.0	<0.01	0.02	0.02	0.01	<1.0	0.03		
BR-16-22	130.80	132.40	1.60	<1.0	0.01	0.04	<0.01	0.02	<1.0	0.04		
BR-16-22	132.40	133.80	1.40	<1.0	0.02	0.087	0.06	0.02	<1.0	0.03		
BR-16-22	133.80	135.00	1.20	<1.0	0.05	0.10	0.02	<0.01	<1.0	0.04		



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)			
BR-16-22	135.00	135.50	0.50	<1.0	0.06	0.06	0.02	0.01	<1.0	0.04			
BR-16-22	135.50	136.50	1.00	7.0	0.53	0.14	0.05	0.01	<1.0	0.03			
BR-16-22	136.50	137.00	0.50	20.0	1.03	0.22	0.14	0.01	<1.0	0.03			
BR-16-22	137.00	138.00	1.00	12.0	0.50	0.12	0.11	<0.01	<1.0	0.03			
BR-16-22	138.00	139.00	1.00	6.0	0.30	0.06	0.06	<0.01	<1.0	0.03			
BR-16-22	139.00	139.50	0.50	6.0	0.66	0.09	0.14	<0.01	4.0	0.19			
BR-16-22	139.50	141.00	1.50	<1.0	0.06	0.01	0.04	<0.01	<1.0	0.01			
BR-16-22	141.00	143.00	2.00	<1.0	0.05	0.07	0.01	<0.01	<1.0	0.01			
BR-16-22	143.00	204.00	61.00	Interval not sampled									
BR-16-22	204.00	206.00	2.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01			
BR-16-22	206.00	208.00	2.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01			
BR-16-22	208.00	210.10	2.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01			
BR-16-22	210.10	211.10	1.00	<1.0	0.03	0.03	0.04	0.02	3.2	<0.01			
BR-16-22	211.10	211.90	0.80	3.0	<0.01	0.19	0.2	<0.01	80.8	<0.01			
BR-16-22	211.90	212.60	0.70	14.0	<0.01	0.26	0.48	<0.01	92.9	<0.01			
BR-16-22	212.60	213.30	0.70	984.0	0.98	5.08	0.96	0.53	84.9	0.10			
BR-16-22	213.30	214.10	0.80	1092.0	3.11	6.66	2.24	0.72	71.5	0.14			
BR-16-22	214.10	215.00	0.90	201.0	2.17	3.04	0.75	0.13	86.1	0.02			
BR-16-22	215.00	216.00	1.00	243.0	3.45	2.95	0.59	0.14	85.8	0.02			
BR-16-22	216.00	217.00	1.00	342.0	5.97	4.00	1.34	0.21	82.9	0.07			
BR-16-22	217.00	218.00	1.00	521.0	4.73	3.68	1.79	0.29	80.8	0.06			
BR-16-22	218.00	219.00	1.00	386.0	7.97	4.72	3.36	0.49	73.9	0.09			
BR-16-22	219.00	219.60	0.60	309.0	2.27	2.72	1.82	0.32	85.5	0.01			
BR-16-22	219.60	220.40	0.80	146.0	2.91	3.86	1.76	0.26	80.9	0.01			
BR-16-22	220.40	221.00	0.60	803.0	9.92	11.2	4.69	1.35	54.3	0.41			
BR-16-22	221.00	222.00	1.00	717.0	15.91	20.08	5.45	2.26	27.4	0.78			
BR-16-22	222.00	222.60	0.60	719.0	12.62	12.73	5.46	1.30	44.2	0.83			
BR-16-22	222.60	223.10	0.50	342.0	7.49	3.53	3.01	0.29	69.9	0.23			
BR-16-22	223.10	224.10	1.00	201.0	4.24	1.33	0.98	0.19	14.0	0.15			
BR-16-22	224.10	225.10	1.00	11.0	0.73	0.37	0.37	0.09	<1.0	0.05			
BR-16-22	225.10	226.00	0.90	20.0	1.16	0.66	0.19	0.06	3.6	0.04			
BR-16-22	226.00	227.00	1.00	19.0	0.42	0.11	0.23	<0.01	3.7	0.01			
BR-16-22	227.00	228.00	1.00	14.0	0.33	0.14	0.22	0.01	9.1	0.01			
BR-16-22	228.00	229.00	1.00	100.0	1.36	0.43	0.27	0.05	5.3	0.03			
BR-16-22	229.00	230.00	1.00	29.0	0.27	0.08	0.24	0.02	1.9	0.01			
BR-16-22	230.00	231.00	1.00	9.0	0.27	0.09	0.34	<0.01	<1.0	<0.01			
BR-16-22	231.00	232.00	1.00	27.0	0.68	0.28	0.25	0.02	1.8	0.02			
BR-16-22	232.00	233.00	1.00	4.0	0.32	0.06	0.12	<0.01	2.9	0.01			
BR-16-22	233.00	234.00	1.00	4.0	0.15	0.07	0.11	<0.01	<1.0	0.01			
BR-16-22	234.00	235.00	1.00	10.0	0.42	0.18	0.10	0.01	<1.0	0.01			
BR-16-22	235.00	236.00	1.00	2.0	0.04	0.03	0.09	<0.01	<1.0	<0.01			
BR-16-22	236.00	236.50	0.50	3.0	0.39	0.07	0.10	<0.01	<1.0	<0.01			
BR-16-22	236.50	237.00	0.50	2.0	0.07	0.05	0.07	<0.01	<1.0	<0.01			
BR-16-22	237.00	238.00	1.00	4.0	0.64	0.22	0.11	<0.01	<1.0	0.01			
BR-16-22	238.00	238.80	0.80	8.0	0.59	0.22	0.14	0.03	5.1	0.02			
BR-16-22	238.80	239.30	0.50	3.0	0.39	0.08	0.11	<0.01	3.8	<0.01			
BR-16-22	239.30	240.00	0.70	<1.0	0.01	0.04	0.04	<0.01	0.4	<0.01			
BR-16-22	240.00	241.00	1.00	<1.0	0.04	0.04	0.04	<0.01	<1.0	<0.01			
BR-16-22	241.00	242.00	1.00	<1.0	0.08	0.02	0.05	<0.01	4.4	<0.01			
BR-16-22	242.00	243.00	1.00	8.0	1.48	0.88	0.07	<0.01	15.3	0.01			
BR-16-22	243.00	244.00	1.00	<1.0	0.05	0.01	0.03	<0.01	<1.0	<0.01			
BR-16-22	244.00	245.00	1.00	<1.0	0.12	0.01	0.04	<0.01	<1.0	<0.01			
BR-16-22	245.00	246.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01			
BR-16-22	246.00	247.00	1.00	<1.0	0.12	0.03	0.03	<0.01	1.2	0.01			
BR-16-22	247.00	248.00	1.00	<1.0	0.14	0.01	0.03	<0.01	<1.0	0.01			
BR-16-22	248.00	249.00	1.00	<1.0	0.06	<0.01	0.05	<0.01	<1.0	<0.01			



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-16-22	249.00	250.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	250.00	251.00	1.00	<1.0	0.01	<0.01	0.01	0.01	<1.0	0.02
BR-16-22	251.00	252.00	1.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	0.01
BR-16-22	252.00	252.50	0.50	<1.0	0.06	0.01	0.03	<0.01	<1.0	0.01
BR-16-22	252.50	253.50	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-16-22	253.50	254.50	1.00	<1.0	0.10	0.02	0.05	<0.01	1.7	<0.01
BR-16-22	254.50	255.00	0.50	3.0	0.52	0.12	0.08	<0.01	3.0	0.01
BR-16-22	255.00	256.00	1.00	1.0	0.16	0.02	0.16	<0.01	<1.0	0.01
BR-16-22	256.00	256.60	0.60	2.0	0.11	0.05	0.04	0.01	1.4	0.01
BR-16-22	256.60	257.40	0.80	2.0	0.15	0.08	0.04	<0.01	1.6	0.01
BR-16-22	257.40	258.40	1.00	<1.0	0.07	0.03	0.07	<0.01	<1.0	0.01
BR-16-22	258.40	259.20	0.80	<1.0	0.03	0.02	0.05	<0.01	<1.0	0.01
BR-16-22	259.20	260.20	1.00	<1.0	0.03	0.04	0.05	<0.01	<1.0	0.01
BR-16-22	260.20	261.20	1.00	<1.0	0.03	0.01	0.07	<0.01	<1.0	0.01
BR-16-22	261.20	262.20	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-16-22	262.20	263.00	0.80	3.0	0.47	0.08	0.10	0.01	<1.0	0.01
BR-16-22	263.00	264.00	1.00	18.0	0.33	0.16	0.16	0.05	<1.0	0.04
BR-16-22	264.00	265.00	1.00	2.0	0.37	0.11	0.13	<0.01	3.3	0.01
BR-16-22	265.00	266.00	1.00	3.0	0.58	0.04	0.22	<0.01	2.9	0.01
BR-16-22	266.00	266.60	0.60	<1.0	0.66	0.02	0.06	<0.01	3.8	<0.01
BR-16-22	266.60	267.60	1.00	<1.0	0.08	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	267.60	269.00	1.40	<1.0	0.11	0.02	0.01	<0.01	<1.0	0.02
BR-16-22	269.00	270.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	270.00	271.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	271.00	272.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	272.00	273.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	273.00	274.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	274.00	275.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-16-22	275.00	276.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-16-22	276.00	278.00	2.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-16-22	278.00	307.50	29.50	Interval not sampled						
BR-16-22	307.50	308.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	308.50	309.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	309.50	310.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	310.50	311.00	0.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-16-22	311.00	312.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-16-22	312.00	312.50	0.50	27.0	1.23	2.49	0.28	0.41	<1.0	0.14
BR-16-22	312.50	313.50	1.00	<1.0	0.02	0.01	0.08	<0.01	<1.0	<0.01
BR-16-22	313.50	314.50	1.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-16-22	314.50	315.50	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-16-22	315.50	316.50	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	316.50	317.50	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	317.50	318.50	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-16-22	318.50	319.50	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-16-22	319.50	321.00	1.50	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-16-22	321.00	322.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	0.00	113.00	113.00	Interval not sampled						
BR-18-22	113.00	114.00	1.00	<1.0	<0.01	0.04	<0.01	0.05	<1.0	0.04
BR-18-22	114.00	115.20	1.20	<1.0	0.03	0.01	<0.01	<0.01	<1.0	0.04
BR-18-22	115.20	116.00	0.80	<1.0	0.02	0.54	<0.01	0.02	<1.0	0.02
BR-18-22	116.00	117.00	1.00	<1.0	0.21	0.18	<0.01	0.02	<1.0	0.01
BR-18-22	117.00	117.90	0.90	<1.0	0.08	0.09	<0.01	<0.01	<1.0	0.01
BR-18-22	117.90	119.00	1.10	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	119.00	119.40	0.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	119.40	121.20	1.80	<1.0	0.01	0.18	<0.01	0.01	<1.0	0.01
BR-18-22	121.20	122.70	1.50	<1.0	0.03	0.02	<0.01	<0.01	<1.0	0.02



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-18-22	122.70	126.30	3.60	6.0	0.02	0.03	<0.01	<0.01	<1.0	0.02
BR-18-22	128.80	130.80	2.00	12.0	0.37	0.30	0.06	0.27	<1.0	0.13
BR-18-22	130.80	131.30	0.50	6.0	0.01	0.16	0.06	0.03	19.9	0.02
BR-18-22	131.30	132.00	0.70	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	132.00	133.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	133.00	134.50	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	134.50	136.00	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	136.00	137.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	137.00	138.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	138.00	139.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	139.00	140.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	140.00	141.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	141.00	142.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	142.00	143.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	143.00	144.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	144.00	145.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	145.00	146.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	146.00	146.60	0.60	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	146.60	147.00	0.40	3.0	0.05	0.02	<0.01	<0.01	<1.0	<0.01
BR-18-22	147.00	147.90	0.90	9.0	0.08	0.02	0.03	<0.01	<1.0	<0.01
BR-18-22	147.90	149.00	1.10	11.0	0.11	0.07	<0.01	<0.01	<1.0	<0.01
BR-18-22	149.00	149.8	0.80	5.0	0.05	0.08	<0.01	<0.01	<1.0	0.01
BR-18-22	149.80	150.50	0.70	<1.0	0.01	0.05	0.03	<0.01	<1.0	<0.01
BR-18-22	150.50	151.00	0.50	2.0	0.06	0.03	0.04	<0.01	1	0.01
BR-18-22	151.00	151.80	0.80	7.0	0.32	0.07	0.06	0.01	<1.0	0.02
BR-18-22	151.80	152.80	1.00	2.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	152.80	154.00	1.20	9.0	0.71	0.30	0.08	0.01	1.4	0.01
BR-18-22	154.00	154.80	0.80	<1.0	0.03	0.02	0.18	<0.01	<1	<0.01
BR-18-22	154.80	155.80	1.00	2.0	0.07	0.04	0.07	<0.01	1.4	<0.01
BR-18-22	155.80	156.80	1.00	4.0	0.07	0.02	0.06	<0.01	<1.0	<0.01
BR-18-22	156.80	157.80	1.00	32.0	0.21	0.09	0.10	0.03	1.2	0.01
BR-18-22	157.80	158.80	1.00	2.0	0.06	0.06	0.41	<0.01	<1.0	<0.01
BR-18-22	158.80	159.80	1.00	5.0	0.23	0.07	0.06	0.02	1.2	0.01
BR-18-22	159.80	160.50	0.70	3.0	0.01	0.06	0.06	0.02	<1.0	0.02
BR-18-22	160.50	161.50	1.00	35.0	0.07	0.16	0.04	0.09	<1.0	0.07
BR-18-22	161.50	162.50	1.00	3.0	0.02	0.01	0.04	0.01	<1.0	0.01
BR-18-22	162.50	163.50	1.00	3.0	0.03	0.04	0.02	0.01	<1.0	0.01
BR-18-22	163.50	164.50	1.00	<1.0	0.05	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	164.50	165.50	1.00	4.0	0.10	0.02	0.04	<0.01	<1.0	<0.01
BR-18-22	165.50	166.50	1.00	<1.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	166.50	167.50	1.00	<1.0	0.06	0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	167.50	168.00	0.50	47.0	0.32	0.14	0.04	0.27	<1.0	0.10
BR-18-22	168.00	168.80	0.80	1.0	0.04	0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	168.80	169.50	0.70	29.0	0.07	0.08	0.03	0.11	<1.0	0.06
BR-18-22	169.50	170.50	1.00	<1.0	0.01	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	170.50	171.50	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	171.50	172.40	0.90	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	172.40	172.80	0.40	2.0	0.06	0.15	0.02	<0.01	<1.0	<0.01
BR-18-22	172.80	173.80	1.00	2.0	0.11	0.03	0.02	<0.01	<1.0	<0.01
BR-18-22	173.80	174.60	0.80	<1.0	0.04	0.03	0.04	<0.01	<1.0	<0.01
BR-18-22	174.60	175.60	1.00	<1.0	0.03	0.03	0.04	<0.01	<1.0	<0.01
BR-18-22	175.60	176.50	0.90	<1.0	0.01	0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	176.50	176.90	0.40	<1.0	0.02	0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	176.90	177.50	0.60	480.0	1.82	0.17	0.12	0.21	<1.0	0.06
BR-18-22	177.50	178.50	1.00	64.0	0.28	0.70	0.05	0.02	<1.0	0.01
BR-18-22	178.50	179.20	0.70	2.0	0.11	0.05	0.02	<0.01	1.7	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-18-22	179.20	179.80	0.60	20.0	0.39	0.12	0.05	<0.01	<1.0	0.01
BR-18-22	179.80	180.80	1.00	2.0	0.06	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	180.80	181.70	0.90	8.0	0.20	0.04	0.04	<0.01	<1.0	<0.01
BR-18-22	181.70	182.50	0.80	<1.0	0.04	<0.01	0.01	<0.01	1.5	<0.01
BR-18-22	182.50	183.50	1.00	<1.0	0.08	0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	183.50	184.50	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	184.50	185.50	1.00	<1.0	0.11	0.02	0.02	<0.01	<1.0	<0.01
BR-18-22	185.50	186.30	0.80	20.0	0.08	0.02	0.03	0.02	<1.0	0.01
BR-18-22	186.30	187.30	1.00	3.0	0.02	0.01	0.02	0.01	<1.0	<0.01
BR-18-22	187.30	188.00	0.70	133.0	0.61	0.29	0.04	0.22	<1.0	0.12
BR-18-22	188.00	188.50	0.50	384.0	0.98	0.62	0.04	0.38	<1.0	0.12
BR-18-22	188.50	189.50	1.00	2.0	0.11	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	189.50	190.50	1.00	<1.0	0.05	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	190.50	191.50	1.00	110	0.13	0.02	0.03	0.06	<1.0	0.04
BR-18-22	191.50	192.50	1.00	3.0	0.13	0.04	0.05	<0.01	<1.0	<0.01
BR-18-22	192.50	193.30	0.80	5.0	0.15	0.11	0.09	0.02	<1.0	0.02
BR-18-22	193.30	194.00	0.70	<1.0	0.05	0.03	<0.01	<0.01	<1.0	<0.01
BR-18-22	194.00	195.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	195.00	196.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	196.00	196.70	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	196.70	197.70	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	197.70	198.70	1.00	<1.0	0.02	0.02	<0.01	<0.01	<1.0	0.02
BR-18-22	198.70	199.20	0.50	<1.0	0.05	0.15	<0.01	0.02	1.2	0.04
BR-18-22	199.20	200.80	1.60	<1.0	0.01	0.07	0.03	0.01	<1.0	0.04
BR-18-22	200.80	201.80	1.00	<1.0	0.12	0.30	0.06	0.02	11.1	0.10
BR-18-22	201.80	202.80	1.00	<1.0	0.14	0.07	0.05	0.01	2.3	0.03
BR-18-22	202.80	203.80	1.00	<1.0	0.10	0.04	<0.01	<0.01	<1.0	0.01
BR-18-22	203.80	204.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	204.80	205.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	205.80	206.70	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	206.70	207.70	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	207.70	208.70	1.00	<1.0	<0.01	0.01	0.01	<0.01	1.1	0.01
BR-18-22	208.70	209.60	0.90	4.0	0.11	0.32	0.10	0.02	19.4	0.04
BR-18-22	209.60	210.30	0.70	3.0	0.19	0.31	0.08	0.02	25.1	0.10
BR-18-22	210.30	211.00	0.70	<1.0	<0.01	0.01	0.02	<0.01	<1.0	0.01
BR-18-22	211.00	212.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	212.00	212.80	0.80	<1.0	0.03	0.02	<0.01	<0.01	<1.0	0.02
BR-18-22	212.80	213.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	213.80	214.80	1.00	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	0.01
BR-18-22	214.80	215.80	1.00	2.0	0.01	0.01	0.01	<0.01	<1.0	0.01
BR-18-22	215.80	216.60	0.80	3.0	0.30	0.25	0.04	<0.01	<1.0	0.03
BR-18-22	216.60	217.10	0.50	6.0	0.63	0.42	0.16	0.03	2.4	0.04
BR-18-22	217.10	217.90	0.80	33.0	1.53	0.82	0.16	0.04	40.8	0.07
BR-18-22	217.90	218.80	0.90	<1.0	0.50	0.15	<0.01	0.01	<1.0	0.02
BR-18-22	218.80	219.70	0.90	3.0	0.80	0.19	0.05	0.01	12.0	0.06
BR-18-22	219.70	220.70	1.00	66.0	1.45	1.57	0.25	0.06	37.4	0.07
BR-18-22	220.70	221.70	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-18-22	221.70	222.20	0.50	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-18-22	222.20	223.20	1.00	3.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	223.20	224.20	1.00	2.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	224.20	226.20	2.00	3.0	0.02	0.04	0.02	<0.01	<1.0	<0.01
BR-18-22	226.20	226.90	0.70	6.0	0.05	0.03	0.05	<0.01	<1.0	<0.01
BR-18-22	226.90	227.80	0.90	5.0	0.07	0.03	<0.01	<0.01	<1.0	<0.01
BR-18-22	227.80	228.80	1.00	<1.0	0.08	0.02	<0.01	<0.01	<1.0	<0.01
BR-18-22	228.80	229.80	1.00	<1.0	0.11	0.03	<0.01	<0.01	<1.0	<0.01
BR-18-22	229.80	230.30	0.50	<1.0	0.09	0.06	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-18-22	230.30	230.90	0.60	<1.0	0.07	0.02	<0.01	<0.01	<1.0	0.01
BR-18-22	230.90	231.90	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	231.90	232.40	0.50	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	232.40	233.40	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	233.40	234.40	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	234.40	234.90	0.50	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-18-22	234.90	235.60	0.70	<1.0	0.13	0.02	<0.01	<0.01	<1.0	0.01
BR-18-22	235.60	236.60	1.00	7.0	0.13	0.32	0.27	0.01	22.3	0.02
BR-18-22	236.60	237.20	0.60	103.0	2.48	1.60	0.99	0.14	79.8	0.08
BR-18-22	237.20	238.00	0.80	188.0	5.32	2.84	0.78	0.15	81.9	0.06
BR-18-22	238.00	239.00	1.00	234.0	5.32	3.81	1.06	0.15	82.1	0.06
BR-18-22	239.00	240.00	1.00	189.0	4.57	3.66	0.55	0.14	76.4	0.05
BR-18-22	240.00	241.00	1.00	209.0	5.8	3.94	0.97	0.15	79.7	0.05
BR-18-22	241.00	242.00	1.00	117.0	3.82	2.18	0.72	0.10	69.2	0.03
BR-18-22	242.00	243.00	1.00	61.0	1.96	0.87	0.92	0.05	83.5	0.02
BR-18-22	243.00	244.00	1.00	14.0	0.15	2.99	1.25	0.02	87.3	<0.01
BR-18-22	244.00	245.00	1.00	35.0	0.22	1.57	1.28	0.13	89.9	0.01
BR-18-22	245.00	246.00	1.00	10.0	0.76	1.22	1.66	0.02	86.9	<0.01
BR-18-22	246.00	247.00	1.00	6.0	0.38	0.80	0.80	0.01	82.1	<0.01
BR-18-22	247.00	248.00	1.00	6.0	0.62	0.90	0.99	<0.01	81.8	<0.01
BR-18-22	248.00	249.20	1.20	48.0	0.58	1.61	1.51	0.08	81.2	<0.01
BR-18-22	249.20	249.90	0.70	2.0	0.07	0.04	0.12	<0.01	1.2	0.02
BR-18-22	249.90	250.70	0.80	1.0	0.12	0.04	0.01	<0.01	<1.0	0.02
BR-18-22	250.70	251.50	0.80	<1.0	0.08	<0.01	0.01	<0.01	1.7	<0.01
BR-18-22	251.50	252.00	0.50	<1.0	0.06	<0.01	0.08	<0.01	4.3	<0.01
BR-18-22	252.00	253.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	1.1	<0.01
BR-18-22	253.00	254.00	1.00	<1.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	254.00	255.00	1.00	7.0	0.11	0.16	<0.01	<0.01	<1.0	<0.01
BR-18-22	255.00	256.00	1.00	22.0	0.09	0.10	<0.01	0.01	<1.0	0.01
BR-18-22	256.00	257.00	1.00	45.0	0.01	0.01	<0.01	0.01	<1.0	0.01
BR-18-22	257.00	258.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	258.00	259.00	1.00	<1.0	0.01	0.03	0.020	<0.01	1.5	<0.01
BR-18-22	259.00	260.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	260.00	261.00	1.00	16.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	261.00	262.00	1.00	6.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	262.00	263.00	1.00	90.0	0.03	0.01	<0.01	0.01	<1.0	0.01
BR-18-22	263.00	264.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	264.00	265.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-18-22	265.00	266.00	1.00	<1.0	0.01	0.08	0.02	<0.01	<1.0	<0.01
BR-18-22	266.00	267.00	1.00	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	267.00	268.00	1.00	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	268.00	269.00	1.00	<1.0	0.01	0.01	0.03	<0.01	1.2	<0.01
BR-18-22	269.00	270.00	1.00	<1.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	270.00	271.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	271.00	272.00	1.00	<1.0	0.04	<0.01	0.03	<0.01	<1.0	0.01
BR-18-22	272.00	273.00	1.00	<1.0	<0.01	<0.01	0.08	<0.01	<1.0	<0.01
BR-18-22	273.00	274.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	274.00	275.00	1.00	<1.0	0.07	<0.01	0.06	<0.01	<1.0	<0.01
BR-18-22	275.00	276.00	1.00	<1.0	0.02	<0.01	0.06	<0.01	<1.0	<0.01
BR-18-22	276.00	277.00	1.00	<1.0	0.03	0.01	0.05	<0.01	<1.0	<0.01
BR-18-22	277.00	278.00	1.00	<1.0	0.06	0.02	0.06	0.02	<1.0	<0.01
BR-18-22	278.00	279.00	1.00	<1.0	0.11	0.03	0.07	<0.01	1.4	<0.01
BR-18-22	279.00	280.00	1.00	<1.0	<0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-18-22	280.00	281.00	1.00	<1.0	0.16	0.05	0.13	<0.01	<1.0	<0.01
BR-18-22	281.00	282.00	1.00	<1.0	<0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-18-22	282.00	283.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-18-22	283.00	284.00	1.00	<1.0	<0.01	<0.01	0.31	<0.01	<1.0	<0.01
BR-18-22	284.00	285.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-18-22	285.00	285.60	0.60	<1.0	0.15	0.01	0.06	<0.01	<1.0	<0.01
BR-18-22	285.60	286.00	0.40	8.0	2.48	0.33	0.10	0.04	<1.0	0.03
BR-18-22	286.00	286.80	0.80	7.0	0.62	0.24	0.04	0.03	1.3	0.01
BR-18-22	286.80	288.00	1.20	1.0	0.10	0.01	0.07	<0.01	<1.0	<0.01
BR-18-22	288.00	289.00	1.00	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	289.00	290.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	290.00	291.00	1.00	<1.0	0.03	<0.01	0.05	<0.01	<1.0	<0.01
BR-18-22	291.00	292.00	1.00	<1.0	0.09	0.01	0.05	<0.01	<1.0	<0.01
BR-18-22	292.00	293.00	1.00	<1.0	0.06	<0.01	0.04	<0.01	<1.0	<0.01
BR-18-22	293.00	294.00	1.00	<1.0	0.12	0.01	0.03	<0.01	1.1	<0.01
BR-18-22	294.00	295.00	1.00	<1.0	0.24	0.04	0.03	<0.01	<1.0	<0.01
BR-18-22	295.00	296.00	1.00	<1.0	0.08	0.01	0.02	<0.01	1.1	<0.01
BR-18-22	296.00	296.60	0.60	2.0	0.33	0.05	0.02	<0.01	1.2	<0.01
BR-18-22	296.60	298.00	1.40	13.0	0.02	<0.01	0.03	<0.01	1.1	<0.01
BR-18-22	298.00	299.00	1.00	<1.0	0.08	0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	299.00	300.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-18-22	300.00	301.80	1.80	<1.0	0.03		0.02	<0.01	<1.0	<0.01
BR-20-22	0.00	112.10	Interval not sampled							
BR-20-22	112.10	113.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	113.00	114.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	114.00	115.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	115.00	116.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	116.00	117.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	117.00	118.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	118.00	119.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	119.00	120.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	120.20	121.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	121.00	122.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	123.00	123.70	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	123.70	124.20	0.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	124.20	125.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	125.40	127.70	2.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	127.70	128.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	128.90	129.90	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	129.90	131.90	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	131.90	133.00	1.10	<1.0	0.02	0.02	<0.01	<0.01	<1.0	0.01
BR-20-22	133.00	134.20	1.20	<1.0	0.01	0.02	<0.01	0.01	<1.0	0.01
BR-20-22	134.20	135.40	1.20	<1.0	0.01	0.02	<0.01	0.01	<1.0	0.02
BR-20-22	135.40	136.80	1.40	<1.0	<0.01	0.01	0.020	<0.01	<1.0	0.02
BR-20-22	136.80	137.70	0.90	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.02
BR-20-22	137.70	138.70	1.00	<1.0	0.01	0.08	<0.01	0.01	<1.0	0.04
BR-20-22	138.70	139.60	0.90	<1.0	0.01	0.19	0.07	0.03	<1.0	0.06
BR-20-22	139.60	140.10	0.50	<1.0	0.19	0.31	0.01	0.02	<1.0	0.07
BR-20-22	140.10	141.00	0.90	<1.0	0.04	0.02	<0.01	0.02	<1.0	0.06
BR-20-22	141.00	141.90	0.90	6.0	0.02	0.09	0.02	0.01	1.3	0.03
BR-20-22	141.90	142.70	0.80	7.0	0.16	0.27	0.39	0.11	1.6	0.11
BR-20-22	142.70	143.60	0.90	8.0	0.03	0.07	0.24	0.02	1.1	0.06
BR-20-22	143.60	144.10	0.50	40.0	0.34	0.27	0.13	0.56	11.9	5.17
BR-20-22	144.10	145.00	0.90	12.0	0.08	0.10	0.08	0.14	4.7	0.13
BR-20-22	145.00	145.50	0.50	<1.0	0.01	0.01	0.02	<0.01	1.4	0.02
BR-20-22	145.50	146.40	0.90	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-20-22	146.40	147.60	1.20	7.0	0.06	0.04	0.10	0.08	<1.0	0.09
BR-20-22	147.60	148.50	0.90	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-20-22	148.50	149.00	0.50	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-20-22	149.00	150.00	1.00	<1.0	0.02	<0.01	0.02	0.11	<1.0	0.08
BR-20-22	150.00	151.00	1.00	7.0	0.07	0.03	0.05	0.87	41.6	0.24
BR-20-22	151.00	152.00	1.00	9.0	0.18	0.19	0.02	0.44	26.1	0.24
BR-20-22	152.00	153.00	1.00	4.0	0.04	0.03	0.01	0.01	<1.0	0.02
BR-20-22	153.00	154.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	154.00	155.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	155.00	156.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	156.00	157.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	157.00	158.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-20-22	158.00	158.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	158.90	160.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	160.00	161.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	161.00	162.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	162.00	163.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	163.00	164.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	164.00	165.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	165.00	166.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	166.00	167.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	167.20	167.60	0.40	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.02
BR-20-22	167.60	168.30	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-20-22	168.30	169.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	169.40	170.50	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	170.50	171.50	1.00	<1.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-20-22	171.50	172.50	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	172.50	173.50	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	173.50	174.50	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	174.50	175.50	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	175.50	176.50	1.00	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	0.01
BR-20-22	176.50	177.00	0.50	<1.0	0.08	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	177.00	178.00	1.00	5.0	0.14	0.09	<0.01	<0.01	<1.0	<0.01
BR-20-22	178.00	179.00	1.00	8.0	0.18	0.12	<0.01	<0.01	1.3	0.01
BR-20-22	179.00	180.00	1.00	4.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-20-22	180.00	181.00	1.00	5.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	181.00	182.00	1.00	6.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-20-22	182.00	183.00	1.00	8.0	0.09	0.02	<0.01	<0.01	1.4	<0.01
BR-20-22	183.00	184.00	1.00	6.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	184.00	185.00	1.00	3.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	185.00	185.60	0.60	5.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	185.60	186.20	0.60	3.0	0.01	<0.01	<0.01	<0.01	3.2	<0.01
BR-20-22	186.20	187.00	0.80	<1.0	0.01	<0.01	<0.01	<0.01	1.1	<0.01
BR-20-22	187.00	188.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	188.00	189.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	189.00	190.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	1.1	<0.01
BR-20-22	190.00	191.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	1.2	<0.01
BR-20-22	191.20	192.00	0.80	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	192.00	193.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	193.20	194.00	0.80	<1.0	0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-20-22	194.00	195.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-20-22	196.00	197.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-20-22	197.00	198.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	198.00	199.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	199.00	200.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	200.00	201.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	201.00	202.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-20-22	202.00	203.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	203.00	204.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	204.00	204.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	204.90	205.40	0.50	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	205.40	206.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	206.40	207.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	207.40	208.00	0.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	208.00	209.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	209.00	210.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	210.00	211.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	211.00	212.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	212.00	213.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	213.00	214.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	214.00	215.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	215.00	216.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	216.00	217.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	217.00	218.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	218.00	219.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	219.00	220.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	220.00	221.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	221.00	222.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	222.00	223.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	223.00	224.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	224.00	225.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	225.00	226.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	226.00	227.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	227.00	228.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	228.00	229.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	229.00	230.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-20-22	230.00	231.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-20-22	231.00	232.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	232.00	233.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	233.00	234.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-20-22	234.00	235.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	235.00	236.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	236.00	237.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	237.00	238.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-20-22	238.00	239.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	239.00	240.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	240.00	241.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	241.00	242.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	242.00	243.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	243.00	244.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	244.00	245.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	245.00	246.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	246.00	247.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-20-22	247.10	247.70	0.60	8.0	0.02	0.04	<0.01	0.01	2.5	0.01
BR-20-22	247.70	248.10	0.40	530.0	5.87	3.95	0.41	0.16	82.8	0.08
BR-20-22	248.10	249.00	0.90	499.0	3.67	4.5	0.63	0.21	74.3	0.08
BR-20-22	249.00	250.00	1.00	164.0	1.57	3.3	0.30	0.07	90.2	0.02
BR-20-22	250.00	251.00	1.00	289.0	1.84	3.4	0.28	0.07	83.8	0.03
BR-20-22	251.00	252.20	1.20	584.0	2.08	4.37	0.35	0.11	86.1	0.06
BR-20-22	252.20	252.60	0.40	496.0	0.54	1.72	0.55	0.17	92.3	0.07
BR-20-22	252.60	253.20	0.60	486.0	0.10	0.17	0.20	0.16	97.4	0.04
BR-20-22	253.20	254.00	0.80	1517.0	1.82	4.25	0.68	0.30	87.8	0.07
BR-20-22	254.00	255.00	1.00	913.0	4.36	8.18	0.92	0.20	72.9	0.09



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-20-22	255.00	256.00	1.00	439.0	5.18	8.41	0.76	0.24	73.9	0.06
BR-20-22	256.00	257.00	1.00	186.0	8.57	3.95	1.32	0.22	79.0	0.03
BR-20-22	257.00	258.00	1.00	109.0	10.31	4.46	1.17	0.20	78.2	0.02
BR-20-22	258.00	259.00	1.00	102.0	6.98	2.61	0.65	0.17	79.5	0.02
BR-20-22	259.00	260.00	1.00	157.0	10.28	4.01	1.16	0.18	79.1	0.03
BR-20-22	260.00	261.00	1.00	161.0	9.65	4.05	1.56	0.18	79.3	0.02
BR-20-22	261.00	262.00	1.00	142.0	8.97	4.63	1.29	0.17	81.5	<0.01
BR-20-22	262.00	263.00	1.00	98.0	8.16	3.81	1.18	0.15	80.2	0.01
BR-20-22	263.00	264.00	1.00	77.0	8.85	3.85	0.98	0.15	82.4	0.01
BR-20-22	264.00	265.00	1.00	86.0	10.32	3.86	0.78	0.17	76.1	0.02
BR-20-22	265.00	266.00	1.00	90.0	12.77	4.76	0.77	0.24	75.1	0.02
BR-20-22	266.00	267.00	1.00	69.0	9.73	4.20	0.79	0.17	79.8	0.02
BR-20-22	267.00	268.00	1.00	69.0	12.19	4.74	0.54	0.22	75.6	0.02
BR-20-22	268.00	269.00	1.00	85.0	13.1	5.80	0.63	0.28	67.5	0.03
BR-20-22	269.00	270.00	1.00	88.0	13.55	6.16	0.51	0.26	66.9	0.03
BR-20-22	270.00	271.00	1.00	84.0	15.47	6.90	0.55	0.23	72.0	0.03
BR-20-22	271.00	272.00	1.00	127.0	18.96	9.50	0.77	0.38	56.1	0.04
BR-20-22	272.00	272.90	0.90	139.0	18.57	11.33	0.74	0.44	55.1	0.05
BR-20-22	272.90	274.00	1.10	268.0	25.86	25.44	1.19	1.36	26.5	0.14
BR-20-22	274.00	275.00	1.00	267.0	20.53	18.58	1.69	1.23	32.7	0.14
BR-20-22	275.00	276.20	1.20	457.0	24.58	15.35	3.05	1.89	27.4	0.20
BR-20-22	276.20	276.55	0.35	436.0	16.95	10.11	3.20	1.28	9.2	0.22
BR-20-22	276.55	277.30	0.75	616.0	8.63	34.90	0.61	4.90	9.3	0.54
BR-20-22	277.30	278.00	0.70	165.0	5.63	8.35	0.31	0.82	6.6	0.15
BR-20-22	278.00	279.20	1.20	5.0	0.09	0.12	0.04	0.03	<1.0	0.01
BR-20-22	279.20	280.00	0.80	<1.0	0.01	0.01	0.02	0.01	<1.0	0.01
BR-20-22	280.00	281.00	1.00	<1.0	0.12	0.02	<0.01	<0.01	<1.0	<0.01
BR-20-22	281.00	281.90	0.90	<1.0	0.01	0.01	0.02	0.01	<1.0	<0.01
BR-20-22	281.90	283.10	1.20	27.0	0.48	0.37	0.10	0.26	1.1	0.04
BR-20-22	283.10	284.00	0.90	54.0	0.56	0.55	0.09	0.37	1.5	0.05
BR-20-22	284.00	285.00	1.00	2.0	0.09	0.03	0.09	0.01	<1.0	0.01
BR-20-22	285.00	286.50	1.50	14.0	0.78	0.41	0.13	0.26	<1.0	0.07
BR-20-22	286.50	287.80	1.30	4.0	0.07	0.17	0.10	0.02	<1.0	0.01
BR-20-22	287.80	289.00	1.20	22.0	0.49	0.24	0.12	0.05	5.0	0.01
BR-20-22	289.00	290.00	1.00	4.0	0.10	0.03	0.12	0.01	<1.0	<0.01
BR-20-22	290.00	291.00	1.00	23.0	0.17	0.05	0.07	0.26	1.0	0.02
BR-20-22	291.00	292.20	1.20	<1.0	0.04	0.01	0.07	<0.01	<1.0	<0.01
BR-20-22	292.20	293.10	0.90	3.0	0.32	0.04	0.07	<0.01	<1.0	<0.01
BR-20-22	293.10	293.90	0.80	13.0	1.48	0.19	0.09	0.02	7.3	0.01
BR-20-22	293.90	295.00	1.10	2.0	0.04	0.01	0.03	<0.01	<1.0	<0.01
BR-20-22	295.00	296.00	1.00	2.0	0.03	0.02	0.05	<0.01	<1.0	<0.01
BR-20-22	296.00	296.90	0.90	2.0	0.05	0.03	0.03	<0.01	<1.0	<0.01
BR-20-22	296.90	297.70	0.80	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-20-22	297.70	298.90	1.20	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-20-22	298.90	300.00	1.10	6.0	1.39	0.40	0.03	0.03	1.0	0.04
BR-20-22	300.00	301.00	1.00	2.0	0.08	0.04	0.01	<0.01	<1.0	0.01
BR-20-22	301.00	302.00	1.00	3.0	0.26	0.09	0.06	<0.01	1.2	0.01
BR-20-22	302.00	303.20	1.20	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-20-22	303.20	304.00	0.80	<1.0	0.02	0.09	0.02	<0.01	<1.0	<0.01
BR-20-22	304.00	305.00	1.00	<1.0	0.02	<0.01	0.05	<0.01	<1.0	<0.01
BR-20-22	305.00	306.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-20-22	306.00	307.00	1.00	<1.0	<0.01	0.06	0.02	0.02	<1.0	0.01
BR-20-22	307.00	308.00	1.00	<1.0	0.05	0.04	0.02	<0.01	<1.0	<0.01
BR-20-22	308.00	309.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-20-22	309.00	310.00	1.00	<1.0	0.05	0.02	0.02	<0.01	<1.0	<0.01
BR-20-22	310.00	311.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)		
BR-20-22	311.00	312.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01		
BR-20-22	312.00	313.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	313.00	314.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	314.00	315.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	315.00	316.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	316.00	317.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	317.00	318.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	318.00	319.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	4.5	<0.01		
BR-20-22	319.00	320.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	320.00	321.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	321.00	322.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	322.00	323.00	1.00	<1.0	0.08	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	323.00	324.00	1.00	<1.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01		
BR-20-22	324.00	325.00	1.00	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01		
BR-20-22	325.00	326.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01		
BR-20-22	326.00	326.90	0.90	<1.0	0.02	0.01	0.01	<0.01	<1.0	<0.01		
BR-21-22	0.00	131.00	131.00	Interval not sampled								
BR-21-22	131.00	132.00	1.00	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	0.03		
BR-21-22	132.00	133.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	0.03		
BR-21-22	133.00	133.40	0.40	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.02		
BR-21-22	133.40	134.10	0.70	<1.0	0.01	0.05	0.01	0.01	<1.0	0.02		
BR-21-22	134.10	134.60	0.50	<1.0	0.01	0.02	0.01	0.01	<1.0	0.02		
BR-21-22	134.60	135.20	0.60	<1.0	0.07	0.18	0.08	0.04	<1.0	0.09		
BR-21-22	135.20	136.15	0.95	<1.0	0.02	0.07	0.04	0.01	<1.0	0.05		
BR-21-22	136.15	137.00	0.85	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01		
BR-21-22	137.00	137.80	0.80	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01		
BR-21-22	137.80	139.00	1.20	4.0	0.02	0.01	<0.01	<0.01	<1.0	0.01		
BR-21-22	139.00	140.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01		
BR-21-22	140.00	141.00	1.00	<1.0	<0.01	<0.01	0.14	<0.01	<1.0	<0.01		
BR-21-22	141.00	141.50	0.50	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	0.01		
BR-21-22	141.50	142.00	0.50	<1.0	0.09	0.07	<0.01	<0.01	<1.0	0.04		
BR-21-22	142.00	143.00	1.00	<1.0	0.43	0.08	<0.01	<0.01	<1.0	0.04		
BR-21-22	143.00	144.00	1.00	<1.0	0.47	0.07	<0.01	<0.01	<1.0	0.03		
BR-21-22	144.00	144.70	0.70	<1.0	0.17	0.04	<0.01	<0.01	1.0	0.03		
BR-21-22	144.70	145.30	0.60	<1.0	0.18	0.05	0.01	0.01	<1.0	0.04		
BR-21-22	145.30	145.90	0.60	<1.0	0.84	0.10	0.01	0.01	<1.0	0.07		
BR-21-22	145.90	147.00	1.10	<1.0	0.12	0.01	<0.01	<0.01	<1.0	0.01		
BR-21-22	147.00	148.00	1.00	<1.0	0.10	0.02	<0.01	<0.01	<1.0	0.02		
BR-21-22	148.00	149.00	1.00	<1.0	0.08	0.03	<0.01	<0.01	<1.0	0.02		
BR-21-22	149.00	150.00	1.00	<1.0	0.05	0.03	<0.01	<0.01	<1.0	<0.01		
BR-21-22	150.00	151.00	1.00	<1.0	0.05	0.02	<0.01	<0.01	<1.0	<0.01		
BR-21-22	151.00	152.00	1.00	<1.0	0.02	0.01	0.01	<0.01	<1.0	<0.01		
BR-21-22	152.00	153.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01		
BR-21-22	153.00	154.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01		
BR-21-22	154.00	155.00	1.00	<1.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01		
BR-21-22	155.00	156.00	1.00	<1.0	0.10	0.02	<0.01	<0.01	<1.0	<0.01		
BR-21-22	156.00	157.00	1.00	<1.0	0.11	0.03	<0.01	<0.01	<1.0	<0.01		
BR-21-22	157.00	158.10	1.10	<1.0	0.14	0.10	<0.01	<0.01	<1.0	<0.01		
BR-21-22	158.10	159.00	0.90	<1.0	0.18	0.07	<0.01	<0.01	<1.0	<0.01		
BR-21-22	159.00	160.00	1.00	<1.0	0.03	0.01	0.02	<0.01	<1.0	<0.01		
BR-21-22	160.00	161.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01		
BR-21-22	161.00	162.00	1.00	<1.0	0.07	0.03	<0.01	<0.01	<1.0	<0.01		
BR-21-22	162.00	163.00	1.00	<1.0	0.12	0.03	<0.01	<0.01	<1.0	<0.01		
BR-21-22	163.00	164.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01		
BR-21-22	164.00	165.00	1.00	<1.0	0.16	0.06	<0.01	<0.01	<1.0	<0.01		
BR-21-22	165.00	166.00	1.00	<1.0	0.09	0.06	<0.01	<0.01	<1.0	0.01		



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-21-22	166.00	167.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	167.00	168.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	168.00	168.40	0.40	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	168.40	169.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	169.40	170.00	0.60	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	170.00	171.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	171.00	172.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	172.00	173.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	173.00	174.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	1.6	<0.01
BR-21-22	174.00	175.00	1.00	2.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	175.00	175.80	0.80	2.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	175.80	176.60	0.80	2.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	176.60	178.00	1.40	5.0	0.26	0.01	<0.01	<0.01	1.2	<0.01
BR-21-22	178.00	179.00	1.00	3.0	0.03	0.02	<0.01	<0.01	1.2	<0.01
BR-21-22	179.00	180.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	180.00	181.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	181.00	182.00	1.00	3.0	0.11	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	182.00	183.00	1.00	3.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	183.00	184.00	1.00	2.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	184.00	185.00	1.00	3.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	185.00	186.00	1.00	1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	186.00	187.00	1.00	9.0	0.02	0.05	<0.01	<0.01	2.8	<0.01
BR-21-22	187.00	188.00	1.00	5.0	0.12	0.03	<0.01	<0.01	<1.0	<0.01
BR-21-22	188.00	189.00	1.00	7.0	0.26	0.01	<0.01	<0.01	1.2	<0.01
BR-21-22	189.00	190.00	1.00	4.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	190.00	191.00	1.00	1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	191.00	191.90	0.90	4.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	191.90	193.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	1.3	0.01
BR-21-22	193.00	194.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	194.00	195.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-21-22	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	196.00	197.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	210.00	211.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	211.40	212.40	1.00	<1.0	0.01	0.04	<0.01	0.01	<1.0	<0.01
BR-21-22	212.40	213.00	0.60	<1.0	0.02	0.03	0.02	0.01	1.3	0.01
BR-21-22	213.00	213.80	0.80	704.0	12.15	8.71	2.97	0.44	38.1	0.12
BR-21-22	213.80	214.70	0.90	48.0	2.12	0.88	0.50	0.05	3.2	0.04
BR-21-22	214.70	215.30	0.60	291.0	9.15	3.49	1.97	1.42	3.4	0.31
BR-21-22	215.30	216.10	0.80	287.0	12.00	4.70	0.89	0.66	1.0	0.23
BR-21-22	216.10	217.00	0.90	156.0	6.33	3.21	1.45	0.30	<1.0	0.14
BR-21-22	217.00	218.00	1.00	59.0	2.55	1.23	0.86	0.17	<1.0	0.07
BR-21-22	218.00	219.00	1.00	162.0	7.56	4.32	1.15	0.74	2.3	0.29
BR-21-22	219.00	220.00	1.00	65.0	2.62	1.23	0.19	0.22	<1.0	0.06
BR-21-22	220.00	221.00	1.00	10.0	0.92	0.51	0.16	0.11	1.3	0.02
BR-21-22	221.00	222.00	1.00	9.0	0.80	0.60	0.11	0.11	1.9	0.01
BR-21-22	222.00	223.00	1.00	22.0	1.41	1.09	0.32	0.91	1.6	0.15
BR-21-22	223.00	224.00	1.00	40.0	2.13	0.25	0.93	0.35	6.8	0.11
BR-21-22	224.00	224.70	0.70	5.0	0.03	0.02	0.29	0.08	<1.0	0.02
BR-21-22	224.70	225.50	0.80	6.0	0.37	0.05	0.12	0.01	5.1	0.01
BR-21-22	225.50	226.60	1.10	4.0	0.20	0.03	0.13	<0.01	1.3	<0.01
BR-21-22	226.60	227.60	1.00	<1.0	0.03	0.01	0.08	<0.01	<1.0	<0.01
BR-21-22	227.60	228.60	1.00	<1.0	0.01	<0.01	0.13	<0.01	1.0	<0.01
BR-21-22	228.60	229.20	0.60	4.0	0.08	0.04	0.06	<0.01	2.1	<0.01
BR-21-22	229.20	230.40	1.20	104.0	0.34	0.13	0.19	0.06	1.9	0.017
BR-21-22	230.40	231.40	1.00	20.0	0.39	0.16	0.24	<0.01	1.2	<0.01
BR-21-22	231.40	232.20	0.80	7.0	0.10	0.06	0.14	<0.01	1.2	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-21-22	232.20	233.10	0.90	14.0	0.26	0.05	0.09	<0.01	<1.0	<0.01
BR-21-22	233.10	234.00	0.90	12.0	0.20	0.05	0.21	<0.01	<1.0	<0.01
BR-21-22	234.00	235.00	1.00	25.0	0.18	0.04	0.08	0.02	1.0	0.01
BR-21-22	235.00	235.80	0.80	13.0	0.07	0.02	0.04	0.03	<1.0	0.01
BR-21-22	235.80	236.70	0.90	<1.0	0.05	0.02	0.05	<0.01	<1.0	<0.01
BR-21-22	236.70	237.40	0.70	<1.0	0.06	0.01	0.03	<0.01	<1.0	<0.01
BR-21-22	237.40	238.20	0.80	3.0	0.14	0.08	0.10	<0.01	<1.0	<0.01
BR-21-22	238.20	239.10	0.90	3.0	0.21	0.04	0.05	<0.01	1.3	<0.01
BR-21-22	239.10	240.10	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-21-22	240.10	241.00	0.90	<1.0	0.04	0.01	0.06	<0.01	<1.0	<0.01
BR-21-22	241.00	242.00	1.00	<1.0	0.03	0.02	0.06	<0.01	<1.0	<0.01
BR-21-22	242.00	242.90	0.90	3.0	0.22	0.04	0.07	<0.01	1.1	<0.01
BR-21-22	242.90	244.10	1.20	3.0	0.17	0.03	0.08	<0.01	1.0	<0.01
BR-21-22	244.10	245.30	1.20	73.0	1.17	0.77	0.05	0.13	4.6	0.04
BR-21-22	245.30	246.40	1.10	4.0	0.19	0.01	0.20	<0.01	<1.0	0.01
BR-21-22	246.40	246.70	0.30	4.0	0.31	0.01	0.26	<0.01	<1.0	0.01
BR-21-22	246.70	247.10	0.40	24.0	1.28	0.21	0.22	0.33	<1.0	0.08
BR-21-22	247.10	247.60	0.50	31.0	2.17	1.46	0.16	0.27	<1.0	0.14
BR-21-22	247.60	248.60	1.00	3.0	0.39	0.16	0.04	0.02	<1.0	<0.01
BR-21-22	248.60	249.40	0.80	<1.0	0.07	0.03	0.06	<0.01	<1.0	<0.01
BR-21-22	249.40	250.00	0.60	<1.0	<0.01	0.02	0.04	<0.01	<1.0	<0.01
BR-21-22	250.00	251.10	1.10	<1.0	0.04	0.05	0.04	<0.01	3.0	<0.01
BR-21-22	251.10	252.00	0.90	3.0	0.05	0.02	0.02	0.01	<1.0	0.01
BR-21-22	252.00	252.70	0.70	3.0	0.15	0.05	0.04	<0.01	<1.0	0.01
BR-21-22	252.70	253.30	0.60	<1.0	0.04	<0.01	0.03	<0.01	<1.0	<0.01
BR-21-22	253.30	254.00	0.70	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-21-22	254.00	255.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	1.2	<0.01
BR-21-22	255.20	256.20	1.00	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	256.20	257.30	1.10	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	257.30	258.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	258.40	259.40	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	259.40	260.40	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	260.40	261.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	261.40	262.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	262.40	263.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	263.40	264.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	264.50	265.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-21-22	265.60	266.80	1.10	2.0	0.05	0.01	0.42	0.025	<1.0	0.02
BR-22-22	0.00	118.20	118.20	Interval not sampled						
BR-22-22	118.20	119.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	119.00	120.20	1.20	4.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	124.10	125.20	1.10	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-22-22	125.20	125.90	0.70	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	125.90	127.00	1.10	<1.0	0.02	0.05	0.02	0.01	<1.0	<0.01
BR-22-22	127.00	128.10	1.10	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-22-22	128.10	129.30	1.20	<1.0	0.02	0.02	0.08	0.01	<1.0	<0.01
BR-22-22	129.30	130.50	1.20	<1.0	0.01	0.01	<0.01	0.01	<1.0	<0.01
BR-22-22	130.50	131.50	1.00	<1.0	0.03	0.10	<0.01	0.01	<1.0	<0.01
BR-22-22	131.50	132.50	1.00	<1.0	0.01	0.01	<0.01	0.01	<1.0	<0.01
BR-22-22	132.50	133.70	1.20	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	133.70	134.70	1.00	<1.0	0.02	0.01	<0.01	0.01	<1.0	<0.01
BR-22-22	134.70	135.30	0.60	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-22-22	135.30	136.50	1.20	<1.0	0.01	0.02	<0.01	0.01	<1.0	<0.01
BR-22-22	136.50	137.20	0.70	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-22-22	137.20	138.40	1.20	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-22-22	138.40	139.40	1.00	<1.0	0.01	0.06	<0.01	0.01	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-22-22	139.40	140.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	140.50	141.40	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	141.40	142.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	142.40	143.30	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	143.30	145.10	1.80	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	0.01
BR-22-22	145.10	147.00	1.90	<1.0	0.02	0.08	<0.01	0.01	<1.0	<0.01
BR-22-22	147.00	148.00	1.00	<1.0	0.01	0.04	0.01	<0.01	<1.0	0.02
BR-22-22	148.00	149.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.03
BR-22-22	149.00	149.90	0.90	<1.0	0.01	0.05	<0.01	0.01	<1.0	0.01
BR-22-22	149.90	151.00	1.10	<1.0	0.01	0.15	0.02	0.02	<1.0	0.02
BR-22-22	151.00	151.80	0.80	<1.0	<0.01	0.02	0.02	<0.01	<1.0	0.02
BR-22-22	151.80	152.40	0.60	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-22-22	152.40	153.00	0.60	<1.0	0.02	0.06	<0.01	0.01	<1.0	0.03
BR-22-22	153.00	153.70	0.70	<1.0	0.05	0.13	<0.01	0.01	<1.0	0.03
BR-22-22	153.70	154.00	0.30	<1.0	0.01	0.03	<0.01	<0.01	<1.0	0.06
BR-22-22	154.00	154.70	0.70	<1.0	0.03	0.04	<0.01	<0.01	<1.0	0.04
BR-22-22	154.70	155.70	1.00	87.0	1.53	0.68	0.43	0.06	21.2	0.12
BR-22-22	155.70	156.60	0.90	249.0	3.59	2.01	0.89	0.14	54.1	0.27
BR-22-22	156.60	157.00	0.40	15.0	0.39	0.10	0.02	<0.01	2.0	0.03
BR-22-22	157.00	158.00	1.00	16.0	0.59	0.15	0.05	<0.01	8.5	0.08
BR-22-22	158.00	159.00	1.00	8.0	0.47	0.12	0.02	<0.01	3.3	0.07
BR-22-22	159.00	160.00	1.00	14.0	0.63	0.17	0.03	<0.01	4.9	0.09
BR-22-22	160.00	160.80	0.80	6.0	0.42	0.10	0.03	<0.01	3.3	0.06
BR-22-22	160.80	162.00	1.20	<1.0	0.07	0.05	<0.01	<0.01	<1.0	0.06
BR-22-22	162.00	163.00	1.00	<1.0	0.13	0.08	<0.01	<0.01	<1.0	0.08
BR-22-22	163.00	164.00	1.00	<1.0	0.10	0.02	<0.01	<0.01	<1.0	0.02
BR-22-22	164.00	165.00	1.00	<1.0	0.06	0.05	<0.01	<0.01	<1.0	0.01
BR-22-22	165.00	166.00	1.00	<1.0	0.05	0.06	<0.01	<0.01	<1.0	<0.01
BR-22-22	166.00	167.00	1.00	<1.0	0.01	0.14	<0.01	<0.01	<1.0	<0.01
BR-22-22	167.00	168.00	1.00	<1.0	0.01	0.16	<0.01	<0.01	<1.0	<0.01
BR-22-22	168.00	169.00	1.00	<1.0	<0.01	0.10	<0.01	<0.01	<1.0	<0.01
BR-22-22	169.00	170.00	1.00	4.0	0.10	0.69	<0.01	<0.01	<1.0	<0.01
BR-22-22	170.00	171.00	1.00	<1.0	0.04	0.27	<0.01	<0.01	<1.0	<0.01
BR-22-22	171.00	172.00	1.00	<1.0	0.02	0.30	<0.01	<0.01	<1.0	<0.01
BR-22-22	172.00	173.00	1.00	<1.0	0.02	0.22	<0.01	<0.01	<1.0	<0.01
BR-22-22	173.00	174.00	1.00	<1.0	0.01	0.10	<0.01	<0.01	<1.0	<0.01
BR-22-22	174.00	175.00	1.00	<1.0	0.01	0.07	<0.01	<0.01	<1.0	<0.01
BR-22-22	175.00	176.00	1.00	<1.0	<0.01	0.07	<0.01	<0.01	<1.0	<0.01
BR-22-22	176.00	177.00	1.00	<1.0	<0.01	0.05	<0.01	<0.01	<1.0	<0.01
BR-22-22	177.00	178.00	1.00	<1.0	<0.01	0.05	<0.01	<0.01	<1.0	<0.01
BR-22-22	178.00	179.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-22-22	179.00	180.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	180.00	180.70	0.70	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	180.70	181.30	0.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	181.30	182.00	0.70	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-22-22	182.00	183.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-22-22	183.00	184.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	184.00	185.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	185.00	186.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	186.00	187.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	187.00	187.80	0.80	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	187.80	189.00	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	189.00	190.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	190.00	191.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.02
BR-22-22	191.00	192.00	1.00	<1.0	0.17	0.01	<0.01	<0.01	1.2	0.03
BR-22-22	192.00	193.00	1.00	<1.0	0.09	0.04	<0.01	<0.01	<1.0	0.04



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-22-22	193.00	194.00	1.00	<1.0	4.23	0.89	<0.01	<0.01	1.2	0.18
BR-22-22	194.00	194.70	0.70	3.0	0.46	0.15	<0.01	<0.01	<1.0	0.03
BR-22-22	194.70	195.50	0.80	3.0	0.36	0.07	<0.01	<0.01	1.5	0.01
BR-22-22	195.50	196.20	0.70	<1.0	0.28	0.05	<0.01	<0.01	<1.0	0.01
BR-22-22	196.20	197.00	0.80	<1.0	0.18	0.04	<0.01	<0.01	1.0	0.01
BR-22-22	197.00	198.00	1.00	<1.0	0.15	0.04	<0.01	<0.01	<1.0	0.02
BR-22-22	198.00	199.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	199.00	200.00	1.00	<1.0	0.05	0.01	<0.01	<0.01	<1.0	0.01
BR-22-22	200.00	200.90	0.90	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	200.90	202.00	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	202.00	203.00	1.00	3.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	203.00	204.00	1.00	7.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	204.00	205.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-22-22	205.00	205.80	0.80	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	0.00	110.40	110.40	Interval not sampled						
BR-23-22	110.40	111.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	111.50	112.40	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	112.40	113.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	113.50	115.00	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	115.00	116.70	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	116.70	117.90	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	117.90	119.10	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	119.10	120.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	120.30	121.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	121.50	124.40	2.90	<1.0	0.011	<0.01	<0.01	<0.01	1.1	<0.01
BR-23-22	124.40	127.70	3.30	4.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	127.70	130.10	2.40	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	130.10	131.70	1.60	<1.0	0.04	0.19	<0.01	0.01	<1.0	0.02
BR-23-22	131.70	133.70	2.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-23-22	133.70	134.70	1.00	<1.0	0.03	0.19	<0.01	0.01	<1.0	0.02
BR-23-22	134.70	136.40	1.70	<1.0	0.02	0.13	<0.01	0.03	<1.0	0.01
BR-23-22	136.40	137.60	1.20	<1.0	0.05	0.25	<0.01	<0.01	<1.0	0.02
BR-23-22	137.60	138.50	0.90	<1.0	0.02	0.06	<0.01	0.01	<1.0	0.04
BR-23-22	138.50	139.60	1.10	<1.0	0.03	0.01	<0.01	<0.01	<1.0	0.03
BR-23-22	139.60	140.80	1.20	<1.0	0.13	0.06	<0.01	0.01	<1.0	0.02
BR-23-22	140.80	142.00	1.20	<1.0	0.01	0.04	<0.01	<0.01	<1.0	0.01
BR-23-22	142.00	142.60	0.60	<1.0	0.02	0.05	<0.01	0.01	<1.0	0.02
BR-23-22	142.60	143.80	1.20	2.0	0.01	0.14	<0.01	0.01	<1.0	0.01
BR-23-22	143.80	144.50	0.70	<1.0	0.34	0.12	<0.01	0.01	<1.0	0.08
BR-23-22	144.50	145.40	0.90	<1.0	0.08	0.10	<0.01	0.01	1.0	0.07
BR-23-22	145.40	146.30	0.90	<1.0	0.09	0.19	<0.01	0.02	1.3	0.05
BR-23-22	146.30	147.00	0.70	877.0	0.65	5.44	1.34	0.99	65.2	0.61
BR-23-22	147.00	148.00	1.00	973.0	3.33	7.57	2.01	1.07	58.9	0.83
BR-23-22	148.00	148.80	0.80	521.0	13.09	9.29	2.92	0.92	43.6	1.00
BR-23-22	148.80	149.70	0.90	728.0	1.76	2.09	0.61	0.93	4.6	0.73
BR-23-22	149.70	150.50	0.80	13.0	0.34	0.19	0.27	0.04	<1.0	0.06
BR-23-22	150.50	151.50	1.00	9.0	0.05	0.31	0.13	0.02	4.6	0.04
BR-23-22	151.50	152.70	1.20	<1.0	0.02	0.01	0.03	<0.01	2.5	<0.01
BR-23-22	152.70	153.80	1.10	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-23-22	153.80	154.70	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	154.70	155.60	0.90	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	155.60	156.60	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-23-22	156.60	157.80	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	157.80	159.00	1.20	3.0	0.06	0.01	<0.01	0.01	<1.0	0.01
BR-23-22	159.00	160.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	160.00	161.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	1.3	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-23-22	161.00	162.00	1.00	<1.0	0.02	0.02	0.020	<0.01	<1.0	0.01
BR-23-22	162.00	163.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	163.00	163.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	163.90	165.10	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	165.10	166.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	166.30	167.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	167.50	168.30	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	168.30	169.10	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	169.10	170.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	170.00	171.00	1.00	<1.0	<0.01	<0.01	0.010	<0.01	<1.0	<0.01
BR-23-22	171.00	172.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	172.00	172.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	172.90	174.00	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	174.00	175.20	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	175.20	176.00	0.80	<1.0	0.03	0.05	<0.01	<0.01	<1.0	<0.01
BR-23-22	176.00	176.90	0.90	4.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	176.90	178.00	1.10	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	178.00	179.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	179.00	180.00	1.00	4.0	0.06	0.02	<0.01	<0.01	<1.0	<0.01
BR-23-22	180.00	180.90	0.90	4.0	0.06	0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	180.90	182.00	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	182.00	182.90	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	182.90	184.00	1.10	5.0	0.10	0.02	<0.01	<0.01	1.1	0.01
BR-23-22	184.00	185.00	1.00	8.0	0.22	0.08	<0.01	<0.01	<1.0	<0.01
BR-23-22	185.00	186.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	186.00	187.00	1.00	<1.0	0.04	0.05	<0.01	<0.01	<1.0	<0.01
BR-23-22	187.00	188.00	1.00	<1.0	0.03	0.01	0.01	<0.01	1.0	<0.01
BR-23-22	188.00	189.00	1.00	7.0	0.15	0.32	0.06	0.05	<1.0	0.03
BR-23-22	189.00	190.00	1.00	<1.0	0.07	0.01	0.03	<0.01	<1.0	<0.01
BR-23-22	190.00	190.70	0.70	<1.0	0.14	0.03	0.05	<0.01	<1.0	<0.01
BR-23-22	190.70	191.80	1.10	<1.0	0.02	0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	191.80	193.00	1.20	<1.0	0.06	0.01	0.03	<0.01	<1.0	<0.01
BR-23-22	193.00	194.00	1.00	<1.0	0.03	0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	194.00	195.00	1.00	2.0	0.13	0.06	0.04	0.01	<1.0	0.01
BR-23-22	195.00	196.20	1.20	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-23-22	196.20	197.30	1.10	<1.0	0.07	<0.01	<0.01	<0.01	<1.0	0.04
BR-23-22	197.30	198.10	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-23-22	198.10	199.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	199.10	200.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	200.30	201.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	201.50	202.40	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	202.40	203.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	203.40	204.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	204.40	206.00	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	206.00	207.50	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	207.50	208.70	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-23-22	208.70	209.70	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	209.70	210.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	210.90	212.10	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	212.10	213.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	213.30	214.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	214.30	215.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	215.50	216.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	216.50	217.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	217.60	218.60	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	0.01
BR-23-22	218.60	219.70	1.10	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-23-22	219.70	220.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	220.80	222.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	222.00	223.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	223.00	224.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	224.00	225.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	225.00	226.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	226.00	227.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	227.00	228.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	228.20	229.10	0.90	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.03
BR-23-22	229.10	229.90	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	229.90	230.70	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	230.70	231.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	231.90	233.10	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	233.10	234.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	234.30	235.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	235.40	236.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	236.60	237.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	237.60	238.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	238.80	240.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	240.00	241.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-23-22	241.00	242.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	242.00	243.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	243.20	244.10	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	244.10	245.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	245.30	246.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	246.40	247.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	247.60	248.70	1.10	<1.0	<0.01	<0.01	<0.01	0.02	<1.0	<0.01
BR-23-22	248.70	249.90	1.20	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-23-22	249.90	250.60	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-23-22	250.60	251.70	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	251.70	252.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	252.90	254.00	1.10	<1.0	0.02	0.03	<0.01	0.01	30.9	<0.01
BR-23-22	254.00	255.20	1.20	<1.0	0.04	0.05	0.03	0.01	1.9	0.02
BR-23-22	255.20	256.0	0.80	15.0	0.04	0.20	1.07	0.07	83.7	0.01
BR-23-22	256.00	256.80	0.80	182.0	0.29	2.08	0.70	0.05	85.0	0.03
BR-23-22	256.80	257.40	0.60	438.0	5.23	5.89	1.33	0.19	72.0	0.09
BR-23-22	257.40	258.30	0.90	405.0	5.85	2.54	0.48	0.13	80.3	0.07
BR-23-22	258.30	259.10	0.80	196.0	2.85	2.14	0.31	0.07	85.0	<0.01
BR-23-22	259.10	260.00	0.90	249.0	8.91	5.39	0.85	0.14	71.0	0.06
BR-23-22	260.00	261.00	1.00	137.0	11.08	5.72	0.68	0.12	70.4	0.04
BR-23-22	261.00	262.00	1.00	127.0	9.99	4.78	0.82	0.16	69.3	0.04
BR-23-22	262.00	262.70	0.70	118.0	10.23	4.67	0.63	0.14	70.5	0.04
BR-23-22	262.70	263.30	0.60	121.0	10.07	4.28	0.9	0.13	71.8	0.05
BR-23-22	263.30	264.00	0.70	118.0	10.11	4.29	0.71	0.13	69.8	0.04
BR-23-22	264.00	265.00	1.00	146.0	10.98	4.04	0.69	0.12	66.5	0.04
BR-23-22	265.00	266.00	1.00	146.0	11.9	5.41	1.02	0.17	68.3	0.04
BR-23-22	266.00	267.00	1.00	118.0	10.27	4.02	0.96	0.14	68.9	0.03
BR-23-22	267.00	268.10	1.10	98.0	10.2	4.63	1.08	0.17	73.8	0.03
BR-23-22	268.10	269.20	1.10	60.0	7.99	3.79	0.67	0.15	78.3	0.03
BR-23-22	269.20	270.00	0.80	60.0	9.08	3.8	0.75	0.16	78.2	0.03
BR-23-22	270.00	271.00	1.00	70.0	12.17	4.41	0.95	0.15	72.0	0.04
BR-23-22	271.00	271.70	0.70	82.0	10.32	4.59	0.73	0.16	69.8	0.04
BR-23-22	271.70	272.70	1.00	66.0	10.19	4.41	0.66	0.15	73.7	0.02
BR-23-22	272.70	273.70	1.00	64.0	10.75	4.36	0.48	0.13	74.8	0.02
BR-23-22	273.70	274.90	1.20	76.0	12.68	6.03	0.57	0.24	64.6	0.03
BR-23-22	274.90	275.60	0.70	63.0	12.28	4.93	0.56	0.20	69.5	0.03



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-23-22	275.60	276.30	0.70	74.0	7.15	6.74	0.32	0.30	68.7	0.03
BR-23-22	276.30	277.30	1.00	87.0	4.27	7.66	0.58	0.46	69.4	0.03
BR-23-22	277.30	278.40	1.10	83.0	4.97	5.25	1.14	0.33	75.4	0.01
BR-23-22	278.40	279.00	0.60	125.0	9.48	4.85	1.34	0.35	69.7	0.06
BR-23-22	279.00	280.00	1.00	113.0	11.31	4.54	1.35	0.27	70.7	0.07
BR-23-22	280.00	280.90	0.90	162.0	13.23	7.44	1.35	0.60	59.3	0.12
BR-23-22	280.90	281.70	0.80	135.0	13.53	7.95	1.55	0.70	55.8	0.07
BR-23-22	281.70	282.40	0.70	359.0	13.25	7.69	3.70	0.99	55.6	0.17
BR-23-22	282.40	283.00	0.60	590.0	16.66	8.01	4.46	1.21	50.3	0.49
BR-23-22	283.00	283.50	0.50	105.0	5.54	2.97	0.78	0.33	3.6	0.13
BR-23-22	283.50	284.10	0.60	29.0	3.35	0.33	0.31	0.03	10.3	0.03
BR-23-22	284.10	285.30	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	285.30	286.50	1.20	6.0	0.01	<0.01	<0.01	0.03	<1.0	0.02
BR-23-22	286.50	287.00	0.50	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	287.00	288.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	288.20	289.10	0.90	<1.0	<0.01	<0.01	0.04	0.01	<1.0	<0.01
BR-23-22	289.10	289.90	0.80	<1.0	0.01	0.02	0.10	<0.01	<1.0	<0.01
BR-23-22	289.90	290.70	0.80	4.0	0.23	0.10	0.11	0.02	<1.0	<0.01
BR-23-22	290.70	291.90	1.20	<1.0	0.08	0.01	0.05	<0.01	<1.0	<0.01
BR-23-22	291.90	292.50	0.60	<1.0	0.04	0.02	0.07	<0.01	<1.0	<0.01
BR-23-22	292.50	293.60	1.10	<1.0	0.01	0.01	0.05	0.01	<1.0	0.01
BR-23-22	293.60	294.80	1.20	<1.0	<0.01	0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	294.80	296.00	1.20	<1.0	0.10	0.02	0.07	<0.01	<1.0	<0.01
BR-23-22	296.00	297.00	1.00	4.0	0.30	0.07	0.05	0.07	<1.0	0.03
BR-23-22	297.00	298.00	1.00	<1.0	0.05	0.03	0.07	0.03	1.0	0.01
BR-23-22	298.00	299.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-23-22	299.00	300.00	1.00	<1.0	0.19	0.02	0.13	<0.01	<1.0	<0.01
BR-23-22	300.00	301.00	1.00	3.0	0.19	0.04	0.07	<0.01	<1.0	<0.01
BR-23-22	301.00	301.90	0.90	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	301.90	302.90	1.00	2.0	0.21	0.02	0.08	<0.01	<1.0	<0.01
BR-23-22	302.90	304.00	1.10	4.0	0.10	0.02	0.06	0.02	1.2	0.01
BR-23-22	304.00	305.00	1.00	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-23-22	305.00	305.90	0.90	<1.0	0.04	0.01	0.06	<0.01	<1.0	<0.01
BR-23-22	305.90	307.00	1.10	<1.0	0.13	0.03	0.06	<0.01	<1.0	<0.01
BR-23-22	307.00	308.00	1.00	3.0	0.19	0.06	0.08	<0.01	1.1	<0.01
BR-23-22	308.00	309.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	309.00	310.20	1.20	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-23-22	310.20	311.00	0.80	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	311.00	312.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-23-22	312.00	313.00	1.00	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-23-22	313.00	314.00	1.00	<1.0	0.02	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	314.00	314.90	0.90	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	314.90	315.90	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	315.90	317.00	1.10	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	317.00	318.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	318.00	319.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	319.00	320.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-23-22	320.00	320.90	0.90	<1.0	0.08	0.01	0.04	<0.01	<1.0	<0.01
BR-23-22	320.90	322.00	1.10	2.0	0.10	0.02	0.06	<0.01	<1.0	<0.01
BR-23-22	322.00	323.20	1.20	<1.0	0.04	0.01	0.03	<0.01	<1.0	<0.01
BR-23-22	323.20	324.30	1.10	1.0	0.04	<0.01	0.02	<0.01	<1.0	<0.01
BR-23-22	324.30	325.50	1.20	8.0	0.05	0.04	0.02	0.02	<1.0	0.01
BR-23-22	325.50	326.50	1.00	<1.0	0.03	0.06	<0.01	<0.01	<1.0	<0.01
BR-23-22	326.50	327.70	1.20	<1.0	0.09	0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	327.70	328.70	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-23-22	328.70	329.70	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01



APPENDIX 2: JORC TABLES

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<p>Drill core samples were collected from half cut PQ3 and HQ3 diameter core, where the core was sawn exactly in half along a pre-defined cutting line.</p> <p>The half core samples, typically weighing between 4-12kg, were placed into labelled and tagged sample bags prior to dispatch to the SGS Ankara laboratory in Turkey.</p> <p>Sample intervals were determined by the geologist, usually at 1m intervals within massive ore, otherwise separated on narrower intervals where geological boundaries exist.</p>
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Sample intervals were selected by the logging geologist based on geological criteria or using a nominal maximum 1m sample length in homogenous massive sulphide ore. A minimum sample length of 0,2m is employed where necessary. Sampling is based on visually mineralised intervals, with a calibrated portable XRF device used only as a guide.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</i>	<p>For drill hole analyses, diamond drilling was used to obtain 4 to 12kg samples, crushed and pulverized at SGS Ankara, Turkey (code PRP89). All core samples were sent to SGS Ankara, Turkey by truck for gold analysis by 30-gram fire assay with AA finish (code FAA303), and multi-element analyses were conducted by the same lab using a highly oxidising digestion with ICP-AES finish (code ICM40B).</p> <p>Barite was assayed using lithium borate fusion prior to acid dissolution and ICP-MS analysis (code ICP95A). Overlimit Barium (>10%) results were analysed using portable pXRF (code pXRF73C27) and the results above detection limit sent to SGS Lakefield, Canada by air freight for XRF analysis (GC_XR76V).</p>
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>All drill holes were drilled using PQ3 and HQ3 diameter core.</p> <p>All drill holes were drilled by drilling contractor Drillex BH d.o.o., a division of Drillex International.</p> <p>PQ3 and HQ3 core was held in a core barrel by a stainless steel "split" inner tube. The use of the inner tube ensured that all core maintained its orientation prior to removal into the core trays. Drill core was stored in suitable core boxes and stacked inside the exploration facility in Vares.</p> <p>All drillholes were surveyed at 9m and every 30m thereafter by a Reflex "Ezy-Track" digital down-hole survey tool. No significant deviation or drilling problems have been identified.</p>
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	All core was geotechnically logged to verify drillers blocks, record run length, recovered length, core recovery (%) and RQD.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	There is no observed relationship between sample recovery and grade, and no significant loss of core. No sample bias has been identified. Core recoveries are generally >90%
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Core samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	All core is photographed. Core logging is both qualitative and quantitative. Logging records lithology, alteration, structures, veining, sulphide minerals and percentages.
	<i>The total length and percentage of the relevant intersections logged.</i>	100% of drill core is logged.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Drill core was cut in half using an Almonte automatic diamond core saw. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates).
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Not applicable, as all samples are core.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Collection of around 4-6kg of half core material with subsequent pulverisation of the total charge provided an appropriate and representative sample for analysis. Sample preparation was undertaken at the SGS Ankara, to industry best practice.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Whole rock blanks and certified standards (~1 in 15) were introduced to the sample run to ensure laboratory QAQC. Industry best practice was adopted by SGS for laboratory sub-sampling and the avoidance of any cross contamination. SGS inserted internal controls and cleaned all sampling equipment with a barren quartz rock every 20 samples. All sample preparation stations and equipment were compressed air cleaned after every sample. A QAQC inspection of SGS facilities was completed in October 2022 by Adriatic Metals.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	The half core sampling is considered a reasonable representation of the in-situ material. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates). All field duplicate, coarse duplicate and pulp duplicates are reviewed and compared. Standards and Blanks are investigated if over 2SD from certified mean and re-assay initiated if over 3SD or as required when over 2SD to validate materials either side of poorly performing blanks or standards.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample size of around 4-12kg is appropriate and to reasonably represent the material being tested.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Sample preparation was undertaken at the facilities of SGS in Ankara, Turkey. Assay analysis was completed at SGS Ankara, Turkey. All facilities are industry best practice and ISO certified. Multi elements were assayed by an ICP-AES technique following a four-acid digest. Gold was determined using a fire assay on nominal 30g charges. Barite was determined from a lithium meta-borate fusion followed by dissolution and ICP-AES analysis. Total carbon and sulphur was determined by a Leco analyzer. All techniques were appropriate for the elements being determined. Use of a 4-Acid digest is a near-total digestion of all minerals present. Additional XRF analysis is required to determine accurate concentrations of barium as part of reported assays.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the Analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	There was no reliance on determination of analysis by geophysical tools. All analyses as reported and used in any calculations are by ISO certified laboratories, (SGS Ankara), using calibrated, industry standard and recognized methods, QAQC and equipment.
	<i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i>	Certified Reference Materials ("CRM's"), certified blanks, quarter core replicates were considered to be appropriate for the elements being analysed. CRM's, blanks and replicates were added at a rate better than 1 in 15. All results reported by SGS on the CRMs and blanks were within 3 standard deviations (3SD). Where deviations greater than 2SD were noted, investigations were completed and where necessary samples above and below queried Standards and Blanks were re-assayed. To date returned results are considered to be representative of material sampled. A program of 5% of assay pulps being submitted for Umpire lab re-assay is under way as part of ongoing QAQC controls in addition to measures already in place.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	There has been no independent re-logging of mineralised intervals. Significant mineralisation is reviewed internally by multiple Senior geological staff, the Vares Project Exploration Manager, and Head of Exploration. Significant intercepts are visually verified daily as core is brought in for logging, included in summary logs, and then cross-checked during detailed logging.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>The use of twinned holes.</i>	None of the reported holes are twin holes. Holes completed are part of tight 'drill fans' with separation of holes between fans of 25m to 30m with respect to targeted ore zones. Separation distances are <25m between holes closer to surface. Several holes although not planned as twin holes, being drilled from adjacent drill platforms, have passed through the trace of previous holes and replicated mineralisation. Confirming position, grade and thickness.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Data is stored in a Cloud Server with server back-ups at various locations including Vares, Bosnia & Herzegovina and Cheltenham, UK. The data and databases is managed by consultants gDat Data Solutions in an acquire database. The acquire database is regularly backed-up.
	<i>Discuss any adjustment to assay data.</i>	No adjustments were necessary.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Sampling sites were surveyed using Total Station to better than 0.05m accuracy in the local BiH coordinate system.
	<i>Specification of the grid system used.</i>	The grid system used MGI 1901 / Balkans Zone 6.
	<i>Quality and adequacy of topographic control.</i>	The topographic surface of the immediate area was generated from a LiDAR survey to an accuracy of approximately 0.05m. It is considered sufficiently accurate for the Company's current activities. All drill collars have been compared to the LiDAR surface and physically validated where discrepancies in elevation or position were noted. Validation has been periodically required in mountainous terrain where holes post-date LiDAR and earthworks have been completed to establish drill pads.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Drill hole spacing does not exceed 50m which is considered acceptable for reporting exploration results. The nominal drill spacing is on 40m spaced sections. The primary method of drilling is to complete holes from a single drill platform in mountainous terrain. Holes are drilled as part of a 'fan' of holes. Design of holes aims to achieve a nominal 25m to 30m separation between mineralised zones to achieve either an Inferred or Indicated level of exploration confidence. No MRE has yet been completed for Rupice NW.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Drill hole spacing is deemed sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource classification to be applied. The data spacing is suitable for a stratabound, continuous style of polymetallic mineralisation with minimal structural disturbance or remobilisation.
	<i>Whether sample compositing has been applied.</i>	Sample compositing was not applied. Currently reported results are on a nominal 1m spacing unless samples have been character sampled or extended to visual contacts. Minimum sample size is 0.2m and maximum is 1.2m.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drill holes have been drilled at between 55-90° to the mineralised body. The mineralised body generally shallow dipping to the NE and plunging to the NW at angles of 30 to 40 degrees. Current drilling intersects mineralisation at generally a high oblique angle.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The drilling orientation has not introduced a sampling bias, as the drilling is at a high angle to the mineralised body (oblique).
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory. All sample collection was controlled by digital sample control file(s) and hard-copy ticket books. Transfer of samples from Vares to Ankara is by a dedicated enclosed commercial truck. No other freight is included with shipments. Weigh-bills are used as are multiple customs declarations. Dispatched samples have sample tickets included, are referenced to a pre-dispatch sample submission



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		sheet, and are cross-checked on receipt at laboratory. To date no discrepancies, sample loss or tampering with samples has been recorded.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Laboratory audits of SGS Ankara, Turkey, sample preparation and analysis facilities was made by--Sergei Smolonogov, Head of Exploration of Adriatic Metals, in October 2022. There were no material issues found for the 2022 drill programme. Areas for laboratory improvement were noted but were not considered material to sample QAQC outcomes at this time.

Section 2 Reporting of Exploration Results
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Rupice deposit is located within the Company's 100% owned Concession, No. 04-18-21389-1/13, located 13km west of Vares in Bosnia. There are no known material issues with any third party other than royalties due to the State.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Concession is in good standing with the governing authority and there is no known impediment to the Concession remaining in force until 2038 (25 years), subject to meeting all necessary reporting requirements.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Modern exploration commenced with the work of Energoinvest in the late 1960s. During 1968-1969 underground development of 455m of drives and cross cuts were made, and 11 surface trenches dug for a total length of 93.5m. Between 1980 and 1989, 49 holes were drilled for an advance of 5,690.8m. Sample material from all of these programs was routinely analysed for lead, zinc, and barite, and on occasion silver and gold. The deposit was the subject of a number of reserve estimates in the 1980s. This work is documented in many reports which are certified by those geoscientists and Institutes that undertook the work. The work is considered to be of a standard equal to that found within today's exploration industry.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The host rocks at Rupice comprise Middle Triassic limestone, dolostone, calcareous and dolomitic marl, and a range of mostly fine-grained siliciclastic rocks including cherty mudstone, mudstone, siltstone and fine-grained sandstone. The main mineralised horizon is a brecciated dolomitic unit that dips at around 50° to the northeast and has been preferentially mineralised with base, precious and transitional metals. The Triassic and Jurassic sequences have been deformed by early-stage ductile shearing and late stage brittle faulting. The Rupice polymetallic mineralisation consists of sphalerite, galena, barite and chalcocopyrite with gold, silver, tetrahedrite, boulangerite and bournonite, with pyrite. The majority of the high-grade mineralisation is hosted within a brecciated dolomitic unit, which is interpreted to be cross-cut by northwest striking, westerly dipping syn-post mineral faulting. This faulting is interpreted to displace the mineralised body. Thickening of the central portion of the orebody occurs in an area of structural complexity. Mineralised widths of up to 65m true thickness are seen in the central portion of the orebody. To date, the massive sulphide mineralisation at Rupice has a defined strike length of 650m, with an average true-width thickness of around 20m. However, recent drilling northwest of Rupice has intercepted a massive sulphide body referred to as Rupice NW. Rupice NW is yet not connected by drilling to Rupice mineralisation across an approximate strike gap of 90m. Rupice NW currently has a strike extent of approximately 250m with mineralisation remaining open in all directions. The Rupice NW mineralisation appears not impacted by deformation at the scale of drilling and compared to Rupice is a continuous tabular stratabound mineralized body. Multiple mineralized intercepts at Rupice NW have true thicknesses of over 40m along the centre axis of mineralization. Mineralisation away from the central NW-SE strike axis tapers away at the margins to <1.00m true thickness. This can be 60m to 80m away and either side from the strike axis centre line. The up-dip and down-dip extents of Rupice NW have not as yet been closed-off, therefore a true SW-NE width of mineralisation cannot be stated. The strike extent is similarly open. To the NW, the Rupice NW mineralisation appears to be thickening and widening on the last sections drilled. To the SE and closest to Rupice, mineralisation is still continuous, and has a thickness of up to 20m. There is a distance of only 90m to connect Rupice NW along strike to Rupice.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		<p>Rupice NW mineralisation is strongly associated with barite forming matrix to sulphides. Barite can be up 80% of mineralised zones. Galena, sphalerite, pyrite and chalcocopyrite are the most visible and identifiable sulphides during logging. The footwall zone below massive and semi-massive sulphides is pervasively silica -sericite altered with fine disseminated sulphides throughout and crosscut by base metal stringer zones and mineralized faults / shears. This alteration zone can extend 20m to 30m below massive and semi-massive sulphides. Overall, the footwall zone appears enriched in zinc.</p> <p>On the hangingwall of Rupice NW there is a pyrite rich, low barite, high base metal content horizon of mineralisation referred to as the Upper Zone. It is approximately 90m to 100m vertically above Rupice NW. It appears to be a mineralized zone occurring as matrix within a dolomite / limestone breccia. The mineralised Upper Zone marks the transition from Jurassic into mineralised Triassic sediments and generally occurs at the base of a major thrust zone.</p>
Drill hole information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> o <i>easting and northing of the drill hole collar</i> o <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> o <i>dip and azimuth of the hole</i> o <i>downhole length and interception depth</i> o <i>hole length.</i> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	Drilling data for the reported drill holes is included in Tables 1-3 of Appendix 1.
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p>	<p>Significant intercepts were calculated by applying a lower cut-off grade of 50g/t AgEq (<i>see notes in Table 1 for assumptions for AgEq & ZnEq calculations</i>),</p> <p>Grade recoveries of 90% and commodity prices as used for the Rupice updated MRE from 2020 were applied, since no metallurgical test work has been conducted on the Rupice Northwest extension area.</p> <p>1m minimum interval and maximum internal dilution of 5m. A top-cut was not applied. Significant intercepts were reported as weighted averages.</p>
	<p><i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p>	Short lengths of significant high-grade results were defined as >600 g/t AgEq, having a minimum 1m interval and maximum internal dilution of 5m. Results are shown in Table 1 of the main reporting document.
	<p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	Equivalent explanations are described in the body of the text.
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p>	Only downhole interval lengths are reported.
	<p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p>	The majority of the high-grade Rupice mineralisation is hosted within a brecciated dolomitic unit, which is cross-cut by northwest striking, westerly dipping syn-post mineral faulting. This faulting is interpreted to displace the mineralised body. Evidence of displacement is not yet apparent or confirmed. Thickening of the central portion of the orebody occurs in an area of interpreted local folding and deformation. Mineralised widths up to 65m true thickness are seen in the central portion of the orebody.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		<p>To date, the massive sulphide mineralisation at Rupice has a defined strike length of 650m with an average true-width thickness of around 20m. However, mineralisation at Rupice still remains open along strike to the NW, SE, up-dip and down-dip.</p> <p>Recent drilling by Eastern Mining was mostly inclined at between -55° and -67° to the southwest, perpendicular to the deposit strike, and intersected the mineralisation reasonably orthogonally.</p> <p>Similarly for Rupice NW. Drilling at 55 to 90 degrees has intersected mineralisation at a high angle to mineralisation dipping to the NE and plunging to the NW from 30 to 40 degrees.</p>
	<i>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').</i>	Only downhole lengths are reported.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All assay tables for all reported holes are included in the main reporting document.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	No substantive exploration data not already mentioned in the announcement or in this table have been used.
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<p>Further drilling will be undertaken in 2023 for mineralisation along strike, and up and down dip, dependent on exploration success and funding.</p> <p>Adriatic Metals has committed to fully defining Rupice NW within its exploration tenement to complete an updated Rupice MRE and Maiden Rupice NW MRE. Drilling will be on a 40m section spacing, with mineralization pierce points nominally 25m to 30m between hole intercepts. Fan drilling from a single drill platform per section will be used to intersect the majority of holes per section. Additional drill platforms will be constructed where a single fan cannot fully drill out a section.</p> <p>Specific focus will be placed on resolving whether Rupice NW can be connected to the main body of Rupice mineralisation across a 90m drilling gap. Diagrams showing areas of open mineralisation and opportunity are part of the main body of the public announcement.</p>